



LGE2304


N-Channel 30-V(D-S) Mosfet



1. GATE
2. SOURCE
3. DRAIN



SOT-23

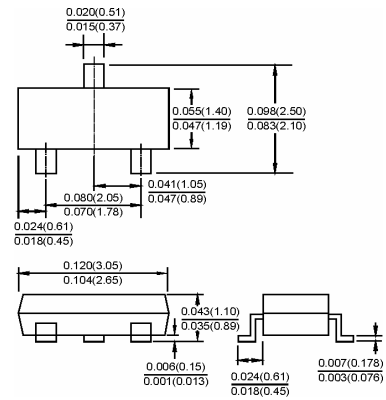

Dimensions in inches and (millimeters)

Features

TrenchFET Power MOSFET

Applications

- Load Switch for Portable Devices
- DC/DC Converter

MARKING: S4

Maximum ratings ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current	I_D	3.3	A
Pulsed Drain Current	I_{DM}	15	
Continuous Source-Drain Diode Current	I_S	0.9	
Maximum Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient ($t \leq 5s$)	$R_{\theta JA}$	357	$^{\circ}\text{C}/\text{W}$
Storage Temperature	T_J	150	$^{\circ}\text{C}$
Junction Temperature	T_{STG}	-55 ~ +150	


Electrical characteristics (T_a=25°C unless otherwise noted)

Parameter	Symbol	Test condition	Min	Typ	Max	Units	
Static							
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	30			V	
Gate-source threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.2		2.2		
Gate-body leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V			±100	nA	
Zero gate voltage drain current	I _{DSS}	V _{DS} = 30V, V _{GS} = 0V			1	μA	
Drain-source on-state resistance ^a	R _{DS(on)}	V _{GS} = 10V, I _D = 3.2A		0.049	0.060	Ω	
		V _{GS} = 4.5V, I _D = 2.8A		0.061	0.075		
Forward transconductance ^a	g _{fs}	V _{DS} = 4.5V, I _D = 2.5A	3			S	
Dynamic^b							
Total gate charge	Q _g	V _{DS} = 15V, V _{GS} = 10V, I _D = 3.4A		4.5	6.7	nC	
					2.1		3.2
					0.85		
Gate-source charge	Q _{gs}	V _{DS} = 15V, V _{GS} = 4.5V, I _D = 3.4A		0.65			
Gate-drain charge	Q _{gd}			0.8			
Gate resistance	R _g	f = 1.0MHz	0.8	4.4	8.8	Ω	
Input capacitance	C _{iss}	V _{DS} = 15V, V _{GS} = 0V, f = 1MHz		235		pF	
Output capacitance	C _{oss}			45			
Reverse transfer capacitance	C _{rss}			17			
Turn-on delay Time	t _{d(on)}	V _{DD} = 15V, R _L = 5.6Ω, I _D ≈ 2.7A, V _{GEN} = 4.5V, R _g = 1Ω		12	20	ns	
Rise time	t _r			50	75		
Turn-off delay time	t _{d(off)}			12	20		
Fall time	t _f			22	35		
Turn-on delay time	t _{d(on)}	V _{DD} = 15V, R _L = 5.6Ω, I _D ≈ 2.7A, V _{GEN} = 10V, R _g = 1Ω		5	10	ns	
Rise time	t _r			12	20		
Turn-off delay time	t _{d(off)}			10	15		
Fall time	t _f			5	10		
Drain-source body diode characteristics							
Continuous source-drain diode current	I _S	T _C = 25°C			1.4	A	
Pulse diode forward current	I _{SM}				15		
Body diode voltage	V _{SD}	I _S = -2.7A, V _{GS} = 0V		0.8	1.2	V	


Notes :

- a. Pulse Test : Pulse width ≤ 300μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.




Typical Characteristics


Output Characteristics

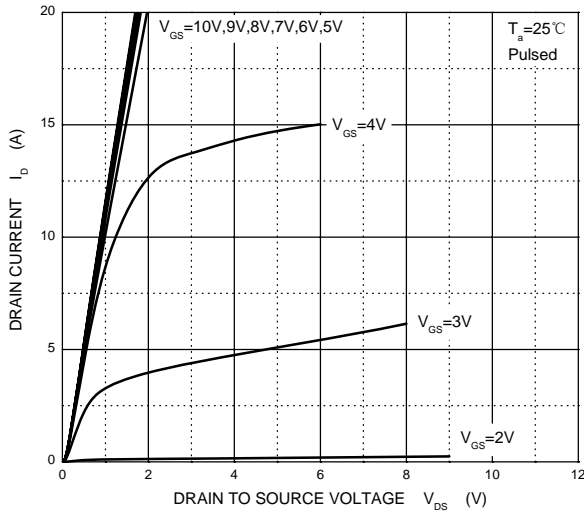


Transfer Characteristics

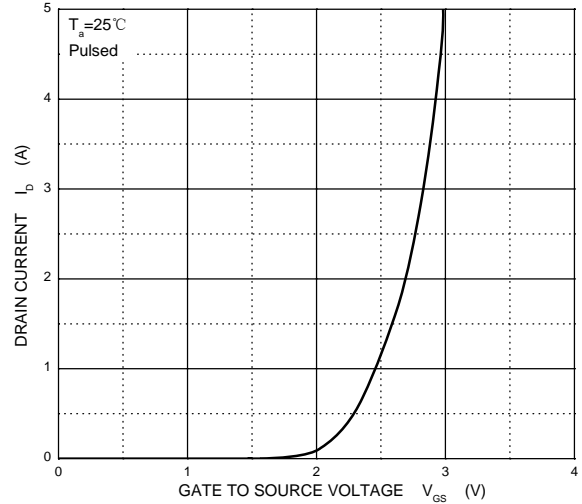


$R_{DS(ON)}$ — I_D

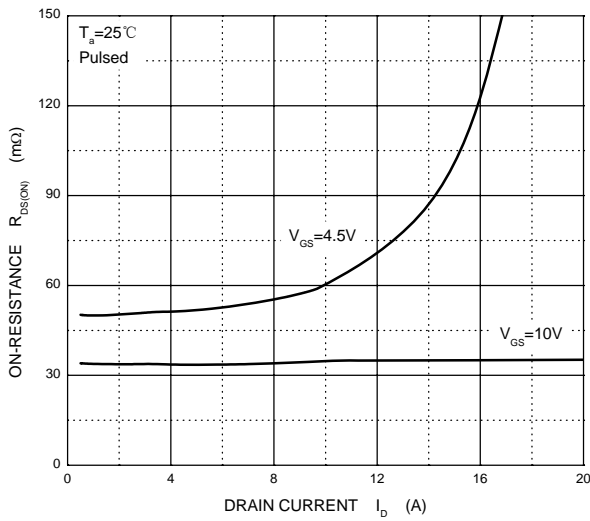

$R_{DS(ON)}$ — V_{GS}

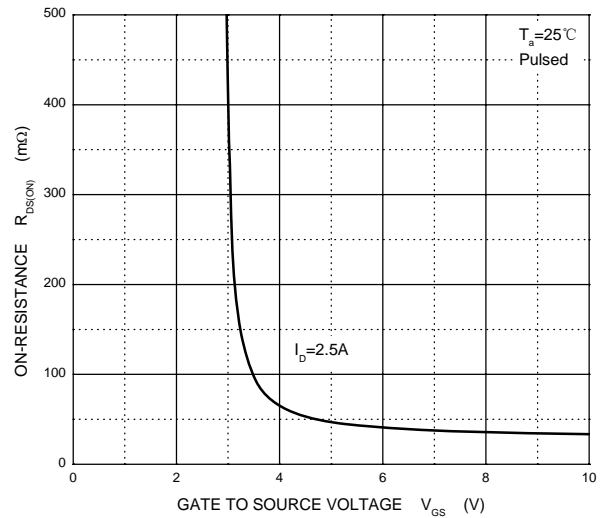

I_S — V_{SD}

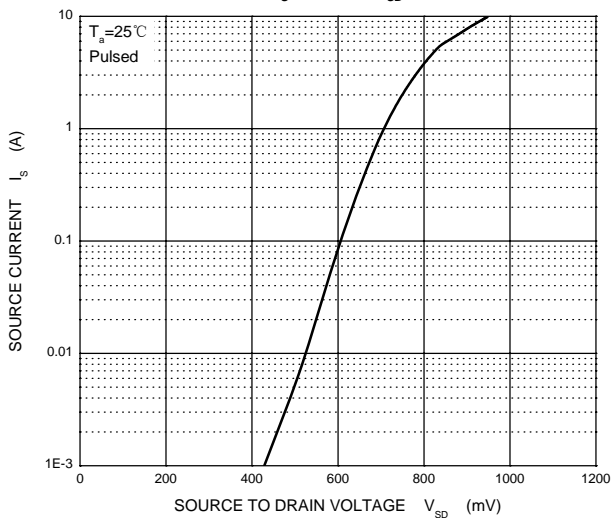

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Luguang](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [D2003UK](#) [705463DB](#) [MCH6422-TL-E](#) [FW231A-TL-E](#) [APT5010JFLL](#) [NTNS3A92PZT5G](#) [IRF100S201](#) [JANTX2N5237](#)
[2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FQD4P40TM_AM002](#) [FSS804-TL-E](#) [FW217A-TL-2W](#)
[APT10050JVFR](#) [2SJ277-DL-E](#) [2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D1014UK](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#)
[IRF3710](#) [367-8430-0972-503](#) [VN1206L](#) [424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#)
[IPS70R2K0CEAKMA1](#) [APT8015JVFR](#) [APT50M85JVR](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [NTE6400](#) [NVC3S5A51PLZT1G](#)
[JANTX2N6796U](#) [JANTX2N6784U](#)