



Platoshear Ergonomic Cutter

170LX

Plato shears have a thin profile designed for those hard-to-reach areas in electronic assembly. Assemblers love the effortless shearing action, comfort, light weight, and safety for electronics lead and wire cutting. Platoshears use the shear cutting method, which requires 50% less operator effort and extends cutting life because they shear rather than pinch. Handles are cushioned for day long comfort, and automatically spring back to their original position after each use.

Plato solder pots are ideal for tinning lead wires, pre-tinning small electrical parts, or dip soldering small assemblies and circuit devices. **Porcelain Coated Crucibles** Plato's porcelain coated crucible is easy to clean and offers a long service life. Solder will not adhere to the porcelainized surface, allowing for easy maintenance. The coating also resists the corrosion common with activated fluxes and high tin content solders. All Plato solder pots can be ordered with a porcelain coated crucible by adding a "P" to the end of the part number.




Ergonomic, ESD-safe shear lead cutter

The 170LX is a remarkable advancement in cutter design. Carefully crafted precision cutting blades combine seamlessly with curved, palm shaped, handles to deliver effortless lead cutting and user comfort.

Product Dimensions


170LX Platoshear Ergonomic Cutter

10 units/case

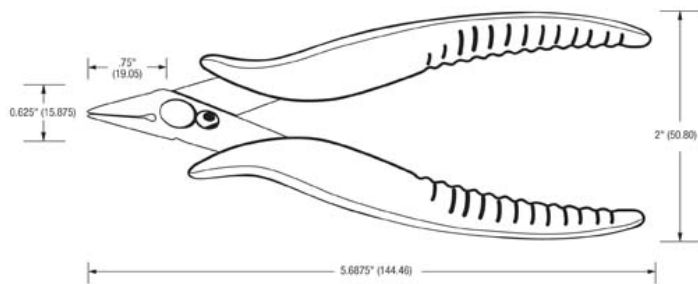

175LX Platoshear Ergonomic Cutter w/Safety Guard

10 units/case

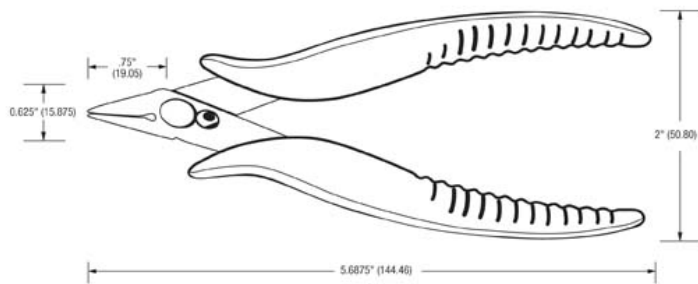

Techspray
 P.O. Box 949, Amarillo, TX 79105
 800-858-4043 • www.techspray.com



Environmental Policy

Techspray is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

Resources

Techspray products are supported by a global sales, technical and customer services resources.

For additional technical information on this product or other Techspray products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

North America

Techspray
P.O. Box 949
Amarillo, TX 79105
800-858-4043
Email: tsales@techspray.com

Europe

ITW Contamination Control
Saffierlaan 5
2132 VZ Hoofddorp
The Netherlands
+31 88 1307 400
Email: info@itw-cc.com

Countries Outside US

Call to locate a distributor in your country.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

© 2013 Techspray, A Division of ITW

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Techspray manufacturer](#):

Other Similar products are found below :

[2357-100](#) [2412-12S](#) [2301-1000](#) [2302-50](#) [1632-16S](#) [2001-144](#) [3045-QT](#) [3125-9S](#) [1635-20S](#) [2307-1000](#) [2402-12S](#) [2303-50](#) [1802-100F](#) [1621-5G](#) [1806-100F](#) [1686-12S](#) [3070-19S](#) [1978-DP](#) [1733-G](#) [2303-1000](#) [2316-50](#) [2106-12S](#) [2313-30](#) [1693-DSP](#) [1823-100F](#) [1720-5G](#) [2309-10](#) [1580-10S](#) [20-0110](#) [2355-100](#) [2368-2](#) [2351-100](#) [1726-QT](#) [2314-10](#) [1505-QT](#) [2365-300](#) [1610-5G](#) [1821-50F](#) [2310-10](#) [2110-P](#) [1663-18S](#) [170S](#) [1803-100F](#) [1809-25F](#) [2350-100](#) [2363-50](#) [1613-6S](#) [1697-8S](#) [3065-15S](#) [1666-18S](#)