

Valve Lockouts

BradyID.com/lockouttagout



Plug Valve Lockout

- Ideal for difficult-to-secure plug valves in compliance with OSHA standards
- Four sizes to fit most 1" to 8" diameter manually-actuated plug valves
- Durable and tamper-resistant
- Service temps from -25°F to 200°F
- Compact in size and easy to use

Catalog #	Description
113231	Lockout for up to 7/8" Stem Dia.
113232	Lockout for 15/16" to 1-3/8" Stem Dia.
113233	Lockout for 1-3/4" to 2-1/8" Stem Dia.
113234	Lockout for 2-3/16" to 2-1/2" Stem Dia.



Adjustable Gate Valve Lockout

- Versatile lockout adjusts to fit 1" to 6-1/2" valve handles, replacing 3 conventional gate valve lockouts
- Constructed of rugged injection-molded polypropylene
- Service temps from -13°F to 194°F
- Supplied with English, Spanish and French danger labels

Catalog #	Description
64057	Adjustable Gate Valve Lockout



Gate Valve Lockouts

- Unique knockout center fits OS&Y or "rising stem" valves
- Made of rugged injection-molded polypropylene
- Service temps from -25°F to 200°F
- Accepts shackles up to 3/8" in dia.
- Supplied with English, Spanish and French danger labels


Fits Valve Handles Dia.	Red	Yellow	Green	Blue
1" to 2-1/2"	65560	65590	65595	65585
2-1/2" to 5"	65561	65591	65596	65586
5" to 6-1/2"	65562	65592	65597	65587
6-1/2" to 10"	65563	65593	65598	65588
10" to 13"	65564	65594	65599	65589



Prinzing Ball Valve Lockout

- Made from ultra-tuff polypropylene
- Small size locks out pipes 1/2" to 2-1/2" in diameter
- Small size can also lock valves OPEN on pipes from 1/2" to 1-1/4" in diameter
- Large size locks out pipes 2" to 8" in diameter

Catalog #	Size	Color
BS07A-RD	Small	Red
BS08A-RD	Large	Red
BS07A-BU	Small	Blue
BS08A-BU	Large	Blue
BS07A-GN	Small	Green
BS08A-GN	Large	Green
BS07A-YW	Small	Yellow
BS08A-YW	Large	Yellow

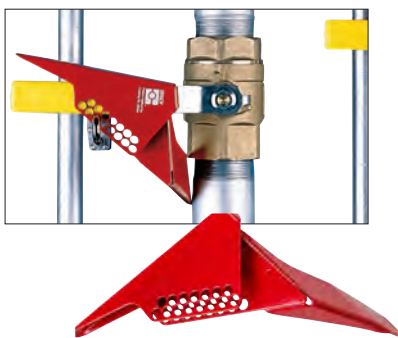

Standard Ball Valve Lockout

- Easy to use, single-piece design locks quarter-turn ball valves in OFF position
- Two sizes fit most valves up to 3"
- 65666 is made of super-tough nylon (service temp -40° to 248° F)
- 65692, 65669 and 65693 are made of powder-coated steel

Catalog #	Max Shackle Dia.	Valve Size / Pipe Dia.	Max Handle Width	Max Handle Thickness
65666	9/32"	1/4" to 1"	1-1/2"	3/4"
65692	3/8"	1/4" to 1"	1-1/2"	3/4"
65669	9/32"	1-1/4" to 3"	2-1/10"	1 1/4"
65693	3/8"	1-1/4" to 3"	1-9/10"	1 1/4"



Perma-Mount™ Ball Valve Lockout

- Retrofit devices stay permanently in place at the point of need
- One-time installation is easy to complete in just a few minutes
- Available in 2 sizes to fit a full range of 0.5" to 4" diameter ball valves

Catalog #	Size
121540	Small Perma-Mount Ball Valve Lockout
121541	Large Perma-Mount Ball Valve Lockout

Lockout Tagout

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [brady](#) manufacturer:

Other Similar products are found below :

[BMP21-PLUS-KIT1](#) [M71C-2000-595-YL](#) [66271](#) [67063](#) [DAT-38-292-1](#) [DAT-38-292-2.5](#) [DAT-43-502-1](#) [134304](#) [ECL-107-619](#) [18453](#)
[18617](#) [18669](#) [LAT-31-747-1](#) [LAT-5-747-10](#) [SCN03-1](#) [SCN03-8](#) [SCN10-7](#) [SCN10-8](#) [18472](#) [18489](#) [18581](#) [AF-1-9-PK](#) [PSPT-187-175-YL](#)
[29690](#) [PTL-17-422](#) [PTL-42-439](#) [PWC-PK-1](#) [33108](#) [3450-A](#) [3450-D](#) [3450-G](#) [34511](#) [34513](#) [34515](#) [34517](#) [34518](#) [35400](#) [M71-22-423](#) [THT-](#)
[12-727-10](#) [THT-17-7546-3](#) [THT-38-724-10](#) [THT-5-449-10](#) [THT-55-424-1](#) [THT-6-428-10](#) [THT-7-424-3](#) [33054](#) [33104](#) [33107](#) [3450-C](#) [3450-](#)
[E](#)