



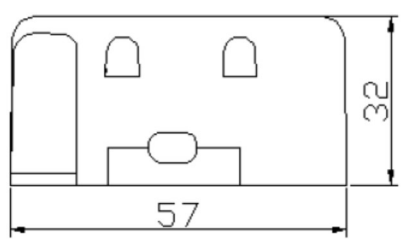

LED Power Supply Constant Voltage	
Model	LNG7512C
Voltage	12V
Current	6.25A
Power	75W

Input	Rated input voltage	230 VAC	
	Range of input voltage	220-240VAC	
	Frequency	50Hz	
	Power Factor	>0.9@Full Load, 240VAC	
	Current	0.5 A MAX. @Full Load	
	Start-Up time	<0.5S for ERP @Full Load	
	Inrush Current	60A MAX. @Full Load, 240 VAC	
	Unload Power Consumption	≤2W	
Output	Unload voltage	12.6VDC MAX	
	Load Voltage rang	NC	
	Constant Voltage	12V	
	Voltage Accuracy	±5% @220-240VAC	
	Voltage Regulation	≤3%@Full Load	
	Hold-up Time	<1s max,Io=0mA	
	Efficiency in full load	≥85%@Full Load ,240VAC	
	Ripple	NA	
	Power Max	75W	
Dimming	Dimmable or not	NA	
	Dimming mode	NA	
	Dimming current range	NA	
Protection	Over load Protection	105-150% Protection type: Auto Restore	
	Over Voltage Protection	>16VDC Protection type: Auto Restore	
	Short circuit Protection	Protection type: Auto Restore	
	Over Temperature protection	Protection type: Auto Restore	
	HI-pot	Input-Output(V.AC)	3000V/5mA/1min
	Input-FG(V.AC)	NA	
	Output-FG(V.AC)	NA	
	Leakage Current	<0.5mA(240VAC)	
Isolation	Input-Output(V.AC)	≥10MΩ@500VDC	
	Input-FG(V.AC)	NA	
	Output-FG(V.AC)	NA	
Environment/Life	Operating Temperature	-10°C...+40°C	
	tc	85°C	
	Storage Temperature	-20°C...+60°C	
	Humidity	20%-90%RH	
	Life time	>30,000h @50°C	
	HSF requirement	RoHS	
Feature	Dmension	171*57*32(LXWXH)mm	
	Approval	CE	
Safety @ EMC	Safety standards	EN 61347-1; EN61347-2-13 EN60598-1; EN60598-2-6	
	EMI	EN55015; EN61000-3-2 Class C EN61000-3-3	
	EMS		EN61547; EN 61000-4-2 - 8KV; 4KV
			Performance Criteria B
			EN 61000-4-5 — 1000V; Performance Criteria C


LED Power Supply Constant Voltage	
Model	LNG7512C
Voltage	12V
Current	6.25A
Power	75W

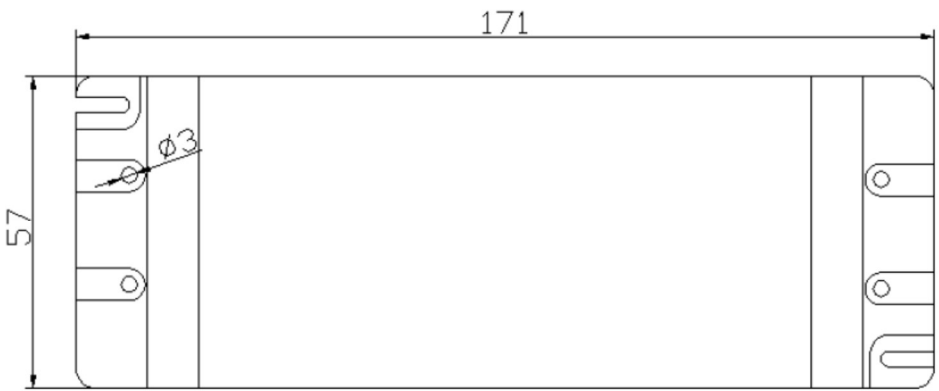

**LABEL:**

ESPE

LED POWER SUPPLY



**LNG7512C**

---

INPUT.....230VAC  
50Hz 0.5A

OUTPUT.....12V  $\Rightarrow$  6.25A

$\lambda \geq 0.9$      $t_c: 85^\circ\text{C}$      $t_a: 40^\circ\text{C}$     •  $t_c$


Constant Voltage


N


+


L


-





















IP20

CE



SELV

MADE IN CHINA

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies category](#):*

*Click to view products by [Espe manufacturer](#):*

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#)  
[LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#)  
[LE42S24VN](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-](#)  
[S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [79278](#)  
[MU060C105AQ\\_0-10V](#) [EUD-150S350DVA](#) [LSWC-040S105PS](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELEMENT](#)  
[30/220-240/700 S](#) [OT FIT 38/220-240/900 CS S MINI](#) [ELEMENT 180/220-240/24 G2](#) [PWM-40-36](#) [PWM-60-36](#) [LUD-060S150BSF](#) [RCD-48-1.00](#)  
[ESS010W-0750-12](#) [EUC-036S035DV](#) [EUC-036S045DV](#) [EUC-036S070SV](#) [EUC-042S105DS](#)