



Cat. 5e Modular Plug, Toolless

Part no.: MP0026

Technical Features


Cat. 5e UTP Modular Plug, Toolless

Round Cable O.D.: max. 5,3mm

For AWG 24-26 solid or stranded wire

Color: White

Technical Drawings

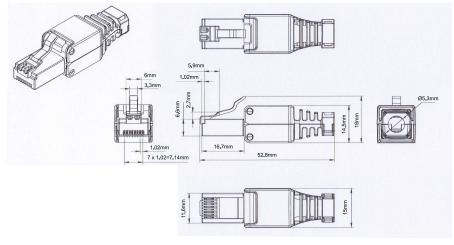

Electrical

1. Voltage Rating: 125 VAC RMS

2. Current Rating: 1.5AMP

3. Contact Resistance: 100MILLIOHMS MAX

4. Insulation Resistance: 1000 MEGOHMS MIN @500VDC

5. Dielectric Strength: 750 VAC RMS 60Hz, 1MIN

Environmental

1. Storage: -40°C~85°C

2. Operation: 0°C~70°C

Mechanical

1. Housing Material: PC

2. Insert Material: Fame Retardancy PBT

3. PCB Material: FR-4 T=1.6mm

4. Contact Material: Phosphor Bronze Stamp PIN T=0.30mm

5. RJ45 Jack; Life:750 FTIMES MIN

6. Wire: AWG 24-26









Package Contents

1 x Cat. 5e Modular Plug, Toolless

Packaging Informations	
Packing Dimension	100 x 70 x 15mm
Packing Weight	0.01kg
Carton Dimension	620 x 420 x 230mm
Carton Q'ty	1000pcs
Carton Weight	9.5kg





















X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Modular Connectors / Ethernet Connectors category:

Click to view products by Logilink manufacturer:

Other Similar products are found below:

RJE231881317T MP1010RX-1000 MP44RX-1000 GAX-3-66 GAX-8-62 93606-0253 GD-A-44 GDCX-PN-64 GDCX-PN-66 GDCX-PN-66-50 GDLX-A-66 GDLX-A-88 GDLX-N-66 GDLX-S-66 GDLX-S-88K GDTX-S-88-50 GDX-PA-1010 GLX-A-44 GLX-N-1010M-BLK GLX-N-44M GLX-S-88M-BLK GMX-N-1010 GMX-S-1010 GMX-SMT2-N-1010 GMX-SMT2-N-64-50 GMX-SMT2-S6-88 GMX-SMT4-N-88 GPX-2-64 GRT1-BT1-5 GSGX-N-2-88 GSX-NS2-88-3.05 GSX-NS2-88-3.05-50 GSX-NS-88-3.05-50 GSX-NS-88-3.05-50 GSX-NS-88-3.68 1-1775629-2 GWLX-S-88-GR GWLX-S9-88-YG 1300500326 1300500227 1300530003 1300570002 1324640-4 RJ11FTVC2G RJ11FTVC2N RJFTVX2SA1G 1400000 1413176 1413235 MP88X-1000