


M75DT004 Datasheet

Technical Specifications

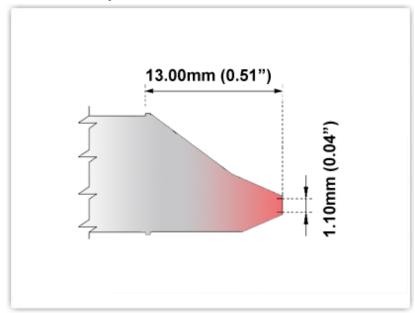

M75DT004

Desoldering Tip - Inner Diameter 1.10mm (0.04")

Tip Style: Desoldering
Tip Width: 1.10mm (0.04")
Tip Length: 13.00mm (0.51")

750 Type Cartridge¹: 350°C - 398°C


RoHS Compliant² / Lead Free: YES

Equivalent to: STDC-104

For Use With: TMT-9000S-1, TMT-9000S-2, MX-500, MX-5200

Material Composition

Patented Color Band

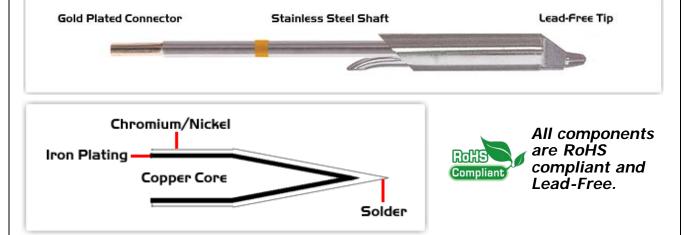

¹ Thermaltronics tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Thermaltronics offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method, technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

² Please refer to http://www.rohs.gov.uk for details on RoHS Compliance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Soldering Irons category:

Click to view products by Thermaltronics manufacturer:

Other Similar products are found below:

0052918099 918100-TE R300115 SFV-DRK30AR SMTC-0167 SMTC-1121 SMTC-1169-PK SMTC-588 SMTC-8170 AC-CK1 AC-CK2 SSC-601A SSC-625A SSC-638A SSC-726A SSC-774A FG-BVX STTC-065 STTC-114 STV-CH24A PHT-753077 PTK7-B RT6MS RTW3MS SCP-CH25 SFP-DRH05 SMTC-101 SMTC-113 SMTC-160-PK SMTC-1BL250 SSC-645A SSC-713A SSC-742A SSC-745A SSC-746A SSC-770A SSC-772A STTC-120 STTC-513 STTC-545 STTC-547 TATC-609 T0054487399 T0054474199 T0054442699 T0054440899 SMTC-004 T0054441099 T0054440499 PTTC-801B