

Dual Diode Power Modules are designed for use in power electronic circuits and equipment under normal operating conditions.

### KEY PARAMETERS

$U_{RRM}$	up to	1800 V
$I_{F(AV)}$		660 A
$I_{FSM}$		18000 A



### APPLICATION

- High Voltage Power Supplies
- Motor Control
- Battery Chargers
- Resistance Welding

### FEATURES

- electrically isolated base
- high current capabilities
- high surge current capabilities
- high rates voltages
- low thermal impedance (Aluminium Nitride Insulators)
- tested according to IEC standards
- compact size and small weight


Designed for use in high power industrial and commercial power electronic circuits and equipment where high currents are encountered and high reliability is essential.

### ORDERING INFORMATION

When ordering please refer to device code builder presented below.

Please use the complete part number when ordering, quote or in any future correspondence relating to your order.

**MD**  **-660-**

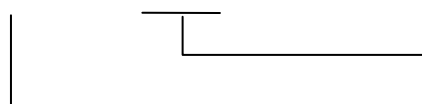

Voltage class (hundred volts)

Elements configuration (see drawings)

# MD\_-660 Dual Diode Power Module



KKMDx660, December 2009 version

## ELECTRICAL PARAMETERS

### Voltage ratings

Voltage class	$U_{RRM}$	$U_{RSM}$	$I_{RRM}$
	V	V	mA
04	400	500	50
06	600	700	
08	800	900	
10	1000	1100	
12	1200	1300	
14	1400	1500	
16	1600	1700	
18	1800	1900	

### Electrical properties

Parameter		Unit	Test conditions	Value
Average forward current @ case temperature	$I_{F(AV)}$	A		660
	$T_c$	°C		100
RMS forward current	$I_{F(RMS)}$	A		1036
Surge current	$I_{FSM}$	A	$T_j = T_{jmax}$ , $U_R = 0,8U_{RRM}$ , $t_p = 10ms$	18000
$I^2t$ – value	$I^2t$	$kA^2s$		1620
Forward voltage drop max.	$U_{FM}$	V	$T_j = 25^\circ C$ , $I_{FM} = 1500A$	1,11
Threshold voltage	$U_{F(T0)}$	V		0,60
Slope resistance	$r_F$	$m\Omega$		0,3
RMS isolation voltage	$U_{isol}$	V	1 s, circuit to base, all terminals shorted	2500

Zakłady Elektronowe LAMINA S.A.  
Puławska 34  
PL-05-500 Piaseczno  
POLAND

Tel.: +48-22-7572731  
Tel.: +48-22-3989409  
Fax: +48-22-7500884  
e-mail: sekretariat@lamina.com.pl  
www.lamina.com.pl

# MD\_-660 Dual Diode Power Module

KKMDx660, December 2009 version

## Thermal properties


Parameter	Unit	Test conditions	Value	
Thermal resistance, junction to case per diode/per module	$R_{thjc}$	°C/W	DC	0,065 / 0,0325
Thermal resistance, case to heatsink per diode/per module	$R_{thch}$	°C/W		0,02 / 0,01
Operating junction temperature	$T_{jmin}...T_{jmax}$	°C		-40...+150
Storage temperature	$T_{stg}$	°C		-40...+150

## Mechanical properties


Parameter	Unit	Value	
Mounting torque (M6)	M1	Nm	6,00 ±15%
Terminal connection torque (M10)	M2	Nm	12,00 ±10%
Weight	M	g	1490

## Configurations


**MDA**  
Terminal number:

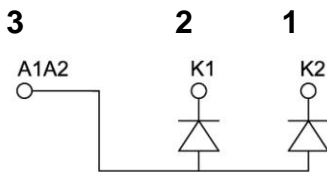


**MDC**  
Terminal number:

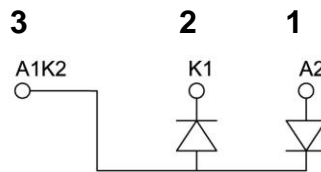

**MDE**  
Terminal number:

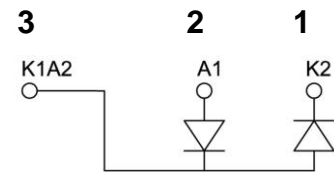


**MDK**  
Terminal number:

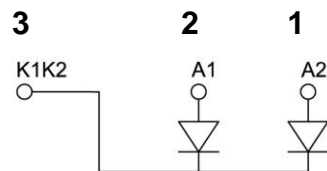

# MD\_-660 Dual Diode Power Module

KKMDx660, December 2009 version

## Package details




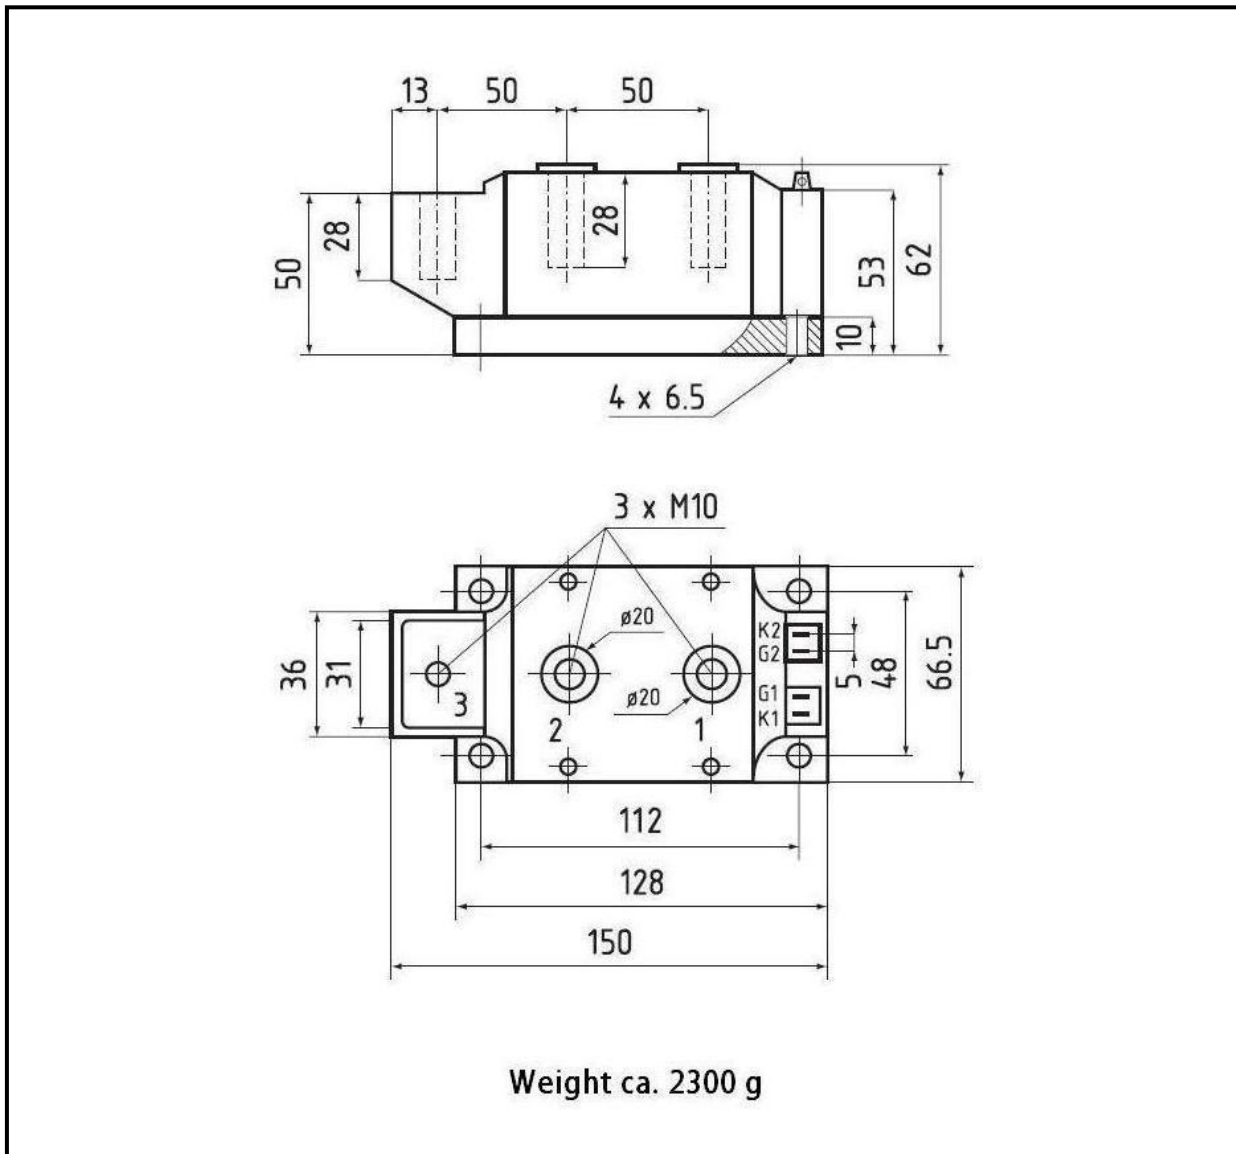


For further package information, please contact Sales & Marketing Department. All dimensions in mm, unless stated otherwise.  
Do not scale.

# MD\_-660 Dual Diode Power Module


KKMDx660, December 2009 version

## CHARACTERISTICS

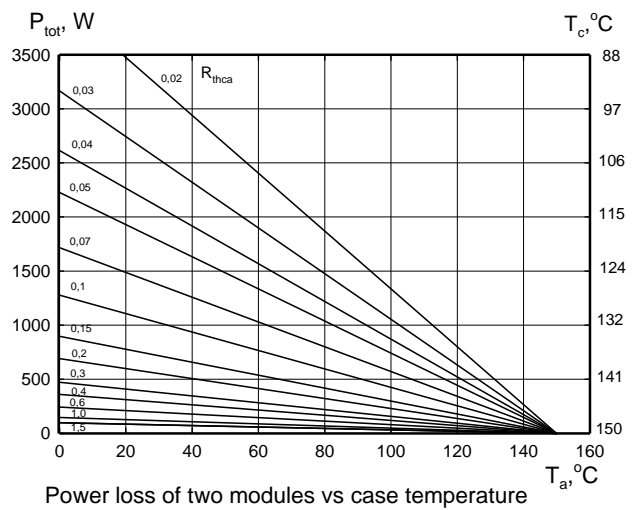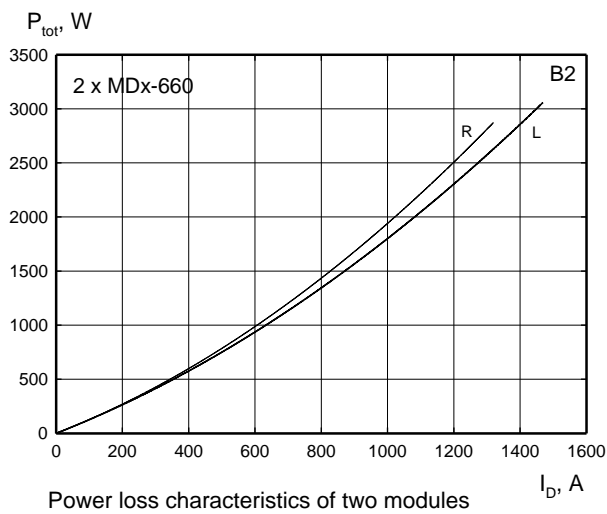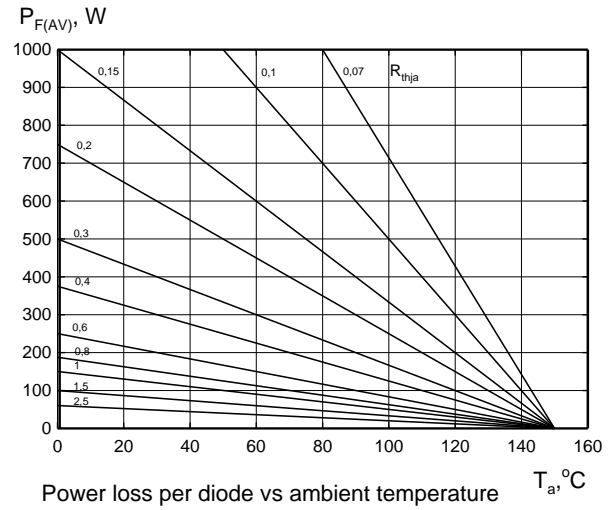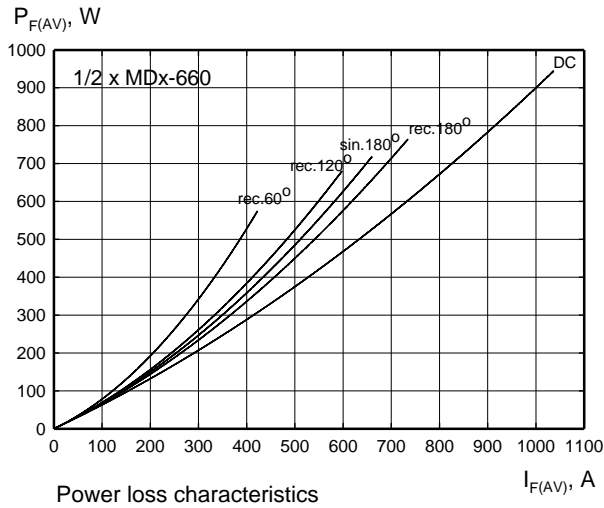


# MD\_-660 Dual Diode Power Module


KKMDx660, December 2009 version

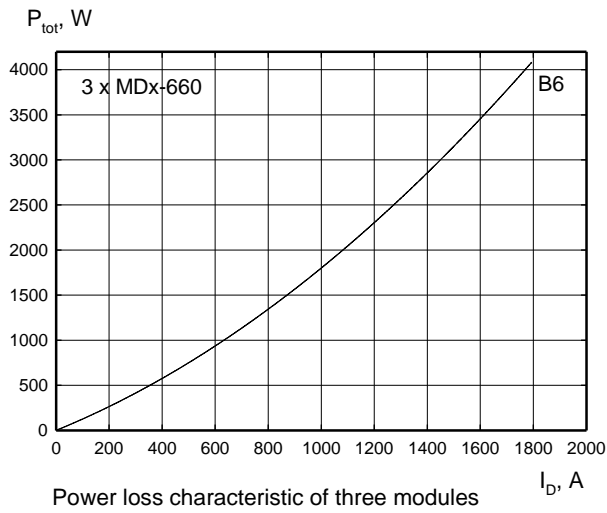


Power loss characteristic of three modules

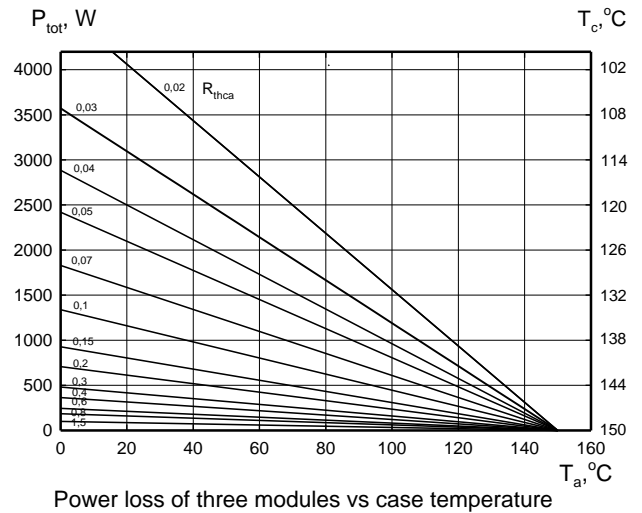

Power loss of three modules vs case temperature

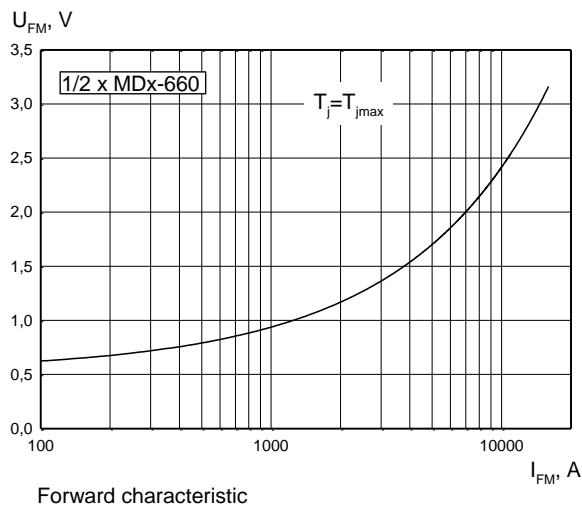

Forward characteristic

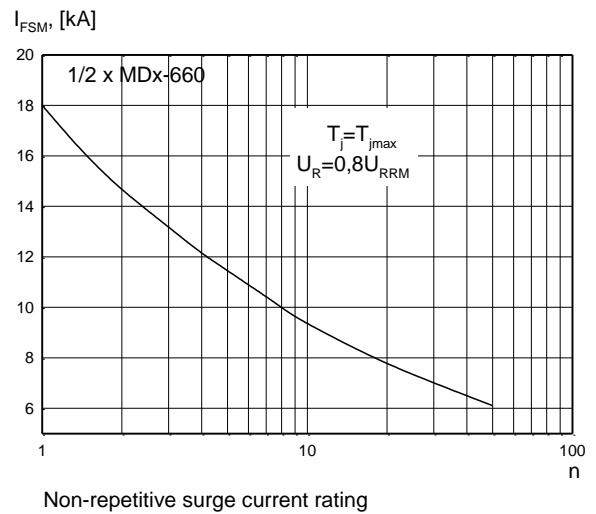


Non-repetitive surge current rating

# MD\_-660 Dual Diode Power Module

KKMDx660, December 2009 version

---

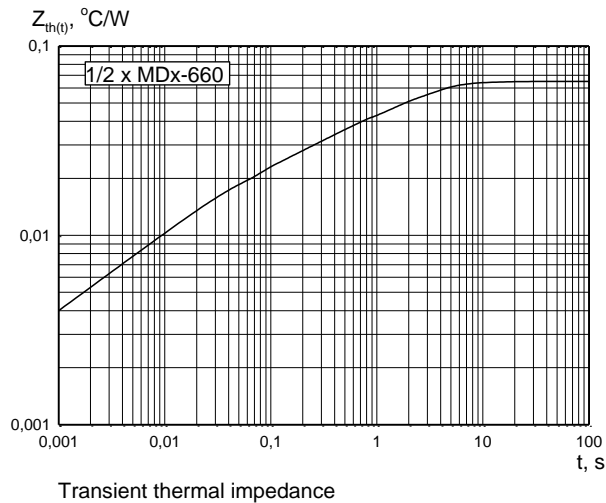

## HEATSINKS

ZE LAMINA S.A. has its own proprietary range of extruded aluminium heatsinks designed to optimise the performance of our semiconductors with natural and forced air flow.

## POWER ASSEMBLY CAPABILITY

ZE LAMINA S.A. provides a support for those customers requiring more than a basic semiconductor and offers precisely assembled Power Blocks according to factory or customer standards.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [KUBARA LAMINA](#) manufacturer:*

Other Similar products are found below :

[CUS06\(Te85L,Q,M\)](#) [MA4E2508M-1112](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#)  
[PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [D83C](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#)  
[BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 15-099R E6327](#) [BAT 54-02LRH E6327](#) [NRVBAF360T3G](#) [NRVTS10100MFST1G](#)  
[NRVTS12100EMFST1G](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#)  
[SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS3045CPIRG](#) [STPS30S45CW](#)  
[PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(Te85L,QM\)](#) [CRS10I30B\(Te85L,QM\)](#) [MBR1240MFST1G](#) [MBR20100CT-BP](#) [MBRB30H30CT-1G](#)  
[BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [BYS11-90-E3TR3](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#)