

LOCTITE®

Loctite® 5610 Two-Part Silicone Adhesive Sealant



Product Information

Product	Pack sizes	IDH No.**
Loctite® 5610 A&B Black	400 ml dual cartridge*	1043815
Loctite® 5610 Black Part A	17 l pail	1039401
Loctite® 5610 Part B	17 l pail	1043814
Loctite® 5610 Black Part A	160 l drum	1043813
Loctite® 5610 Part B	160 l drum	1043812



Dispensing Equipment

Product	Pack sizes	IDH No.**
Dual Cartridge Manual Applicator Hand-held, manually operated dispenser	400 ml	218312
Dual Cartridge Pneumatic Applicator Hand-held, pneumatically operated meter mix applicator	400 ml	218311
Mix nozzle Stepped tip, 5.125" Overall length, 7.5 mm	10 pcs	478563
Extrusion Pail Pump For pails and drums		647717



* 400ml dual cartridge contains both parts A and B.
** IDH-No. refer to UK and German product version.



Henkel

Henkel Loctite
Adhesives Ltd
Technologies House
Wood Lane End
Hemel Hempstead
Hertfordshire HP2 4BQ
Tel.: 01442 278100
Fax: 01442 278071

www.loctite.co.uk

Henkel KGaA
Standort München
Gutenbergstraße 3
D-85748 Garching
Tel.: +49 89 9268 0
Fax: +49 89 910 1978
info.marketing@henkel.com

www.loctite.de

The data contained herein are intended as reference only. Please contact your local Henkel Technical Support Group for assistance and recommendation on specifications for these products.

® designates a trademark of Henkel KGaA or its affiliates, registered in Germany and elsewhere.
© Henkel KGaA, 2007



Henkel

Loctite® 5610 Two-Part Silicone Adhesive Sealant



Fast curing elastic adhesive sealant Loctite® 5610 bonds and seals with excellent adhesion to metal, glass, ceramics and most plastics & elastomers.



Achieving fast cure speed, independent of narrow or wide joint application areas, Loctite® 5610 offers handling strength within minutes.

High strength and flexibility with excellent humidity and heat resistance makes Loctite® 5610 the ideal solution in a host of applications.

Loctite® 5610 is based on neutral cure technology offering health & safety advantages, low odour and no release of acetic acid avoiding metal corrosion or degradation of plastic materials.

Versatile Solution

- ▶ **Fast curing:** Reduces handling and work-in-process
- ▶ **High adhesion:** No surface preparation required for many substrates
- ▶ **Unlimited depth of cure:** Cures in narrow and wide joint application areas
- ▶ **Temperature resistant:** Continuous temperature up to 180°C with transient peaks of up to 250°C
- ▶ **Automation:** Easy to dispense with Loctite® equipment

Technical Data

GENERAL PROPERTIES	
Mixing ratio	2:1 by volume
Shelf life	12 months
Colour	Black
CURING PROPERTIES	
Open time	3 min
Fixture time	5 min
Tack free time	5 – 7 min
PERFORMANCE PROPERTIES	
Tensile strength	1.4 N/mm ²
Elongation at break	200%
Shear strength, aluminium	1.1 N/mm ²
Shear strength, steel	1.0 N/mm ²

Typical Applications

Appliance

- ▶ Glass and ceramic stove tops bonding and sealing to frame
- ▶ Bonding brackets to back of stove tops
- ▶ Bonding glass to microwave oven doors
- ▶ Washing machine sealing and bonding
- ▶ Cabinet and panel bonding and sealing

Photovoltaic


- ▶ Frame to glass sealing and bonding
- ▶ Bracket bonding
- ▶ Connection box sealing

HVAC

- ▶ Cabinet and panel bonding and sealing
- ▶ Replace gaskets and mechanical fixing
- ▶ Sealing conduit entries
- ▶ Bonding heat insulating materials

Lighting

- ▶ Bond glass to reflector or frame
- ▶ Bonding of integrated electrical ballast

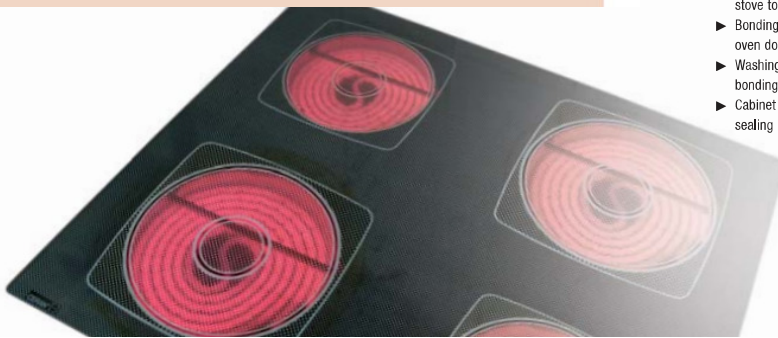

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Loctite](#) manufacturer:

Other Similar products are found below :

[2003721](#) [2701](#) [5080,GREY 50M X 50MM](#) [37684](#) [GC 10 TYPE 4 \(JAR\)](#) [97262](#) [406](#) [577, 250ML](#) [603, 10ML](#) [542, 250ML](#) [330, 50ML &](#)
[7388, 40ML](#) [GLUE REMOVER, 5G](#) [270, 50ML](#) [262, 50ML](#) [40945](#) [98454](#) [3526](#) [SUPER GLUE GLASS, 3G](#) [4080, 50G](#) [460, 50G](#) [641,](#)
[50ML](#) [495, 50G](#) [55, 160M](#) [7360](#) [LT 5075](#) [242, 50ML](#) [98472](#) [GC 10 TYPE 3 \(JAR\)](#) [660, 50ML](#) [3463, 114G](#) [595, 100ML](#) [603, 50ML](#) [2400,](#)
[50ML](#) [270](#) [983438](#) [7386, 500ML](#) [572, 50ML](#) [8106, 1L](#) [96001](#) [496, 50G](#) [243, 250ML](#) [5400, 50ML](#) [403, 50G](#) [420, 20G](#) [9464, 50ML](#) [638,](#)
[50ML](#) [496, 20G](#) [1487439](#) [3455, 24ML](#) [4062, 20G](#)