



- DIL package
- High sensitivity coil
- Ultra low profile, minimal board area
- Fully sealed for immersion cleaning
- Low magnetic interference
- FCC Part 68 compliant
- Latching versions available
- UL recognised (E73266), CSA Certified (LR46266)



## Specifications


<b>Contact form</b>		2 Form C	
<b>Contact rating</b>	<b>Maximum switching power</b>	30W (resistive)	62.5 VA (resistive)
	<b>Maximum switching voltage</b>	220 VDC	250 VAC
	<b>Maximum switching current</b>	1A	
	<b>Maximum carrying current</b>	2A (@ 20°C)	
<b>Initial contact resistance</b>		50 mΩ TYP.	
<b>Contact material</b>		Silver alloy with gold overlay	
<b>Nominal operating power</b>	<b>Non-latch type and double coil latch type</b>	140 mW (3 to 12 V)	200 mW (24 V)
	<b>Single coil latch type</b>	100 mW (3 to 12V)	150 mW (24 V)
<b>Minimum operating power</b>	<b>Non-latch type and double coil latch type</b>	79 mW (3 to 12 V)	113 mW (24 V)
	<b>Single coil latch type</b>	56 mW (3 to 12 V)	85 mW (24 V)
<b>Operate time (excluding bounce)</b>		Approximately 2 ms without diode	
<b>Release time (excluding bounce)</b>		Approximately 1 ms without diode	
<b>Insulation resistance</b>		1000 MΩ at 500 VDC	
<b>Breakdown voltage</b>	<b>Between open contacts</b>	1000 VAC (for 1 minute)	
	<b>Between adjacent contacts</b>	1000 VAC (for 1 minute)	
	<b>Between coil and contact</b>	1000 VAC (for 1 minute)	
<b>Shock resistance</b>		75 G (misoperating)	
<b>Vibration resistance</b>		20 G (misoperating)	
<b>Ambient temperature</b>		-40 to +85°C	
<b>Coil temperature rise</b>		18° at nominal coil voltage (140 mW)	
<b>Life expectancy</b>	<b>Mechanical</b>	100 x 10 <sup>6</sup> operations	
	<b>Electrical</b>	30 VDC 1 A (resistive), 200 x 10 <sup>3</sup> operations	
<b>Weight</b>		125 VAC 0.5 A (resistive), 100 x 10 <sup>3</sup> operations	
		Approximately 1.5 grams	

## Dimensions mm

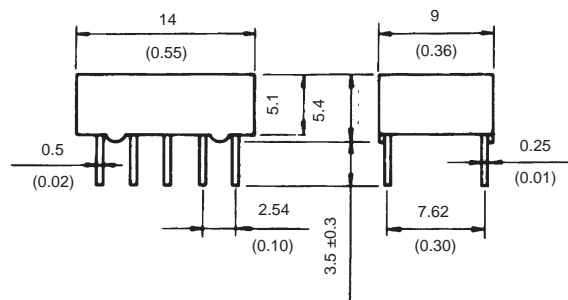


Note: Tolerance  $\pm 0.2$  ( $\pm 0.008$ ) unless otherwise specified

## PCB layout (bottom view)

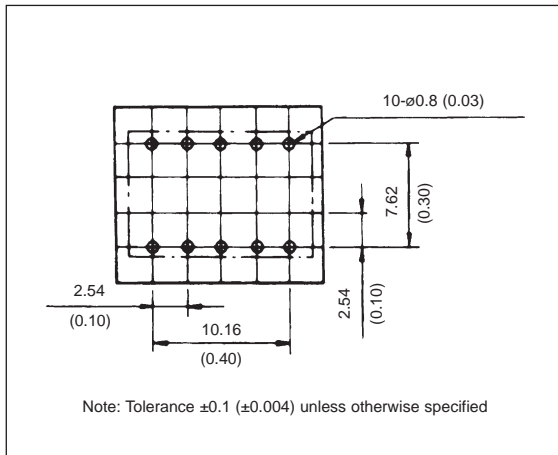

## Pin configuration (bottom view)

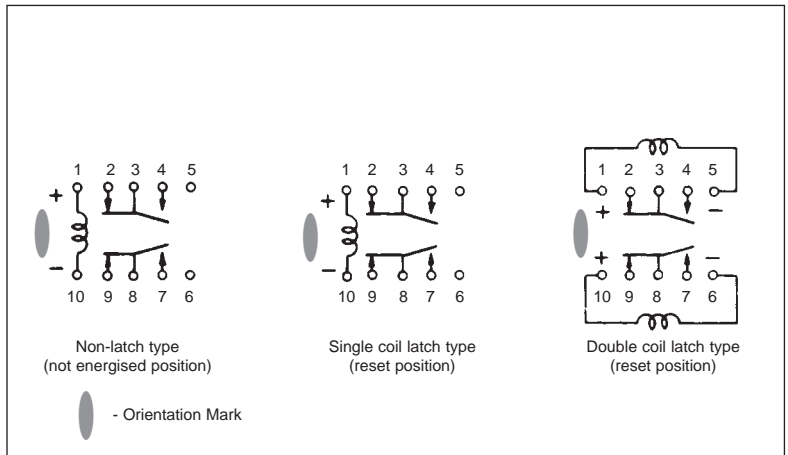

## Part Numbers

### Standard Type

at 25°C

Part Number		Nominal Coil Voltage (VDC) Range 75% - 150%	Coil Resistance ( $\Omega$ ) $\pm 10\%$	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
Standard Type	UL/CSA Recognised Type				
EA2-3	EA2-3NU	3	64.3	2.25	0.3
EA2-4.5	EA2-4.5NU	4.5	145	3.38	0.45
EA2-5	EA2-5NU	5	178	3.75	0.5
EA2-6	EA2-6NU	6	257	4.5	0.6
EA2-9	EA2-9NU	9	579	6.75	0.9
EA2-12	EA2-12NU	12	1028	9	1.2
EA2-24	EA2-24NU	24	2880	18	2.4

### Latching Type (Single Wound Coil)

at 25°C

Part Number		Nominal Coil Voltage (VDC) Range 75% - 150%	Coil Resistance ( $\Omega$ ) $\pm 10\%$	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
Standard Type	UL/CSA Recognised Type				
EA2-3S	EA2-3SNU	3	90	2.25	2.25
EA2-4.5S	EA2-4.5SNU	4.5	202	3.38	3.38
EA2-5S	EA2-5SNU	5	250	3.75	3.75
EA2-6S	EA2-6SNU	6	360	4.5	4.5
EA2-9S	EA2-9SNU	9	810	6.75	6.75
EA2-12S	EA2-12SNU	12	1440	9	9
EA2-24S	EA2-24SNU	24	3840	18	18

### Latching Type (Double Wound Coil)


at 25°C

Part Number		Nominal Coil Voltage (VDC) Range 75% - 150%	Coil Resistance ( $\Omega$ ) $\pm 10\%$		Must Operate Voltage (VDC)	Must Release Voltage (VDC)
Standard Type	UL/CSA Recognised Type					
EA2-3T	EA2-3TNU	3	P	64.3	2.25	-
			S	64.3	-	2.25
EA2-4.5T	EA2-4.5TNU	4.5	P	145	3.38	-
			S	145	-	3.38
EA2-5T	EA2-5TNU	5	P	178	3.75	-
			S	178	-	3.75
EA2-6T	EA2-6TNU	6	P	257	4.5	-
			S	257	-	4.5
EA2-9T	EA2-9TNU	9	P	579	6.75	-
			S	579	-	6.75
EA2-12T	EA2-12TNU	12	P	1028	9	-
			S	1028	-	9
EA2-24T	EA2-24TNU	24	P	2880	18	-
			S	2880	-	18


P - Primary (set) coil S - Secondary (reset) coil

Data


Coil temperature rise

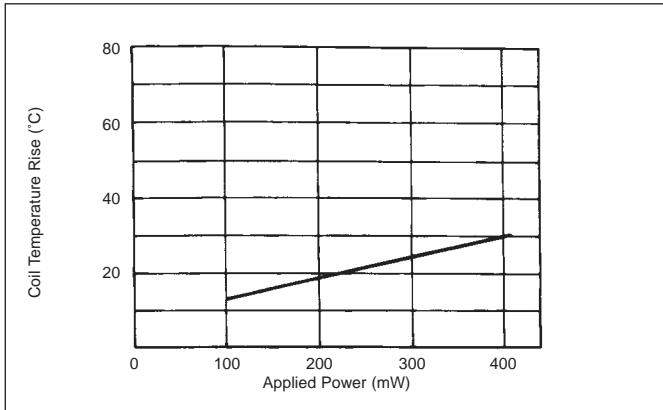


Breakdown voltage

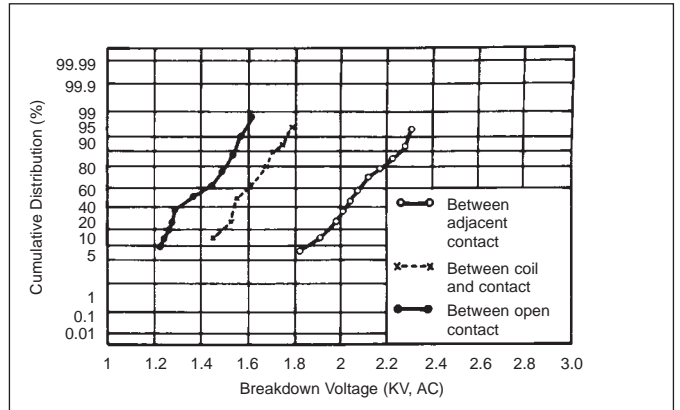


Operate time

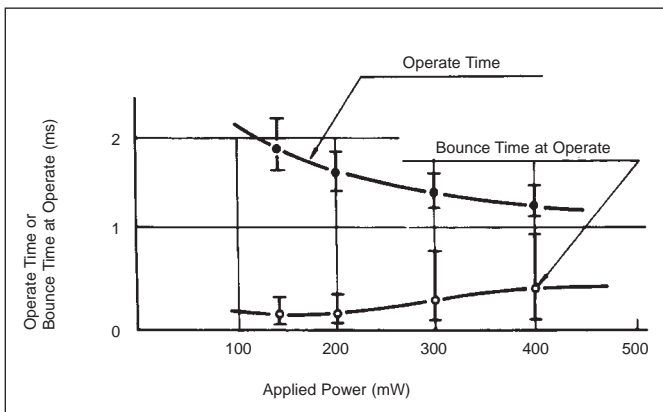


Release time

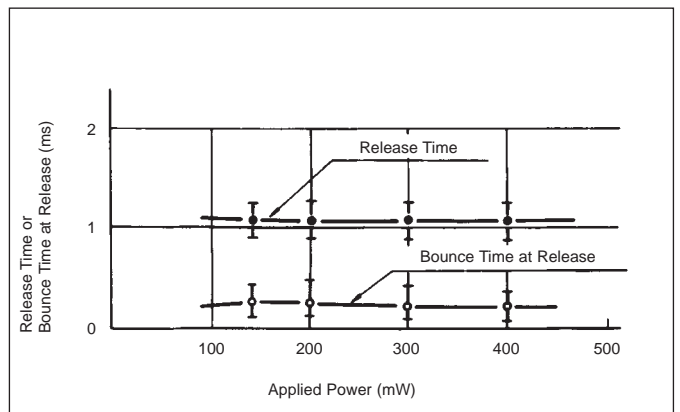


Contact resistance

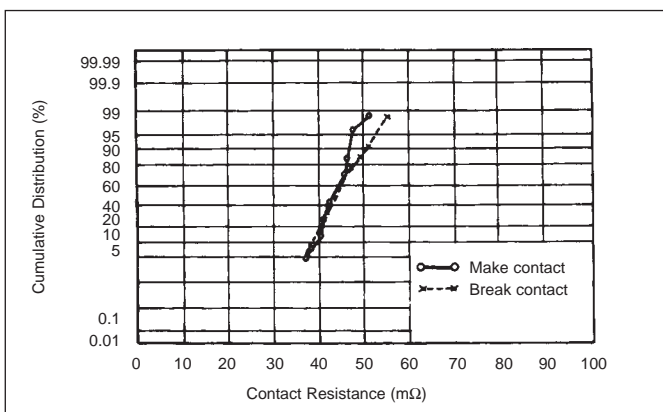


Release time with diode

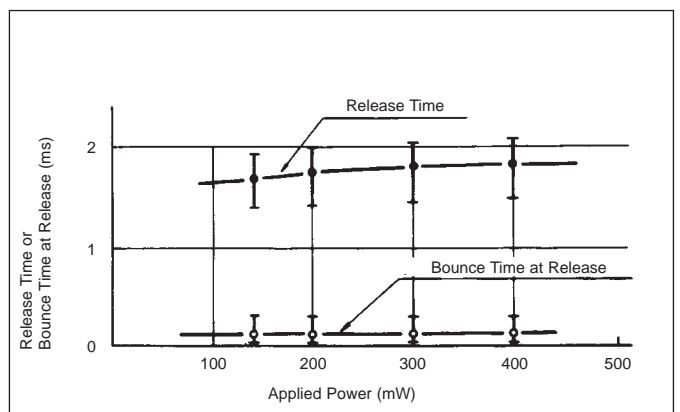

Switching capacity

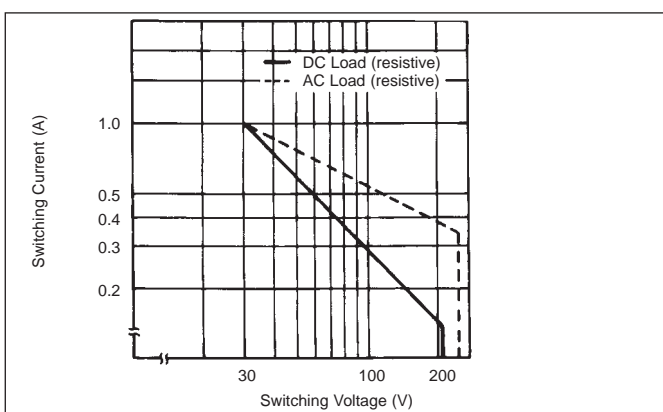


Transfer time

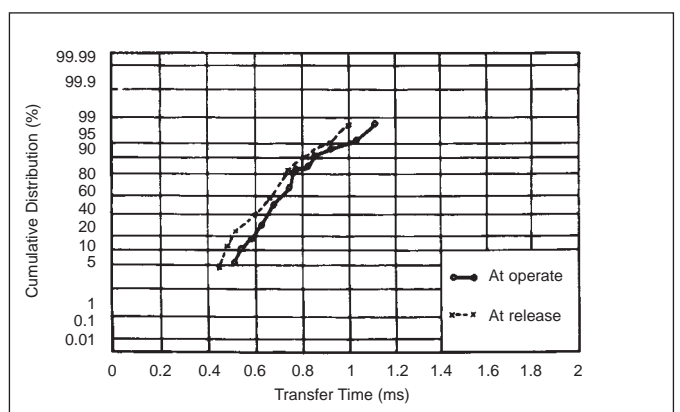


## Data (continued)

### Magnetic interference (EA2 relay)

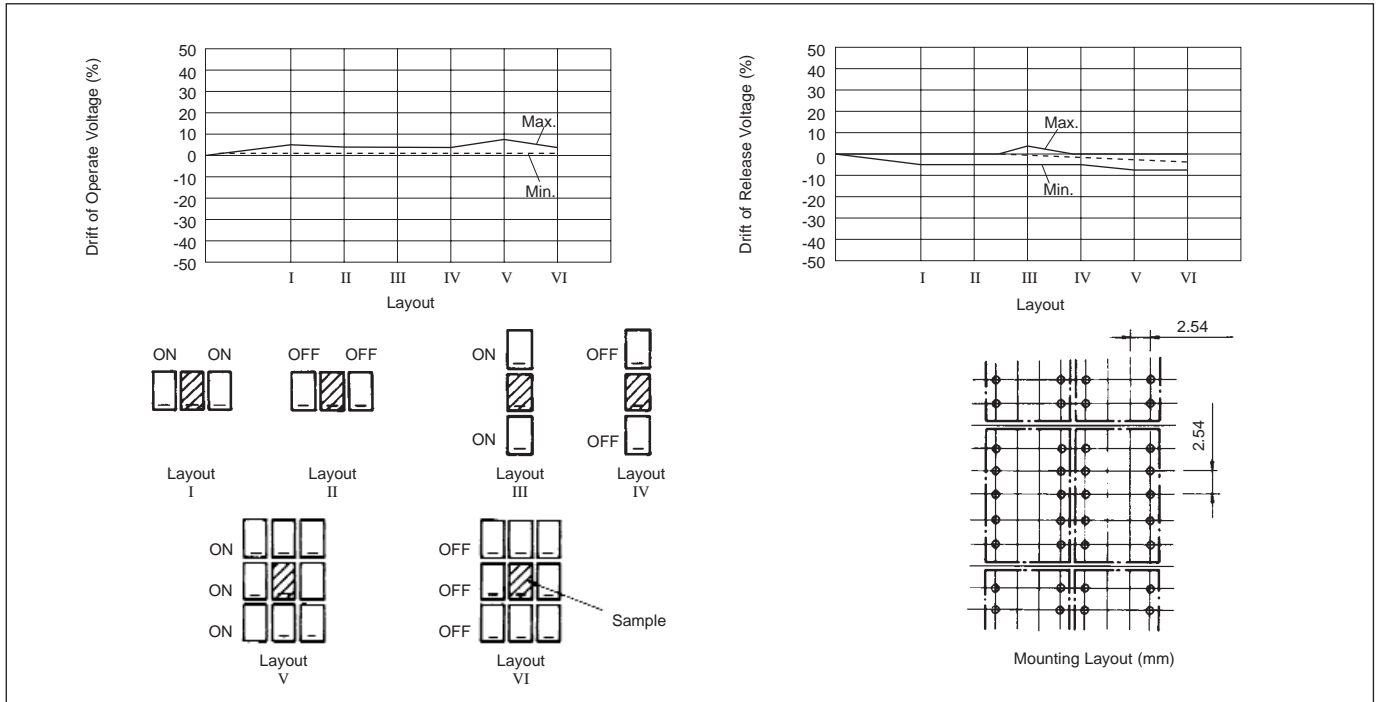


### Mechanical life

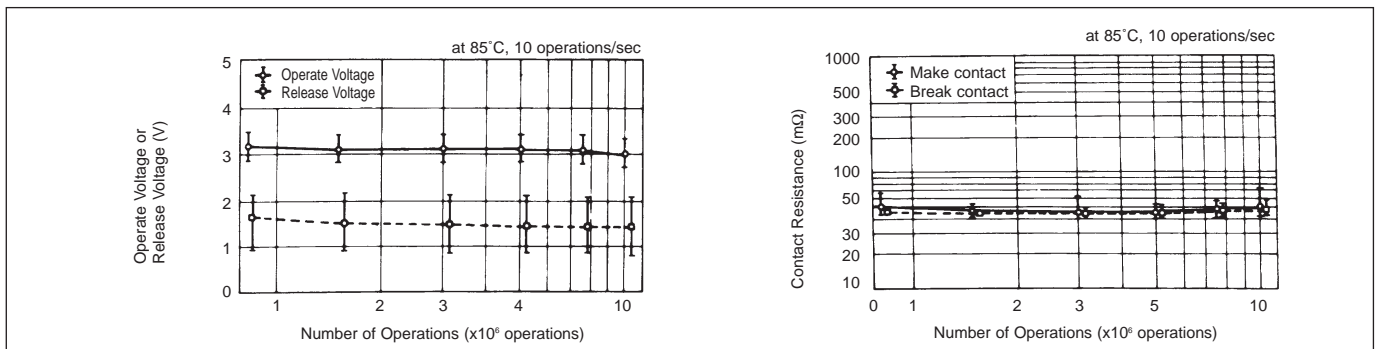

**NOTE**

1. The latch type relay should be initialised at the appointed position (set or reset position) when using, and should be energised or de-energised to the specified polarity to avoid wrong operations.
2. Ultrasonic cleaning is not recommended. Alcohol or chlorosene based solvents are acceptable as cleaning solvents.
3. Excessive stress on the relay cover is detrimental to reliable operation of the relay.

## Options and ordering codes

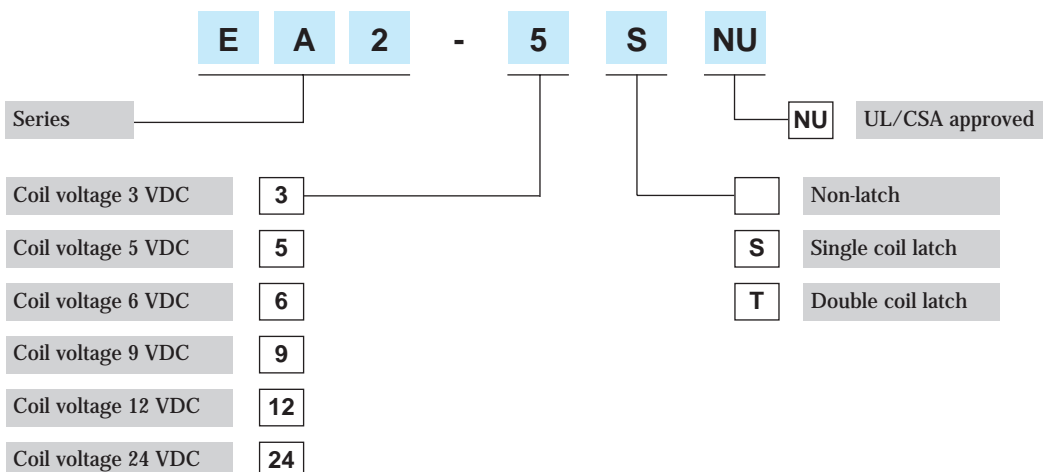

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IMO manufacturer](#):*

Other Similar products are found below :

[MB12-S-1024](#) [MB09-S-10230](#) [CS20A-A2](#) [SRKE-1AT-SL-24VDC](#) [SRF-1C-SL-12VDC](#) [MB09-S-1024](#) [HYE41PN120AC](#) [HYE41PN240AC](#)  
[LDC18RRS](#) [LRC5A01](#) [IV07E-SECP](#) [SFSYE0111](#) [20.3304M/2-E](#) [21.95MHF/3-E](#) [MC24-S-00230](#) [MC18N-S-10230AC](#) [H69-0001](#) [CS20A-](#)  
[U1](#) [CS20A-U4](#) [VFC02](#) [20.95MHF/3-E](#) [MC14N-S-10110AC](#) [E69-0003](#) [DPS-1-060-24](#) [BS3P3REDO](#) [DPS-1-030-24](#) [ISOCON-6](#) [20.1550M/2](#)  
[FA4515-2DN](#) [U1216E4-MC](#) [MA05-S-0040110AC](#) [MA05-S-0040230AC](#) [20.950MF/5-E](#) [20.4101M/4-P](#) [BS3P34REDO](#) [21.95MH/12-E](#)  
[20.920M/5-E](#) [FA4501-2DN](#) [MC10N-S-10230AC](#) [MC10N-S-10110AC](#) [DPS-1-120-24](#) [CS20A-A3](#) [20.95MH/3-E](#) [21.95MV/3](#) [MA05-S-](#)  
[01230AC](#) [SRRHN-2CN-SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [UFSRE0101](#) [MA05-R-S-10230AC](#)