



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE54000 thru NTE54004 Silicon Controlled Rectifier (SCR) 55 Amp, TO220

Description:

The NTE54000 thru NTE54004 are half-wave, unidirectional, gate-controlled silicon controlled rectifiers (SCR) packaged in a TO220 type case featuring glass-passivated junctions to ensure long-term reliability and perimeter stability.

Features:

- High Voltage Capability
- High Surge Capability
- Glass-Passivated Chip


Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$, 60Hz with a resistive load unless otherwise specified)

Repetitive Peak Off-State Voltage, V_{DRM}	
NTE54000	200V
NTE54001	400V
NTE54002	600V
NTE54003	800V
NTE54004	1000V
Repetitive Peak Reverse Voltage, V_{RRM}	
NTE54000	200V
NTE54001	400V
NTE54002	600V
NTE54003	800V
NTE54004	1000V
RMS On-State Current, $I_{T(RMS)}$	
55A	
On-State Current, $I_{T(AV)}$	
35A	
Peak Surge (Non-Repetitive) On-State Current (More than One Full Cycle), I_{TSM}	
50Hz	550A
60Hz	650A
Peak Gate Current (10 μ s Max), I_{GM}	
4A	
Peak Gate-Power Dissipation (10 μ s Max), P_{GM}	
40W	
Average Gate Power Dissipation, $P_{G(AV)}$	
800mW	
Peak On-State Voltage (at Max. Rated RMS Current, $T_C = +25^\circ\text{C}$), V_{TM}	
1.8V	
RMS Surge (Non-Repetitive) On-State Current for Fusing (8.3ms), I^2t	
1750A ² sec	
Lead Temperature (During soldering, 1/16" from case, 10sec max), T_L	
+230°C	
Operating Temperature Range, T_{oper}	
-40° to +125°C	
Storage Temperature Range, T_{stg}	
-40° to +150°C	
Typical Thermal Resistance, Junction-to-Case, R_{thJC}	
0.5°C/W	

Electrical Characteristics:

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Peak Off-State Current NTE54000, NTE54001, NTE54002	I_{DRM} , I_{RRM}	V_{DRM} & V_{RRM} = Max Rating, $T_C = +100^\circ\text{C}$	-	-	1.0	mA
NTE54003			-	-	1.5	mA
NTE54004			-	-	5.0	mA
DC Holding Current	I_H	Initial On-State Current = 400mA, Gate Open	-	-	60	mA
DC Gate Trigger Current	I_{GT}	$V_D = 12\text{V}$, $R_L = 30\Omega$	5	-	40	mA
DC Gate Trigger Voltage	V_{GT}	$V_D = 12\text{V}$, $R_L = 30\Omega$, $T_C = +25^\circ\text{C}$, Note 1	-	-	1.5	V
Gate Controlled Turn-On Time	t_{gt}	$I_{GT} = 150\text{mA}$, Min. Width = $15\mu\text{s}$, Rise Time $\leq 0.1\mu\text{s}$	-	-	2.5	μs
Circuit Commutated Turn-Off Time	t_q	$I_T = 2\text{A}$, $I_{GT} = 200\text{mA}$ at Turn-On, Pulse Duration = $50\mu\text{s}$, $dv/dt = 20\text{V}/\mu\text{s}$, $di/dt = -30\text{A}/\mu\text{s}$	-	-	35	μs
Critical Rate of Rise of Off-State Voltage	dv/dt	$T_C = +100^\circ\text{C}$	500	-	-	$\text{V}/\mu\text{s}$
Max Rate of Rise of On-State Current	di/dt	$I_{GT} = 150\text{mA}$, Rise Time $\leq 0.1\mu\text{s}$	-	-	175	$\text{A}/\mu\text{s}$

Note 1. Minimum non-trigger V_{GT} at $+125^\circ\text{C}$ is 0.2V.

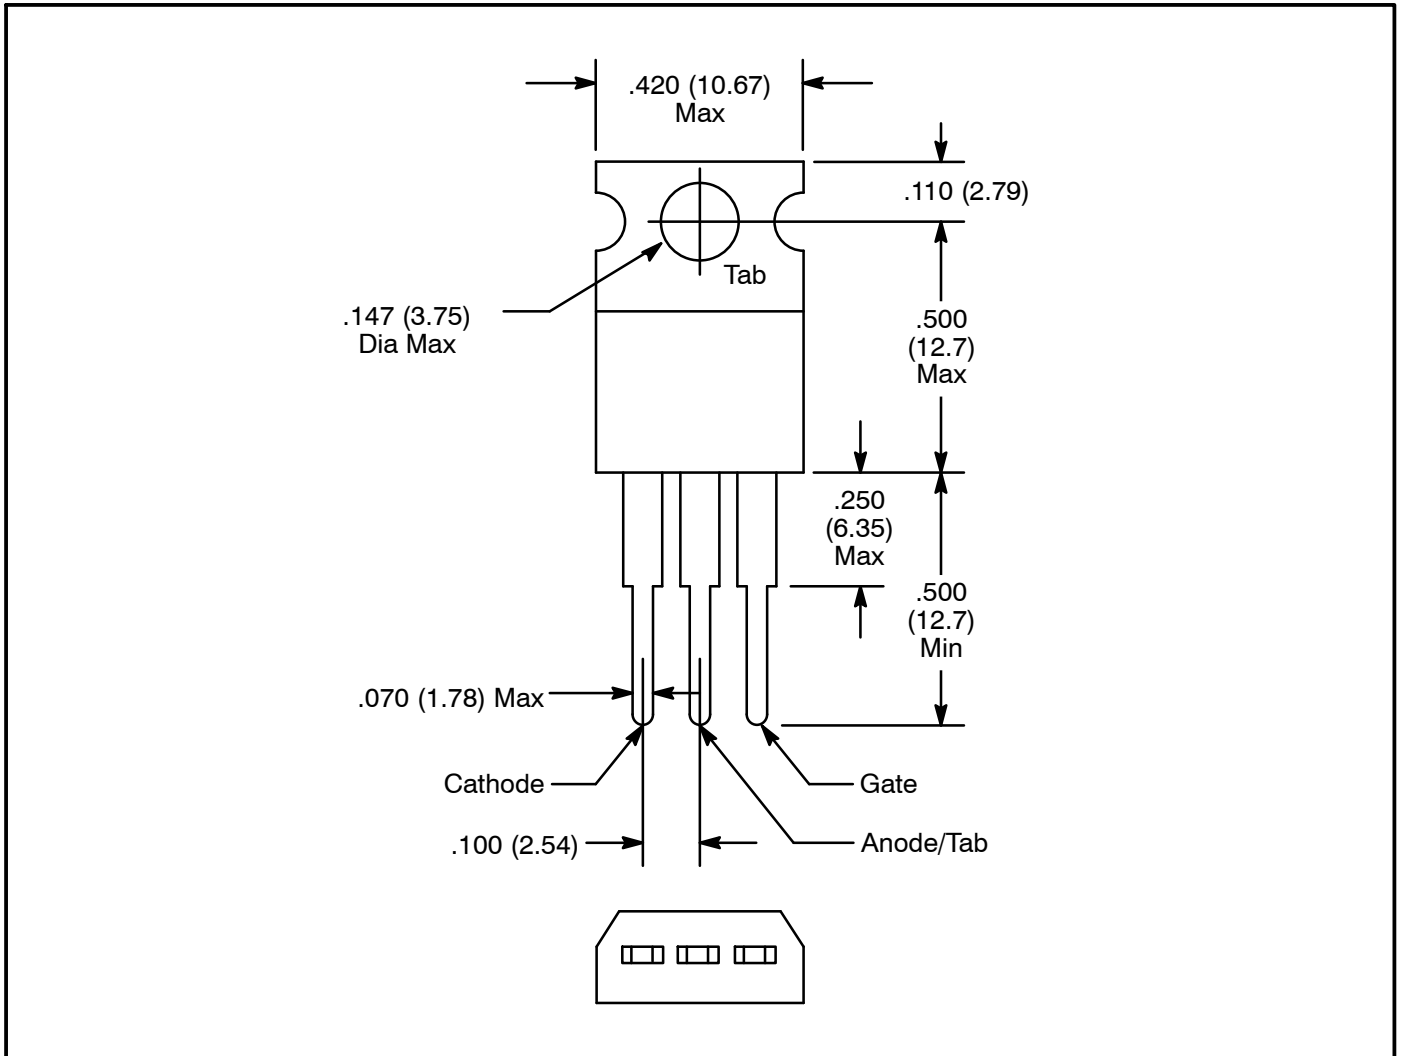

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SCRs category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[NTE5428](#) [NTE5448](#) [NTE5457](#) [NTE5511](#) [T1500N16TOF VT](#) [T720N18TOF](#) [T880N14TOF](#) [T880N16TOF](#) [TN1205H-6G](#) [TN1215-800B-TR](#)
[TS110-7UF](#) [TT104N12KOF-A](#) [TT104N12KOF-K](#) [TT162N16KOF-A](#) [TT162N16KOF-K](#) [TT330N16AOF](#) [VS-111RKI120PBF](#) [VS-16RIA100](#)
[VS-22RIA20](#) [VS-2N5206](#) [VS-2N685](#) [VS-40TPS08A-M3](#) [VS-50RIA10](#) [057219R](#) [T1190N16TOF VT](#) [T1220N22TOF VT](#) [T201N70TOH](#)
[T830N14TOF](#) [T830N18TOF](#) [TD92N16KOF-A](#) [TT250N12KOF-K](#) [VS-ST180S12P0V](#) [VS-25RIA40](#) [VS-16RIA120](#) [VS-30TPS08PBF](#)
[TN1215-800G-TR](#) [NTE5427](#) [NTE5442](#) [X0405NF 1AA2](#) [VS-ST300S20P0PBF](#) [T2160N28TOF VT](#) [TT251N16KOF-K](#) [VS-22RIA100](#) [VS-](#)
[16RIA40](#) [CR02AM-8#F00](#) [VS-ST110S12P0VPBF](#) [TD250N16KOF-A](#) [GA301A](#) [VS-ST110S16P0](#) [VS-10RIA10](#)