


■Features

- Single chip
- Suitable for all SMT assembly methods.
- Sorting for I_v and V_f @ 20mA of I_f
- Compact package outline
(LxWxT) of 4.0mm x 0.8mm x 1.4mm
- Compatible to IR reflow soldering.

■Applications

- Mobile communications equipment (Ipad, Iphone, etc.)
- Digital products (MP3,MP4, etc.)

■Outline Dimension

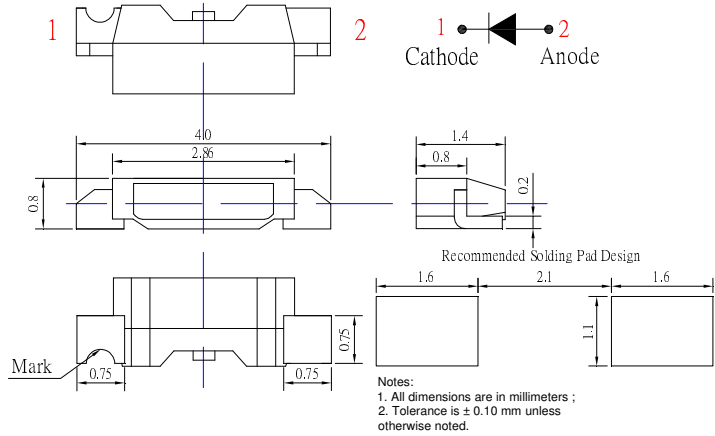


■Absolute Maximum Rating

($T_a=25^\circ\text{C}$)

Item	Symbol	Value		Unit
		W/M/K/PG//B	YG/Y/R	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current*	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	102	72	mW
Operating Temperature	T_{opr}	-30 ~ +85		$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ +100		$^\circ\text{C}$
Lead Soldering Temperature	T_{sol}	260 $^\circ\text{C}$ /10sec		-

*Pulse width Max.10ms Duty ratio max 1/10

■Directivity

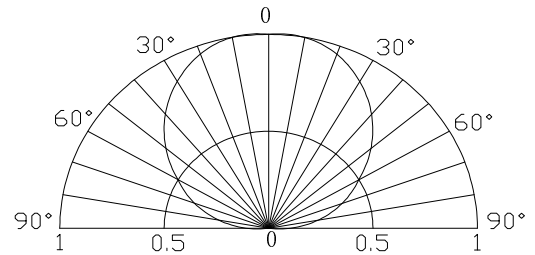

■Electrical -Optical Characteristics

($T_a=25^\circ\text{C}$)

Part Number	Color			V_F (V)			I_R (μA)	I_v (mcd)			CCT(K)\Wd(nm)*			$2\theta_{1/2}$ (deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				$I_F=20\text{mA}$			$V_R=5\text{V}$	$I_F=20\text{mA}$						
OSW54008C1F	Cool White	W		2.8	3.0	3.4	10	1400	2000	-	CCT:8000~18000K			120
OSM64008C1F	Warm White	M	■	2.8	3.0	3.4	10	1400	2000	-	CCT:3000~3800K			120
OSK54008C1F	Pink	K		2.8	3.0	3.4	10	100	200	-	typ.:X=0.38,Y=0.16			120
OSB54008C1F	Blue	B	■	2.8	3.0	3.4	10	200	400	-	460	465	470	120
OSG84008C1F	Yellow Green	YG	■	1.8	2.0	2.4	10	70	120	-	565	570	575	120
OSG54008C1F	Pure Green	PG	■	2.8	3.0	3.4	10	800	1500	-	515	520	525	120
OSY54008C1F	Yellow	Y	■	1.8	2.0	2.4	10	200	400	-	585	590	595	120
OSR54008C1F	Red	R	■	1.8	2.0	2.4	10	200	400	-	620	625	630	120


*1 Tolerance of measurements of chromaticity coordinate is $\pm 10\%$

*2 Tolerance of measurements of dominant wavelength is $\pm 1\text{nm}$

*3 Tolerance of measurements of luminous intensity is $\pm 15\%$

*4 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$

LED & Application Technologies



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard LEDs - SMD category](#):

Click to view products by [Optosupply manufacturer](#):

Other Similar products are found below :

[LTST-N683GBEW](#) [597-3006-607F](#) [LTW-170ZDC](#) [597-3403-607F](#) [LTW-K140SZR40](#) [LTW-M140ZVS](#) [598-8110-100F](#) [598-8170-100F](#)
[598-8610-202F](#) [7012X7](#) [AAAF5060QBFSEEZGS](#) [APT1608QGW](#) [ASMT-YTC7-0AA02](#) [EASV1803BA0](#) [HT-F104TW-5860](#) [KA-3528YT](#)
[SML310BATT86](#) [SML-512VWT86A](#) [SML-LX0606SISUGC/A](#) [SML-LXL1307SRC-TR](#) [SML-LXR851SIUPGUBC](#) [LT1ED53A](#) [17-21/G6C-](#)
[FM1N2B/3T](#) [FAT801-S](#) [AM27ZGC03](#) [APB3025SGNC](#) [APFA3010SURKCGKQBDC](#) [APHK1608VGCA](#) [APT2012QGW](#) [CLMVC-FKA-](#)
[CA1E1L81BB7C3C3](#) [CLX6D-FKB-CN1R1H1BB7D3D3](#) [CLYBA-FKA-CFHHL9BBB7A363](#) [CMD11504UR](#) [LTST-C250KGKT](#) [LTW-](#)
[010DCG](#) [LTW-21TS5](#) [LTW-220DS5](#) [LTW-K140SZR30](#) [ASMB-BTE1-0B332](#) [ASMT-CW00](#) [MP-1616-2103-50-80](#) [BR1102W-TR-LF](#)
[HSMY-C177](#) [HT-121UYG-4739](#) [JANTXM19500/521-02](#) [UYGT801-S](#) [KVH1C100MF6R](#) [42-21SYGC/S530-E1/TR8](#) [YGFR411-H](#) [597-](#)
[2311-402F](#)