


■ Features

- High Luminous LEDs
- 3mm Round Standard Directivity
- Superior Weather-resistance
- UV Resistant Epoxy

■ Applications

- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting/ Indication Lighting

■ Outline Dimension

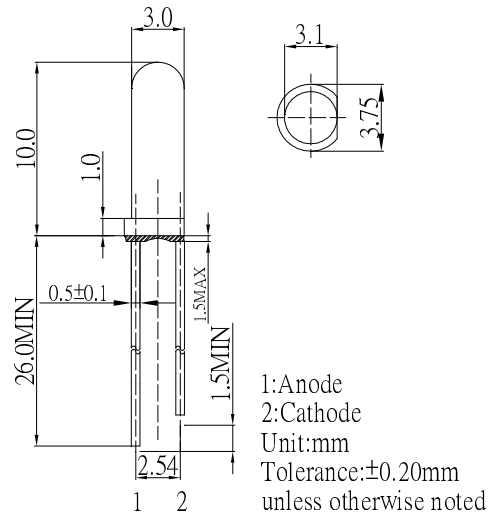


■ Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/K/BL/PG	Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current*	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	102	78	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T _{sol}	260 °C/5sec		-

*Pulse width Max.10ms Duty ratio max 1/10

■ Directivity

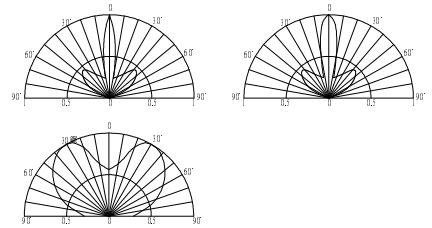

■ Electrical -Optical Characteristics

(Ta=25°C)











Part Number	Color		V _F (V)			I _R (μA)	I _v (mcd)			CCT(K)*			201/2(deg)
			Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
			I _F =20mA			V _R =5V		I _F =20mA					
OSW5DK6C21A	Cool White	W	2.7	2.9	3.4	10	4200	5800	-	8500-18000K(X:0.27,Y:0.28)			20
OSM5DK6C21A	Warm White	M	2.7	2.9	3.4	10	4200	5800	-	2700-3300K(X:0.44,Y:0.41)			20
OSK5DK6C21A	Pink	K	2.7	2.9	3.4	10	1120	1560	-	X:0.45,Y:0.17			20
OSW5DK6CF2A	Cool White	W	2.7	2.9	3.4	10	750	1120	-	8500-18000K(X:0.27,Y:0.28)			150
OSM5DK6CF2A	Warm White	M	2.7	2.9	3.4	10	750	1120	-	2700-3300K(X:0.44,Y:0.41)			150
OSK5DK6CF2A	Pink	K	2.7	2.9	3.4	10	220	330	-	X:0.45,Y:0.17			150

*1 Tolerance of measurements of chromaticity coordinate is ±10%

*2 Tolerance of measurements of luminous intensity is ±15%

*3 Tolerance of measurements of forward voltage is ±0.1V

■ **Electrical -Optical Characteristics** (Ta=25°C)

Part Number	Color			V _F (V)			I _R (μA)	I _v (mcd)			Wd(nm)*			2θ1/2(deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			V _R =5V	I _F =20mA						
OSB5SA6C21A	Blue	BL		2.7	3.0	3.4	10	1560	2180	-	465	470	475	20
OSG5DA6C21A	Pure Green	PG		2.7	3.0	3.4	10	5800	7000	-	520	525	530	20
OSY5RU6C11A	Yellow	Y		1.8	2.1	2.6	10	750	900	-	585	590	595	15
OSO5JA6C11A	Orange	O		1.8	2.1	2.6	10	500	750	-	600	605	610	15
OSR5RU6C11A	Red	R		1.8	2.1	2.6	10	750	900	-	620	625	630	15
OSB5SA6CF2A	Blue	BL		2.7	3.0	3.4	10	150	220	-	465	470	475	150
OSG5DA6CF2A	Pure Green	PG		2.7	3.0	3.4	10	500	750	-	520	525	530	150
OSY5RU6CF2A	Yellow	Y		1.8	2.1	2.6	10	100	150	-	585	590	595	150
OSO5JA6CF2A	Orange	O		1.8	2.1	2.6	10	68	100	-	600	605	610	150
OSR5RU6CF2A	Red	R		1.8	2.1	2.6	10	100	150	-	620	625	630	150

*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of luminous intensity is ±15%

*3 Tolerance of measurements of forward voltage is ±0.1V

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard LEDs - Through Hole category:](#)

Click to view products by [Optosupply manufacturer:](#)

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-1BEDJ](#) [LTL-2231AT](#) [LTL2V3EU3KS](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-433P](#) [LTL-5234](#) [LTL87HTBK](#)
[LTW-87HD4B](#) [HLMP-AG64-X10ZZ](#) [HLMP-EG1A-Z10DV](#) [HLMP-EL3B-WXKDD](#) [HLMP-HB74-UVBDD](#) [HLMP-HG65-VY0DD](#) [HLMP-HM74-34CDD](#) [HLMP-HM75-34CDD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [C4SMA-BGF-CQ34Q3C2](#) [L53GC13](#) [L53SRC](#) [264-7SURTS530-A3](#) [L-934MD/2ID](#) [L-934MD/2YD](#) [L-C150JRCT](#) [S4SMS-BJF-CQ42QGF2](#) [S4SMS-GJF-CW12QMF2](#) [LD CQDP-1U3U-W5-1-K](#)
[LNX998CKBDA](#) [LO566UHR3-70G-A3](#) [SLA560WBD2PT3](#) [LP379PPG1C0G0300001](#) [SLR-322MCT32](#) [SLR-342MC3F](#) [SLR343BC7TT32](#)
[SLR343BCTT32](#) [SLX-LX3044GD](#) [SLX-LX3044HC](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSL-LX20483ID](#) [SSL-LX3034YD](#)
[SSL-LX5093LGT-11](#) [SSL-LX5093PGC](#) [SSL-LX5093SRC39240](#) [SSL-LX5093SYT](#) [SSL-LX509E3SIT](#)