

**SOLID PC 3828 13 T**



Sample photo

**Order symbol:** PC 3828 13 T  
**Product nbr:** 5330063  
**Description:** Enclosure, PC  
**Remarks:** Transparent cover

**EAN:** 6418074005557  
**EI. number:**  
 Finland: 3423817  
 Electric No. Italy: 7402050  
 Electric No. Sweden: 2539452

Including: Base with screws for mounting plate, cover with PUR gasket and polyamide cover screws.


**Dimensions: Length Width Height Accessories:**

| Dimensions:             | Length | Width | Height | Accessories: |                         |
|-------------------------|--------|-------|--------|--------------|-------------------------|
| mm:                     | 378    | 278   | 130    | EKPXT        | Mounting plate isolated |
| inch:                   | 14.9   | 10.9  | 5.1    | EKV 22       | DIN-35 Mounting rail    |
| <b>Materials:</b>       |        |       |        | EKV 32       | DIN-35 Mounting rail    |
| Material: Polycarbonate |        |       |        | EKPZR        | Extension frame         |

|                        |                      |  |  |
|------------------------|----------------------|--|--|
| <b>Materials:</b>      |                      | <b>Rating:</b>                           |  |
| Material:              | Polycarbonate        | Ingress Protection (EN 60529): IP66/IP67 |  |
| Base colour:           | RAL 7035 -light grey | Impact Resistance (EN 62262): IK08/IK09  |  |
| Cover screws material: | Polyamide            | Electrical insulation: Totally insulated |  |
| Cover colour:          | Clear transparent    | Halogen free (DIN/VDE 0472, Part 815): 1 |  |
| Cover screws colour:   | Grey                 | UV resistance: UL 508                    |  |
| Gasket material:       | Polyurethane         | Flammability Rating: UL 746C 5"          |  |

|                              |                |   |  |
|------------------------------|----------------|---|--|
| <b>Temperatures:</b>         |                | Glow Wire Test (IEC 695-2-1) °C: 960        |  |
| Temperature °C (short term): | -40 ... 120 °C | NEMA Class: NEMA 1, 3, 3S, 4, 4X, 6, 6P, 12 |  |
| Temperature °C (continuous): | -40 ... 80 °C  |   |  |
| Temperature °F (short term): | -40 ... 250 °F |   |  |
| Temperature °F (continuous): | -40 ... 175 °F |   |  |

|                     |                |                      |  |
|---------------------|----------------|----------------------|--|
| <b>Accessories:</b> |                | <b>Certificates:</b> |  |
| EKPVT               | Mounting plate | SGS Fimko            |  |
|                     |                | Gost R               |  |

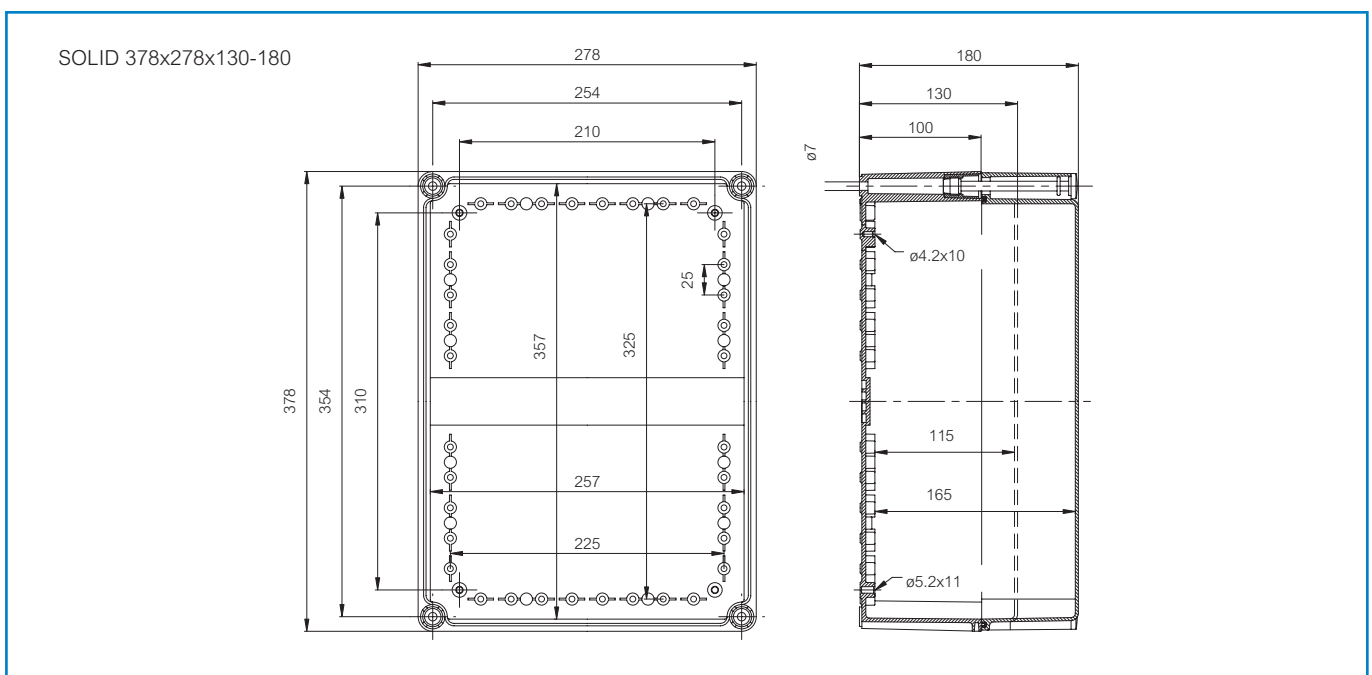

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Enclosures, Boxes, & Cases](#) category:*

*Click to view products by [Fibox](#) manufacturer:*

Other Similar products are found below :

[CR-425 PAINTED](#) [585-R-WH-PK](#) [M-10-PLATED](#) [60221-01](#) [60566-01-000](#) [HPL-9VB BATT DOOR](#) [M-16-LID-PLATED](#) [M18-PLTD](#) [M-21-LID-PLATED](#) [M-21-PLATED](#) [M-23-PLATED](#) [CU-281-MB](#) [6711GSKT](#) [71884-29-028](#) [LH45-100 Black](#) [7200B](#) [72868-510-000](#) [CNS-0000 Black](#) [72883-510-000](#) [CNS-0101 Black](#) [72906-510-000](#) [CNS-0407 Black](#) [73091-510-000](#) [CNM-0000-BLACK Kit](#) [73092-510-000](#) [CNM-0101 Black](#) [73108-510-000](#) [CNL-0303 Black](#) [73395-510-039](#) [CNS-0006 Bone](#) [74257-510-000](#) [CNL-0004](#) [MDC-1183-PLAIN-ALUM](#) [MDC-1183-PTD](#) [MDC-13104-PLAIN-ALUM](#) [MDC-211 - PAINTED IVORY/BEIGE](#) [MDC-321-PTD](#) [MDC-432-PLAIN-ALUM](#) [MDC-973-PTD](#) [76](#) [77153-01-028](#) [FLX6030](#) [83535-01-508](#) [PS-11296-G](#) [PS-11298-B](#) [116-508](#) [120-407](#) [120-412](#) [120-909](#) [120-455](#) [R272-100-000](#) [120-910](#) [R501-001-010](#) [R508-080-000](#) [R508-160-000](#) [R530-120-000](#) [R530-122-000](#) [R530-200-000](#) [R531-160-000](#) [R531-200-000](#) [R582-080-100](#)