


# PCI-1602 PCI-1604 PCI-1610 PCI-1612

2-port RS-232/422/485 PCI Communication Card

2-port RS-232 PCI Communication Card

4-port RS-232 PCI Communication Card

4-port RS-232/422/485 PCI Communication Card

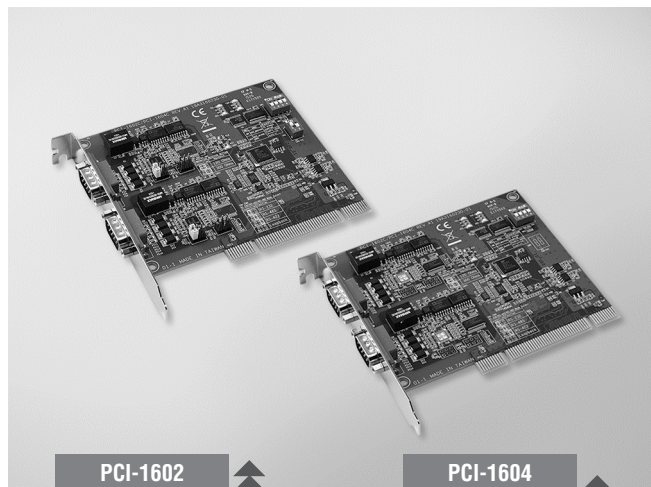

PCI-1602

PCI-1604



## Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 2 x RS-232 or RS-232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V352 UART with 256-byte FIFOs

## Specifications

### General

- **Bus Type** Universal PCI v2.2
- **Certification** CE, FCC class A
- **Connectors** 2x male DB9
- **Dimensions (L x W)** 119.91 x 106.67 mm (4.72" x 4.2")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

### Communications

- **Comm. Controller** XR17V352
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

### Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

### Environment


- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1602B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1602C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V <sub>DC</sub>
PCI-1604C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V <sub>DC</sub>

## Ordering Information

- **PCI-1602B-CE** 2-port RS-232/422/485 PCI Comm. Card w/Surge
- **PCI-1602C-AE** 2-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation
- **PCI-1604C-AE** 2-port RS-232 PCI Comm. Card w/Surge & Isolation

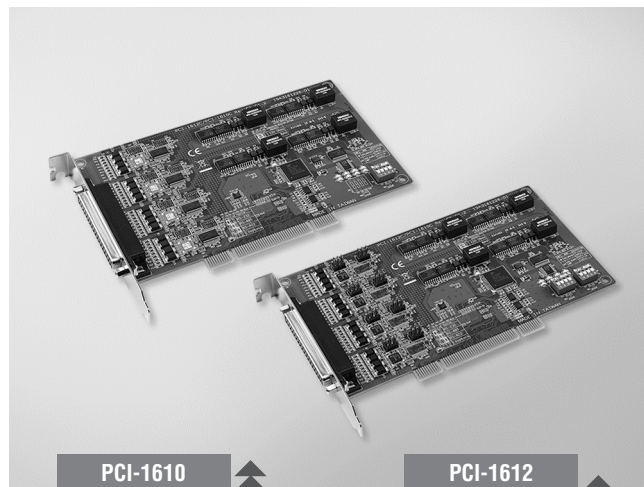

PCI-1610

PCI-1612



## Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 4 x RS-232 or RS-232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V354 UART with 256-byte FIFOs

## Specifications

### General

- **Bus Type** Universal PCI v2.2
- **Certification** CE, FCC class A
- **Connectors** 1x Female DB37
- **Dimensions (L x W)** 174.65 x 106.67 mm (6.88" x 4.2")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

### Communications

- **Comm. Controller** XR17V354
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

### Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

### Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

### Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1610B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1610C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V <sub>DC</sub>
PCI-1612B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1612C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V <sub>DC</sub>

## Ordering Information

- **PCI-1610B-DE** 4-port RS-232 PCI Comm. Card w/Surge
- **PCI-1610C-CE** 4-port RS-232 PCI Comm. Card w/ Surge & Isolation Protection
- **PCI-1612B-DE** 4-port RS-232/422/485 PCI Comm. Card w/Surge
- **PCI-1612C-CE** 4-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation

Note: this series includes cable OPT4A.

### Accessories

- **OPT4A-AE** DB37 x1 to DB9 x4 Cable, 30cm

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controllers](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)  
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)  
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)  
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)  
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)  
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)