


PCI-1711U/UL

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card

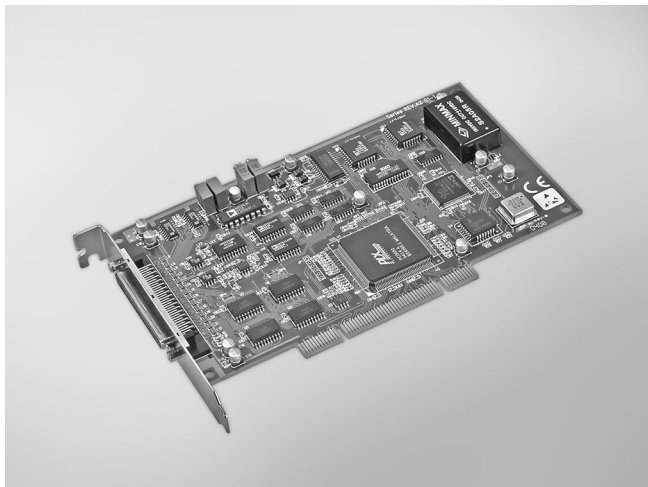

FCC CE RoHS

Features

- 16-ch single-ended analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (1,024 samples)
- Two 12-bit analog output channels (PCI-1711U only)
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter

Specifications

Analog Input

- **Channels** 16 single-ended
- **Resolution** 12 bits
- **Max. Sampling Rate** 100 kS/s

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels are used, the sampling rate is $100k/4 = 25$ kS/s per channel.

- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 2 M Ω /5 pF
- **Sampling Modes** Software, onboard programmable pacer, or external
- **Input Range (V, software programmable) & Absolute Accuracy**

Bipolar	± 10	± 5	± 2.5	± 1.25	± 0.625
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

* ± 1 LSB is added as the derivative for absolute accuracy

Analog Output (PCI-1711U only)

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (Software programmable)

Internal Reference	Unipolar	0 ~ 5 V, 0 ~ 10 V
External Reference		0 ~ +x V @ -x V (-10 \leq x \leq 10)

- **Slew Rate** 11 V/ μ s
- **Driving Capability** 3 mA
- **Output Impedance** 0.81 Ω
- **Operation Mode** Static update
- **Accuracy** INLE: ± 0.5 LSB
DNLE: ± 0.5 LSB

Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.

Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V
Logic 1: 2.0 V
- **Output Capability** Sink: 8.0 mA @ 0.8 V
Source: 0.4 mA @ 2.0 V

Pacer/Counter

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 10 MHz

General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption**
PCI-1711U
Typical: 5 V @ 850 mA
Max.: 5 V @ 1.0 A
PCI-1711UL
Typical: 5 V @ 700 mA
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

Ordering Information

- **PCI-1711U** Entry-level 100 kS/s, 12-bit Multifunction Card
- **PCI-1711UL** Entry-level 100 kS/s, 12-bit Multi. Card w/o A/O

Accessories

- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)