


# PCI-1714U PCI-1714UL

**30 MS/s, 12-bit, Simultaneous  
4-ch Analog Input Universal PCI Card**

**10 MS/s, 12-bit, Simultaneous  
4-ch Analog Input Universal PCI Card**

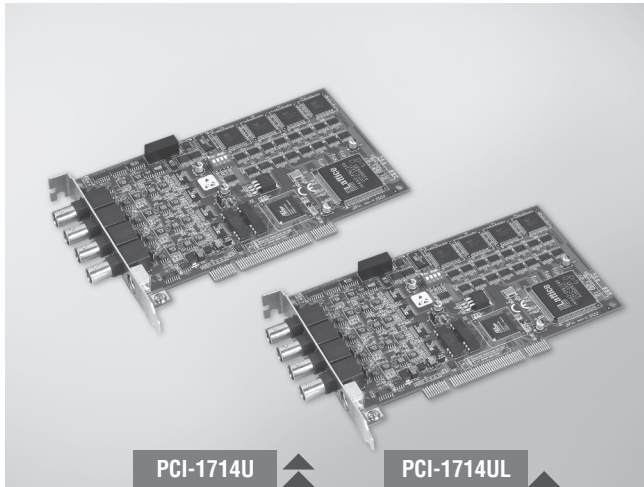

FCC CE RoHS

## Features

- 4 single-ended analog input channels
- 12-bit A/D converter, with up to 30 MHz sampling rate
- Programmable gain
- Onboard FIFO memory (PCI-1714U: 32,768 samples each channel; PCI-1714UL: 8,192 samples, each channel)
- 4 A/D converters simultaneously sampling
- Multiple A/D triggering modes
- Programmable pacer/counter
- BoardID™ switch
- Universal PCI Bus (supports 3.3 V or 5 V PCI bus signals)

## Introduction

PCI-1714U and PCI-1714UL are advanced high-performance data acquisition cards based on the PCI bus. With a large FIFO of 32,768 for each channel, the maximum sampling rate of PCI-1714U can get up to 30 MS/s, on each channel, with an emphasis on continuous, non-stop, high-speed, streaming data of samples to host memory. The low-cost PCI-1714UL offers 10 MS/s on each channel at a stable rate, and has also been equipped with a universal PCI interface.

## Specifications

### Analog Input

- Channels** 4 single-ended
- Resolution** 12 bits
- Max. Sampling Rate** PCI-1714U: 30 MS/s per channel  
PCI-1714UL: 10 MS/s per channel
- FIFO Size** PCI-1714U: 32,768 samples each channel  
PCI-1714UL: 8,192 samples each channel
- Overvoltage Protection** 30 Vp-p
- Input Impedance** 50 Ω/1 MΩ/Hi Z jumper selectable/100 pF
- Sampling Modes** Software polling, pacer
- Trigger Modes** Post-trigger, pre-trigger, delay-trigger, about-trigger
- Input Range (V, software programmable) & Absolute Accuracy**

Bipolar	±5	±2.5	±1	±0.5
Absolute Accuracy (% of FSR)*	0.1	0.2	0.2	0.4

\* ±1 LSB is added as the derivative for absolute accuracy

### General

- Bus Type** Universal PCI V2.2
- I/O Connectors** 4 x BNC connector (for AI)  
1 x PS/2 connector (for Ext. clock and trigger)
- Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- Power Consumption** Typical: 5 V @ 850 mA ; 12 V @ 600 mA  
Max.: 5 V @ 1 A; 12 V @ 700m A
- Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)
- Storage Humidity** 5 ~ 95% RH, non-condensing


## Ordering Information

- PCI-1714U** 30 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card
- PCI-1714UL** 10 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card


### Accessories

- ADAM-3909** DB9 DIN-rail Wiring Board
- PCL-1010B-1E** BNC to BNC Wiring Cable, 1 m
- PCL-10901-1E** DB9 to PS/2 Cable, 1 m
- PCL-10901-3E** DB9 to PS/2 Cable, 3 m

## Pin Assignments



Onboard PS/2 Connector



PS/2 To DB9 Cable Connector

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controllers](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)  
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)  
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)  
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)  
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)  
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)