

# PCI-1730U


# PCI-1733

# PCI-1734

## 32-ch Isolated Digital I/O Universal PCI Card

## 32-ch Isolated Digital Input PCI Card

## 32-ch Isolated Digital Output PCI Card

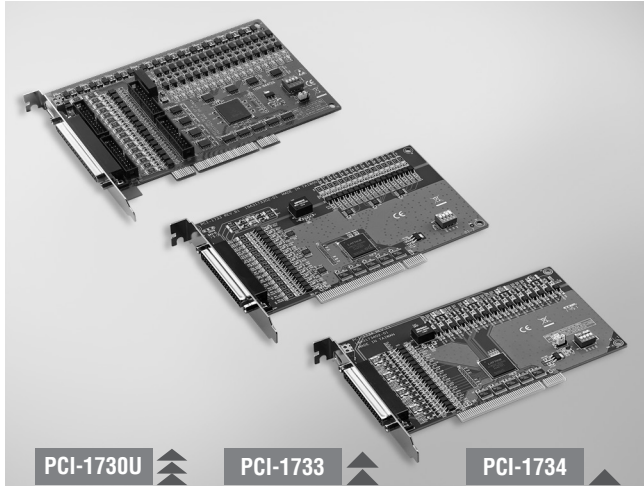

FCC CE RoHS

### Features

- ISA-compatible with PCL-730/733/734
- 32-ch isolated DI/O (16-ch digital input, 16-ch digital output) (PCI-1730U only)
- 32-ch TTL DI/O (16-ch digital input, 16-ch digital output) (PCI-1730U only)
- High output driving capacity
- Interrupt handling capability
- 2 x 20-pin connectors for isolated DI/O channels (PCI-1730U only)
- 2 x 20-pin connectors for TTL DI/O channels (PCI-1730U only)
- D-type connector for isolated input and output channels
- High-voltage isolation on output channels

### Introduction

PCI-1730U, PCI-1733, and PCI-1734 offer isolated digital input channels as well as isolated digital output channels with isolation protection up to 2,500 V<sub>DC</sub>, which makes them ideal for industrial applications where high-voltage isolation is required. There are also 32 TTL digital I/O channels on PCI-1730U.

### Specifications

#### Digital Input (PCI-1730U only)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Interrupt Capable Ch.** 2 (DI0, DI1)

#### Isolated Digital Input (PCI-1730U/ PCI-1733)

- **Channels** 16, 32
- **Input Voltage** Logic 0: 1 V max. (2 V max.)  
Logic 1: 5V min. (30 V max.)
- **Interrupt Capable Ch.** PCI-1730U: 2 (IDI0, IDI1)  
PCI-1733: 4 (IDI0, IDI1, IDI16, IDI17)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100 us

#### Digital Output (PCI-1730U only)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** Sink: 0.5 V max. @+24mA  
Source: 2.4 V min. @-15mA

#### Isolated Digital Output (PCI-1730U/ PCI-1734)

- **Channels** 16, 32
- **Output Type** Sink type (NPN)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink Current** PCI-1730U: 300 mA max./channel  
PCI-1734: 200 mA max./channel
- **Opto-Isolator Response** 100 us

#### General

- **Bus Type** PCI V2.2 (Universal PCI V2.2 for PCI-1730U)
- **I/O Connectors** 1 x DB37 female connector  
4 x 20-pin box header (PCI-1730U only)
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 250 mA, 12 V @ 35 mA  
Max.: 5 V @ 400 mA, 12 V @ 60 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-4 ~ 185°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

### Ordering Information

- **PCI-1730U** 32-ch Isolated Digital I/O Univ. PCI Card
- **PCI-1733** 32-ch Isolated Digital Input PCI Card
- **PCI-1734** 32-ch Isolated Digital Output PCI Card

#### Accessories

- **PCL-10120-1E** 20-pin Flat Cable, 1 m
- **PCL-10120-2E** 20-pin Flat Cable, 2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-782** 16-ch Isolated DI Board w/ 1m 20-pin Flat Cable
- **PCLD-885** 16-ch Power Relay Board w/ 20p & 50p Flat Cables
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controllers](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)  
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)  
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)  
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)  
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)  
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)