


PCI-1735U PCI-1737U PCI-1739U

64-ch Digital I/O and Counter Universal PCI Card

24-ch Digital I/O Universal PCI Card

48-ch Digital I/O Universal PCI Card

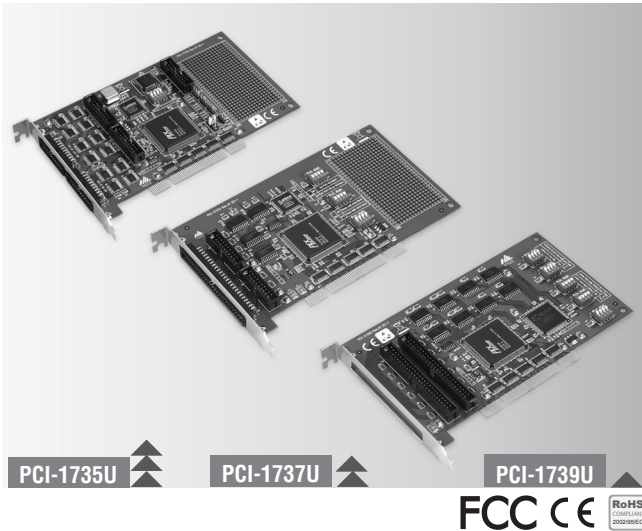

Features

- ISA-Compatible with PCL-720+ (PCI-1735U), PCL-724 (PCI-1737U) and PCL-731 (PCI-1739U)
- TTL-level digital input and output compatibility
- Emulates mode 0 of 8255 PPI (PCI-1737U and PCI-1739U)
- Interrupt handling capability (PCI-1737U and PCI-1739U)
- Output status readback (PCI-1737U and PCI-1739U)
- 3 programmable counter/timer channels and User configurable clock source (PCI-1735U)
- Breadboard area for custom circuits (PCI-1735U and PCI-1739U)
- PCI universal card

Specifications

Digital Input

- Channels**
 - PCI-1735U: 32
 - PCI-1737U: 24 (shared with output)
 - PCI-1739U: 48 (shared with output)
- Compatibility** 5 V/TTL
- Input Voltage**
 - PCI-1735: Logic 0: 0.8V max.
Logic 1: 2.0V min.
 - PCI-1737U/1739U: Logic 0: 0.4V max.
Logic 1: 2.4V min.
- Interrupt Capable Ch.**
 - PCI-1737U: 1
 - PCI-1739U: 2

Digital Output

- Channels**
 - PCI-1735U: 32
 - PCI-1737U: 24 (shared with input)
 - PCI-1739U: 48 (shared with input)
- Compatibility** 5 V/TTL
- Output Voltage**
 - PCI-1735U: Logic 0: 0.5 V max.
Logic 1: 2.4 V min.
 - PCI-1737U/1739U: Logic 0: 0.4 V max.
Logic 1: 2.4 V min.
- Output Capability**
 - PCI-1735U: Sink: 0.5 V @ 24 mA
Source: 2.4 V @ 15 mA
 - PCI-1737U/1739U: Sink: 0.4 V @ 24 mA
Source: 2.4 V @ 15 mA

Counter/Timer (PCI-1735U)

- Channels** 3
- Resolution** 16 bits
- Compatibility** 5 V/TTL
- Max. Input Frequency** 1 MHz
- Re. Clock Internal** Selectable 1 MHz, 100 kHz, or 10 kHz base clock
- Ext. Clock Frequency** Jumper selectable divider: x2, x1, x0.5, and x0.25

- Prog. Counter Modes** 6

General

- Bus Type** Universal PCI V2.2
- I/O Connectors**
 - PCI-1735U: 5 x 20-pin box header
 - PCI-1737U: 2 x 20-pin & 1 x 50-pin box header
 - PCI-1739U: 2 x 50-pin box header
- Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- Power Consumption**
 - PCI-1735U: 5V @365 mA (max.)
 - PCI-1737U: 5V @300 mA (max.)
 - PCI-1739U: 5V @720 mA (max.)
- Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- Storage Temperature** -25 ~ 80°C (-13 ~ 176°F)
- Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- PCI-1735U** 64-ch Digital I/O and Counter Card
- PCI-1737U** 24-ch Digital I/O Universal PCI Card
- PCI-1739U** 48-ch Digital I/O Universal PCI Card

Accessories

- PCL-10120-1E** IDC-20 Flat Cable, 1 m
- PCL-10120-2E** IDC-20 Flat Cable, 2 m
- PCL-10150-1.2E** 50-pin Flat Cable, 1.2 m
- ADAM-3920** 20-Pin Flat Cable Terminal, DIN-rail Mount
- ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)