


PCIE-1620

PCIE-1622

8-Port RS-232 PCI Express Communication Card

8-Port RS-232/422/485 PCI Express Communication Card

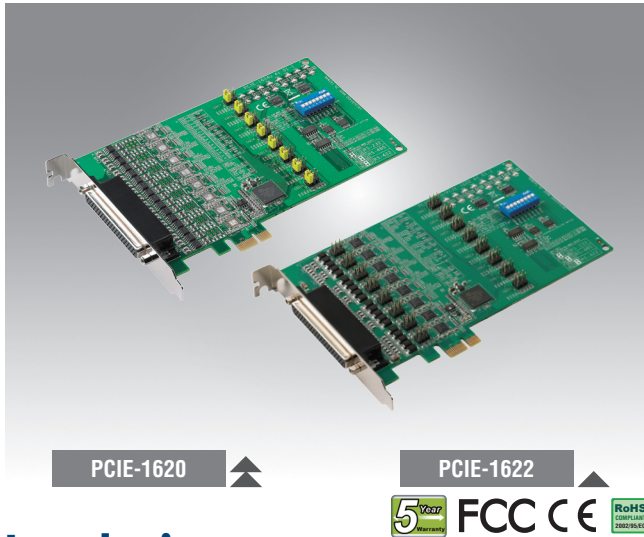

Features

- PCI Express bus 2.0 compliant
- Up to 921.6 kbps speed for extremely fast data transmissions
- Supports any baud rate setting
- 8 x RS-232 or RS-232/422/485 ports
- XR17V358 UART with 256-byte FIFOs
- Supports Windows XP/7/8/10, and Linux operating systems
- Board ID function for fixed COM ports

Introduction

PCIE-1620 and PCIE-1622 are 8-port RS-232/RS-232/422/485 PCI Express communication cards, compatible with the PCI Express x1 specification. Featuring 8 EFT protected ports (up to 1,000 V) with high data transmission speeds (up to 921.6 kbps) and high-performance XR17V358 UARTs with 256-byte FIFOs to reduce CPU load, PCIE-1620 and PCIE-1622 are ideal for diverse applications in multitasking environments.

Specifications

General

- **Bus Type** PCI Express bus 2.0 compliant
- **Bus Interface** PCI Express x1
- **Certification** CE, FCC class A
- **Connectors** 1 x DB62, female (PCIE-1620A/22A/22B)
1 x DB78, female (PCIE-1622C)
- **Dimensions (L x H)** 168 x 111 mm (6.6" x 4.4")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- **Comm. Controller** XR17V358
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD (PCIE-1620A/22B) TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI (PCIE-1622C) RS-422: Tx+, Tx-, Rx+, Rx- (PCIE-1620A/22A/22B) CTS+, CTS-, RTS+, RTS-, Tx+, Tx-, Rx+, Rx- (PCIE-1622C) RS-485: Data+, Data- (PCIE-1622)
- **FIFO** 256 bytes
- **Flow Control** DTR/DSR, RTS/CTS, Xon/Xoff
- **Parity** None, Odd, Even, Mark, or Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Protection

Part Number	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1620A	15KV (air), 8KV (contact)	1000 V		
PCIE-1622B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1622C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{DC}

Software

- **Bundled Software** ICOM tools
- **OS Support** Windows XP/7/8/10 and Linux (check the software release note for versions supported)

Environment

- **Operating Humidity** 5 ~ 95% RH, non-condensing
- **Operating Temperature** -10 ~ 60 °C (14 ~ 140 °F)
- **Storage Temperature** -25 ~ 85 °C (-13 ~ 185 °F)

Ordering Information

- **PCIE-1620A-BE** 8-port RS-232 PCI Express comm. card
- **PCIE-1622B-BE** 8-port RS-232/422/485 PCI-Express comm. card w/ surge
- **PCIE-1622C-AE** 8-port RS-232/422/485 PCI-Express comm. card w/ surge and isolation protection

Accessories

- **OPT8C-AE** 1 x DB62 to 8 x DB25 cable, 1 m (for PCIE-1620A-BE and PCIE-1622B-BE)
- **OPT8H-AE** 1 x DB62 to 8 x DB9 cable, 1 m (for PCIE-1620A-BE and PCIE-1622B-BE)
- **OPT8J-AE** 1 x DB78 to 8 x DB9 cable, 1 m (for PCIE-1622C-AE)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)