




25X No. 2008-25
 50X No. 2008-50
 75X No. 2008-75
 100X No. 2008-100

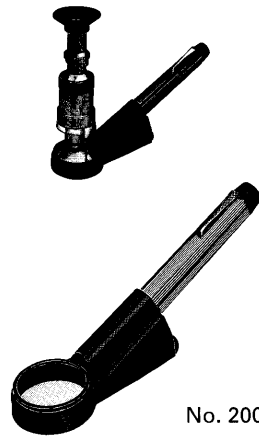

No. 2008-LH


PEAK STAND MICROSCOPE

Peak Stand Microscope is a small size, lightweight and conveniently portable microscope. It is designed to cover the range in between the high grade, heavily equipped microscopes and the various magnifiers (3X–30X) developed by our company. It can easily, speedily and accurately catch the subject to be examined with its bright and superior resolving power and smooth-working mechanism.


Especially, the precision-made focusing ring, which simplifies operation, and the freely attachable/detachable black colored rubber eyepiece increase the ease in observation

By reading the scale engraved on the focusing ring and the main needle of the lens barrel, depths can be measured with the accuracy of 0.1 mm. This microscope is convenient for measuring the thickness, height or depth of subjects having different levels and for measuring the lengths of printing machine cylinders and copperplates.


SCALE



25X PS No. 24
 50X PS No. 13
 75X PS No. 34
 100X PS No. 44



25X PS No. 25
 50X PS No. 14
 75X PS No. 35
 100X PS No. 45



25X PS No. 26
 50X PS No. 15
 75X PS No. 36
 100X PS No. 46

A scale is built into the scale chamber above the focusing ring. This scale can be easily interchanged according to use. Three kinds of scales—standard, for tools, for printing—are available. Specially designed scale can also be made to order.

The lens barrel of the eyepieces is the visibility adjustment ring. First, turn this ring and set it at the position where the scale can be seen clearly. Then turn the focusing ring and start observations.


Peak Stand Microscope is ideal for use in factories, inspection rooms, research laboratories, and private homes.

Optional light source (No. 2008-LH Light Holder) is available.

Item No.	No. 2008-25	No. 2008-50	No. 2008-75	No. 2008-100
Magnification	25X	50X	75X	100X
Field of view	3.30 mm ϕ	1.70 mm ϕ	1.09 mm ϕ	0.84 mm ϕ
Min. scale division	No.24 0.05 mm No.26 0.002"	No.13 0.02 mm No.15 0.001"	No.34 0.01 mm No.36 0.0005"	No.44 0.005 mm No.46 0.0005"
Measuring range	3.0 mm	1.6 mm	1.0 mm	0.8 mm
Working distance	17.0 mm	11.7 mm	11.7 mm	11.6 mm
Numerical aperture	0.11	0.18	0.22	0.22
Focal distance	19.8 mm	14.9 mm	9.9 mm	9.9 mm
Size	41.5 ϕ \times 122 mm			
Net weight	83 gm.	83 gm.	83 gm.	88 gm.



25X No. 2008-25
 50X No. 2008-50
 75X No. 2008-75
 100X No. 2008-100

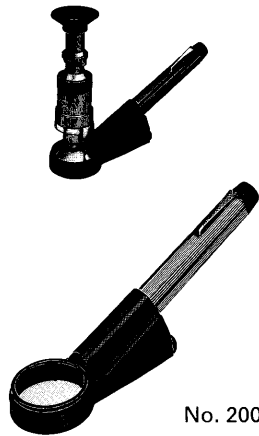

No. 2008-LH


PEAK STAND MICROSCOPE

Peak Stand Microscope is a small size, lightweight and conveniently portable microscope. It is designed to cover the range in between the high grade, heavily equipped microscopes and the various magnifiers (3X–30X) developed by our company. It can easily, speedily and accurately catch the subject to be examined with its bright and superior resolving power and smooth-working mechanism.


Especially, the precision-made focusing ring, which simplifies operation, and the freely attachable/detachable black colored rubber eyepiece increase the ease in observation

By reading the scale engraved on the focusing ring and the main needle of the lens barrel, depths can be measured with the accuracy of 0.1 mm. This microscope is convenient for measuring the thickness, height or depth of subjects having different levels and for measuring the lengths of printing machine cylinders and copperplates.


SCALE



25X PS No. 24
 50X PS No. 13
 75X PS No. 34
 100X PS No. 44



25X PS No. 25
 50X PS No. 14
 75X PS No. 35
 100X PS No. 45



25X PS No. 26
 50X PS No. 15
 75X PS No. 36
 100X PS No. 46

A scale is built into the scale chamber above the focusing ring. This scale can be easily interchanged according to use. Three kinds of scales—standard, for tools, for printing—are available. Specially designed scale can also be made to order.

The lens barrel of the eyepieces is the visibility adjustment ring. First, turn this ring and set it at the position where the scale can be seen clearly. Then turn the focusing ring and start observations.

Peak Stand Microscope is ideal for use in factories, inspection rooms, research laboratories, and private homes.

Optional light source (No. 2008-LH Light Holder) is available.

Item No.	No. 2008-25	No. 2008-50	No. 2008-75	No. 2008-100
Magnification	25X	50X	75X	100X
Field of view	3.30 mm ϕ	1.70 mm ϕ	1.09 mm ϕ	0.84 mm ϕ
Min. scale division	No.24 0.05 mm	No.13 0.02 mm	No.34 0.01 mm	No.44 0.005 mm
	No.26 0.002"	No.15 0.001"	No.36 0.0005"	No.46 0.0005"
Measuring range	3.0 mm	1.6 mm	1.0 mm	0.8 mm
Working distance	17.0 mm	11.7 mm	11.7 mm	11.6 mm
Numerical aperture	0.11	0.18	0.22	0.22
Focal distance	19.8 mm	14.9 mm	9.9 mm	9.9 mm
Size	41.5 ϕ × 122 mm			
Net weight	83 gm.	83 gm.	83 gm.	88 gm.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Peak manufacturer](#):

Other Similar products are found below :

[UTP05](#) [ELSM](#) [IDT8A](#) [RJA11](#) [ZEN50](#) [CRC01M](#) [ESRLHP2](#) [LLSM](#) [PTPM](#) [UTP05E](#) [LCR40+DCA55+ATC55](#) [SMD03](#) [RJC08](#) [CRC01](#)
[ATC02](#) [IDT8B](#) [IDT8C](#) [SMD03M](#) [LCD02](#) [ATC55](#) [ENP90](#) [ESR70](#) [DCA75](#) [IDTN](#) [UPS56](#) [PAT02](#) [LCRLHP2](#) [PCA23](#) [LCR-40](#)