



NTE621 Silicon Rectifier, General Purpose, High Voltage, Standard Recovery DO-213AB Surface Mount Type Case

Features:

- High Temperature Metallurgically Bonded
- Glass Passivated Junction
- High Temperature Soldering Guaranteed:
+450°C/5 Seconds at Terminals. Complete Device Submersible Temperature of
+260°C/10 Seconds in Solder Bath.


Maximum Ratings and Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified.
60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

Maximum Recurrent Peak Reverse Voltage, V_{RRM}	400V
Maximum RMS Voltage, V_{RMS}	280V
Maximum DC Blocking Voltage, V_{DC}	400V
Maximum Average Forward Rectified Current, $I_{T(AV)}$	1A
Peak Forward Surge Current, I_{FSM} (8.3ms Single Half Sine-Wave Superimposed on Rated Load)	30A
Maximum Instantaneous Forward Voltage ($I_T = 1A$), V_F	1.1V
Maximum DC Reverse Current ($V_{DC} = 400V$), I_R $T_A = +25^\circ\text{C}$	10µA
$T_A = +125^\circ\text{C}$	50µA
Maximum Full Load Reverse Current (Full Cycle Average at $T_A = +75^\circ\text{C}$), $I_{R(AV)}$	30µA
Typical Junction Capacitance (Note 1), C_J	15pF
Operating Junction Temperature Range, T_J	-65° to +175°C
Storage Temperature Range, T_{stg}	-65° to +175°C
Maximum Thermal Resistance, Junction-to-Terminal (Note 2), R_{thJL}	30°C/W
Maximum Thermal Resistance, Junction-to-Ambient (Note 3), R_{thJA}	75°C/W

Note 1. Measured at 1MHz and applied reverse voltage of $4V_{DC}$.

Note 2. Thermal resistance, junction-to-terminal, 6.0mm^2 copper pads to each terminal.

Note 3. Thermal resistance, junction-to-ambient, 6.0mm^2 copper pads to each terminal.

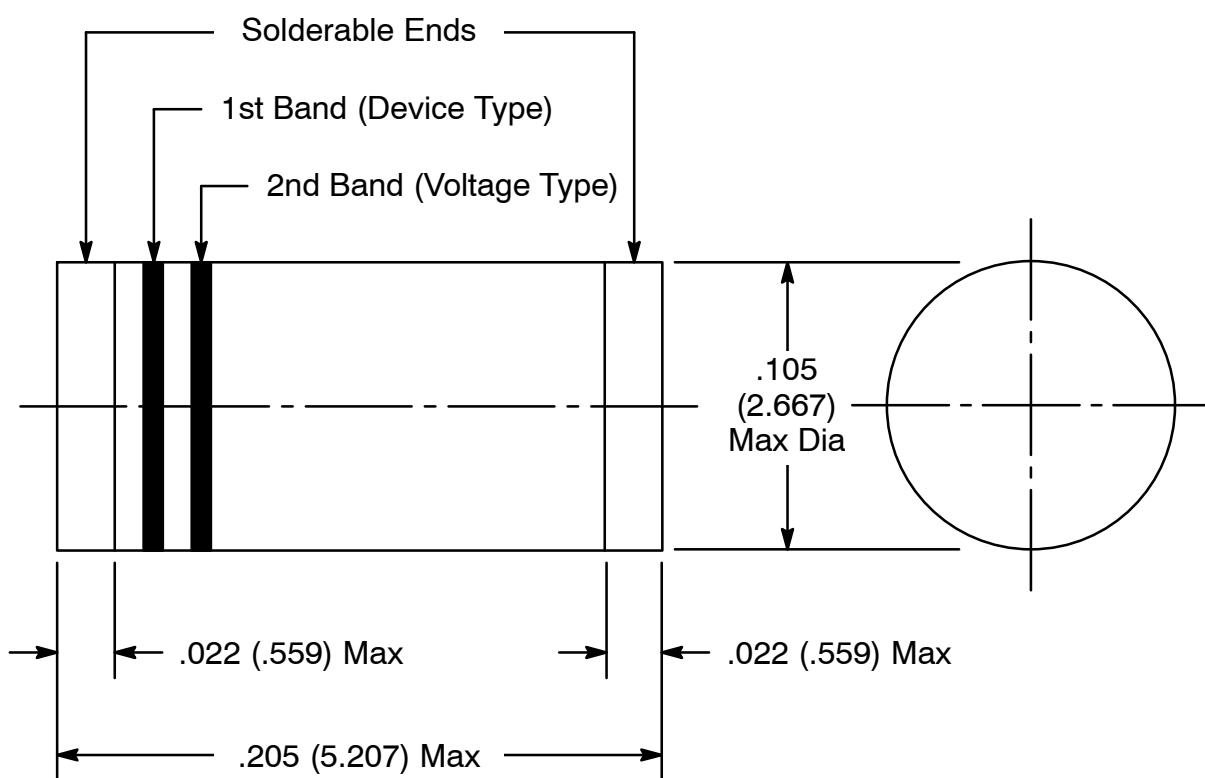

Two Bands Indicates Cathode

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NTE manufacturer:

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [WH20-04-25](#) [04-SLPE3750A](#) [5615](#) [591](#) [69-](#)
[36WW-WR-KIT](#) [7056](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [NEV470M50FF](#)
[NTE133](#) [NTE542](#) [NTE74154](#) [R02-11A10-120H](#) [04-SCBW25L-BK](#) [04-SCBW6C-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-](#)
[GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-](#)
[SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-](#)
[SCBW25L-WH](#) [04-ESNF-500L](#)