


CONFIGURATION	PART NUMBER	LENGTH
MINI, 3 PIN, 16AWG MALE PLUG STRAIGHT	MN33AC01Mxxx	AS REQUESTED

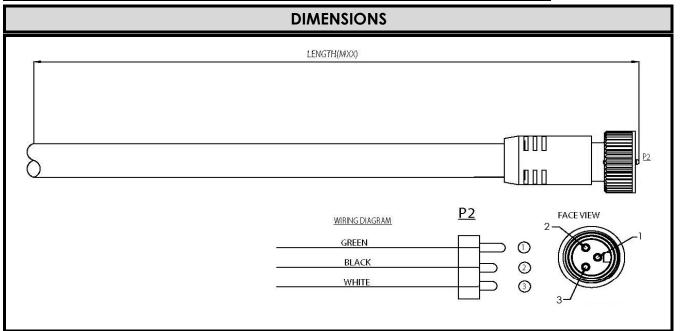

TECHNICAL DATA		
APPROVALS:	UL, c(UL)	
TEMPERATURE RANGE:	-20C to +105C	
PROTECTION:	IP 67, NEMA 6P	
VOLTAGE RATING:	600VAC	
AMPERAGE:	13A	
HOUSING:	OIL RESISTANT PVC	
CONTACTS:	COPPER ALLOY	
CONTACT PLATING:	GOLD OVER NICKEL PLATING	
CONNECTOR FACE:	PVC	
COUPLING:	MACHINED ALUMINUM, ANODIZED	
CABLE CHARACTERISTICS:	STOOW 600V 105°C CSA ST FT2-ROHS	
	PVC INSULATED 16AWG STRANDED COPPER (65x #34)	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Amphenol manufacturer:

Other Similar products are found below:

PT01SE-16-8P(476) EN2997SE01006MN CTV06RW-11-2JB-LC JTPQ00RT-16-35P(453) MS3106B18-11PX GTS030-18-11S-116 10-507142-843 D38999/26JD19SALC D38999/26JD18PA JT07RT-22-35P D38999/26JD18SALC D38999/26JD18JA 18-428 JT07RT-22-35PC PT02E8-2S-072 GTS06-14S-9SZ-025 97-3102A22-10SW-958 97-3102A22-10SX-958 97-3102A22-10SY-958 97-3102A22-5SW-959 97-3102A22-5SX-959 TVS06RF-17-35AD MS27468E25F43S 97-3101A14S-9PX-959 97-3101A14S-9PW-959 JT07RT-8-35S MS27468E15F19PLC D38999/26JD35JA GTC030-28-21P-025-A31 AIB2-22-14SC-072 AIB2-22-22SC-RDS-072 TVPS00RK-11-2AC AIB2-22-22PC-072 100-007-213-002-001 MS3108B28-15PY JT07RT-22-14PB-453 GTS00AF28-7S 2M801-010-01M16-5SA TV07DZ-23-151S-S1 TV07DZ-23-151S-S1AD TVS06RF-21-79S(LC) TVS07RF-21-79S(LC) GTS00A-28-84S PT03SE-14-12PLC GTCL01-24-2SW-025-B30 AIB30-14S-5SC-L AIB30-14S-5SXC-L 97-3108A14S-5PX TVS07RF-19-11BB CTVS06RF-17-6BB