

Specification Status: Released

Electrical Rating

Voltage: 72V MAX
Current: 40A MAX

Insulating Material:

Cured, Flame Retardant Epoxy Polymer
meets UL94 V-0 Requirements

Lead Material:

24 AWG Tin Plated Copper Clad Steel

Marking:

Manufacturer's Mark
and Voltage
 72
 XF020 Part Identification
 Lot Identification
(can be on back)

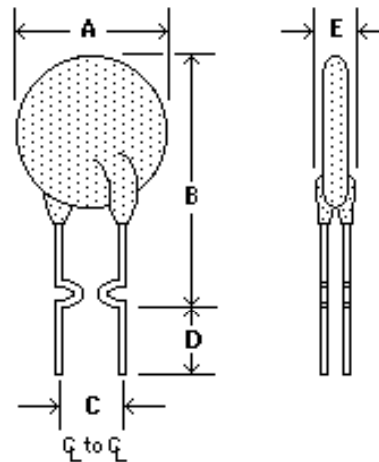


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.4	--	11.7	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.29)	--	(0.46)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD TRIP	OHMS AT 20°C MIN MAX				
0.20	0.20	0.40	1.83	2.75	2.2	4.40	0.41

Agency Recognitions:

UL, CSA, TUV

Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b).
PS300

Reference Documents:

This specification takes precedence over documents referenced herein.

Precedence:

Reference documents shall be the issue in effect on the date of invitation for bid.

Effectivity:

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC
Compliant

Directive 2000/53/EC
Compliant



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC category](#):

Click to view products by [Littelfuse manufacturer](#):

Other Similar products are found below :

[0001.1010.G](#) [D38999/20WG39JN](#) [F02B250V1-4AS](#) [ASMD185-2](#) [EN2997S61212AN](#) [EN2997SE61203AN](#) [BK-ABC-V-5-R](#) [LR4-550RAF](#)
[SMD125-2](#) [F60C500V20AS](#) [TR600-150Q-B-0.5-0.130](#) [BK-AGX-20](#) [5E4795/04-1502](#) [EN2997S61212MN](#) [EN2997SE61203MN](#)
[EN2997SE61212AN](#) [EN2997SE61212MN](#) [EN2997KE61212MN](#) [EN2997K61212MN](#) [EN2997SE02219M8](#) [EN2997SE02219A8](#)
[EN2997S02219M8](#) [EN2997S02219A8](#) [EN2997KE61212AN](#) [EN2997K61212AN](#) [TR-3216FF20-R](#) [TRF250-080T-B-1.0-0.125](#)
[JT06RT1832BN014](#) [120110-0044](#) [SMD100-2](#) [F03A250V1-1-2AS](#) [BK-AGC-1-8-R](#) [BK-AGC-2-10-R](#) [BK-AGC-7-1-2](#) [BK-MDL-1-6-10-R](#)
[BK-SFE-4](#) [BK-ABC-1-R](#) [BK-C518-250-R](#) [BK-GDB-2A](#) [BK-MDL-1-8-R](#) [BK-MDL-6](#) [BK-AGC-5-R](#) [BK-ATC-2](#) [BK-C520-100-R](#) [BK-](#)
[MDA-5-R](#) [BK-PCC-1-R](#) [BK-S506-5-R](#) [BK-GBB-5-R](#) [BK-GMA-6-R](#) [BK-GMC-1-R](#)