



超快恢复二极管 Super Fast Rectifier

■特征 Features

- . I_o 2.0A
- .VRRM 50V-600V
- .耐正向浪涌电流能力高
- .High surge current capability


■用途 Applications

- .整流用 Rectifier

■极限值（绝对最大额定值）

.Limiting Values (Absolute Maximum Rating)

■外形尺寸和印记 Outline Dimensions and Mark

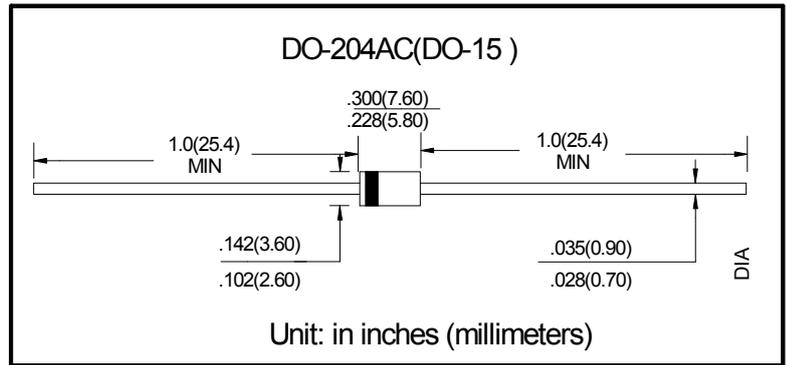

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	SF2							
				1	2	3	4	5	6	7	8
反向重复峰值电压 Repetitive Peak Reverse Voltage	VRRM	V		50	100	150	200	300	400	500	600
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60HZ, 电阻负载, T_a (FIG 1); 60HZ Half-sine wave, Resistance load, T_a (FIG 1)	2.0							
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I_{FSM}	A	(正弦半波 60HZ, 一个周期, $T_a=25^\circ\text{C}$) (60HZ Half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$)	50							
结温 Junction Temperature	T_j	$^\circ\text{C}$		-55~+125							
储存温度 Storage Temperature	T_{stg}	$^\circ\text{C}$		-55 ~ +150							

■电特性（ $T_a=25^\circ\text{C}$ 除非另有规定）Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	SF2							
				1	2	3	4	5	6	7	8
正向峰值电压 Peak Forward Voltage	V _{FM}	V	$I_{FM}=2.0A$	0.95			1.3		1.7		
反向峰值电流 Peak Reverse Current	I _{RRM1}	μA	VRM=VRRM	$T_a=25^\circ\text{C}$							
	I _{RRM2}			$T_a=125^\circ\text{C}$							
反向恢复时间 Reverse Recovery time	T _{rr}	ns	$I_F=0.5A$ $I_R=1A$ $I_{RR}=0.25A$	35							
热阻(典型) Thermal Resistance(Typical)	R θ J-A	$^\circ\text{C}/\text{W}$	结和环境之间 Between junction and ambient	40							
结电容 Typical junction capacitance	C _j	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C.	50				30			

■特性曲线(典型) Characteristics(Typical)





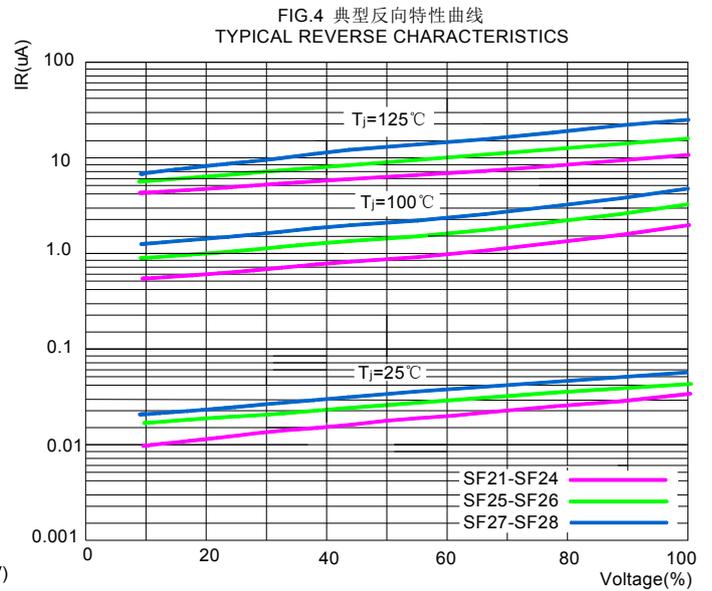


FIG.5 反向恢复时间试验电路及测试波形示意图
Diagram of circuit and Testing wave form of reverse recovery time

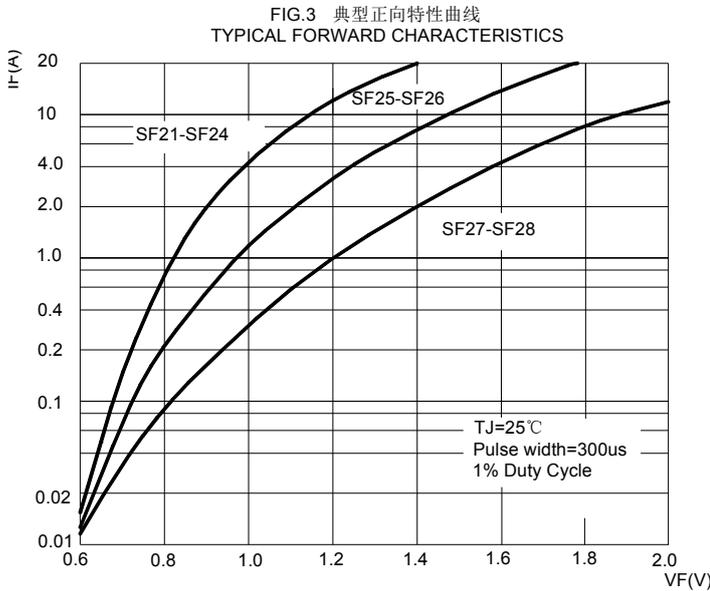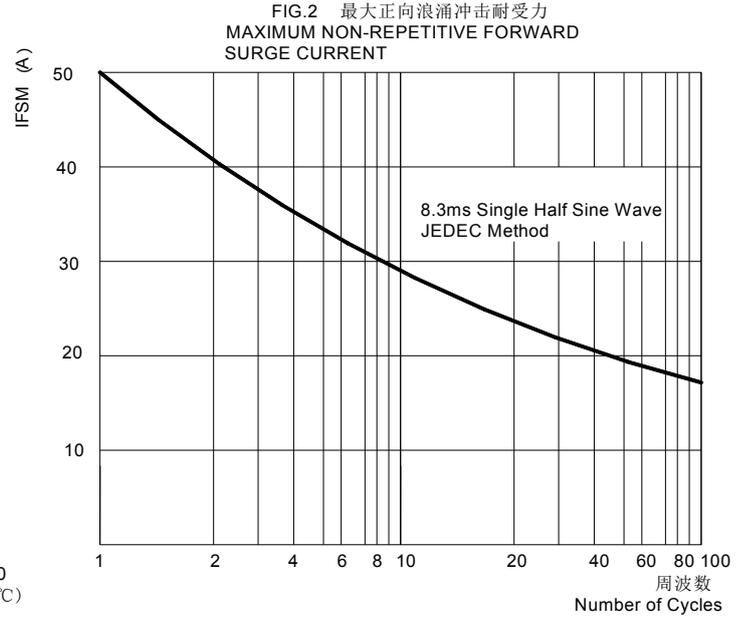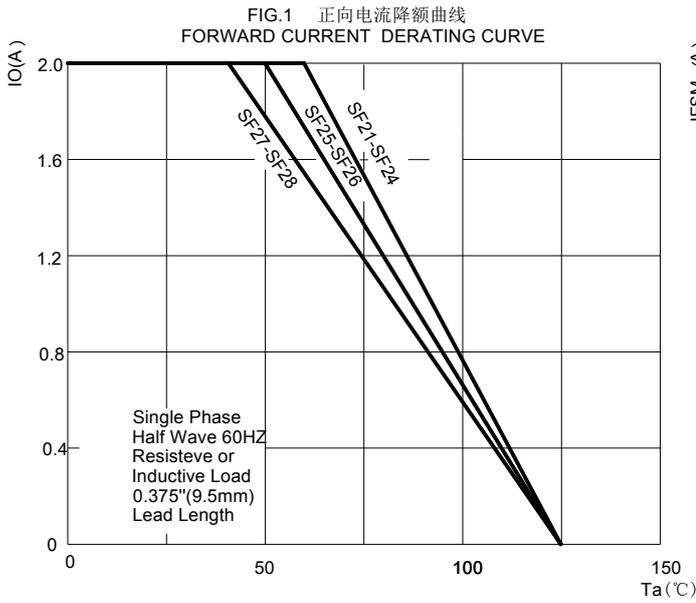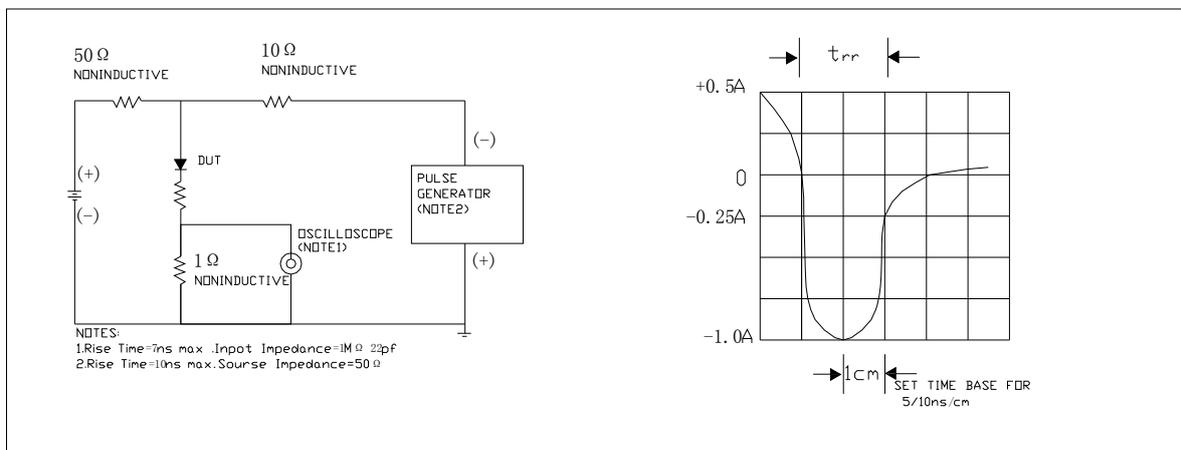

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [Yangjie manufacturer](#):

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)