



超快恢复二极管 Super Fast Rectifier

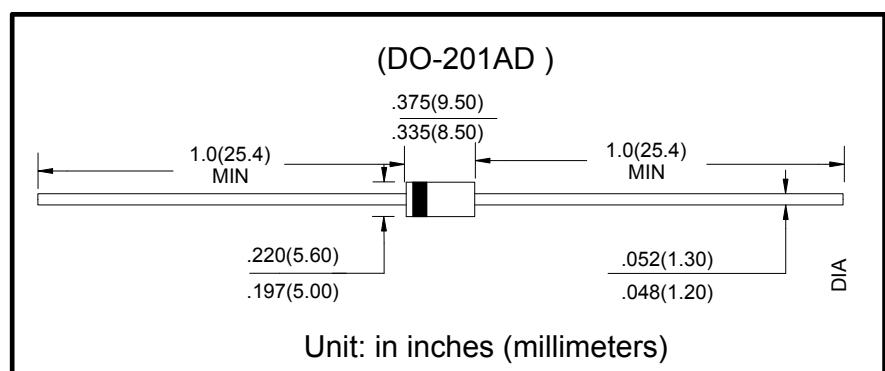
■特征 Features

- $I_{f\max}$ 3.0A
- VRM 50V-600V
- 耐正向浪涌电流能力高
- High surge current capability

■用途 Applications

- 整流用 Rectifier

■外形尺寸和印记 Outline Dimensions and Mark



■极限值 (绝对最大额定值)

Limiting Values (Absolute Maximum Rating)

| 参数名称 Item | 符号 Symbol | 单位 Unit | 条件 Conditions | SF3 | | | | | | | |
|---|--------------|------------|---|------------|-----|-----|-----|-----|-----|-----|-----|
| | | | | 1G | 2G | 3G | 4G | 5G | 6G | 7G | 8G |
| 反向重复峰值电压 Repetitive Peak Reverse Voltage | V_{RRM} | V | | 50 | 100 | 150 | 200 | 300 | 400 | 500 | 600 |
| 正向平均电流 Average Forward Current | $I_{F(AV)}$ | A | 正弦半波 60Hz, 电阻负载, T_a (FIG 1) 60Hz Half-sine wave, Resistance load, T_a (FIG 1) | 3.0 | | | | | | | |
| 正向(不重复)浪涌电流 Surge(Non-repetitive)Forward Current | I_{FSM} | A | 正弦半波 60Hz, 一个周期, $T_a=25^\circ C$ 60Hz Half-sine wave, 1 cycle, $T_a=25^\circ C$ | 125 | | | | | | | |
| 结温 Junction Temperature | T_J | °C | | -55~+150 | | | | | | | |
| 储存温度 Storage Temperature | T_{STG} | °C | | -55 ~ +150 | | | | | | | |

■电特性 ($T_a=25^\circ C$ 除非另有规定)Electrical Characteristics ($T_a=25^\circ C$ Unless otherwise specified)

| 参数名称 Item | 符号 Symbol | 单位 Unit | 测试条件 Test Condition | SF3 | | | | | | | | | | | |
|---------------------------------------|------------------|------------|--|-------------------|-----|----|----|-----|----|----|----|--|--|--|--|
| | | | | 1G | 2G | 3G | 4G | 5G | 6G | 7G | 8G | | | | |
| 正向峰值电压 Peak Forward Voltage | V_{FM} | V | $I_{FM}=3.0A$ | 0.95 | | | | 1.3 | | | | | | | |
| 反向峰值电流 Peak Reverse Current | I_{RRM1} | μA | $V_{RM}=V_{RRM}$ | $T_a=25^\circ C$ | 5 | | | | | | | | | | |
| | I_{RRM2} | | | $T_a=125^\circ C$ | 150 | | | | | | | | | | |
| 反向恢复时间 Reverse Recovery time | t_{rr} | ns | $I_F=0.5A$ $I_R=1A$ $I_{RR}=0.25A$ | 35 | | | | | | | | | | | |
| 热阻(典型) Thermal Resistance(Typical) | $R_{\theta J-A}$ | °C/W | 结和环境之间 Between junction and ambient | 25 | | | | | | | | | | | |
| 结电容 Typical junction capacitance | C_J | pF | Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C. | 80 | | | | 70 | | | | | | | |

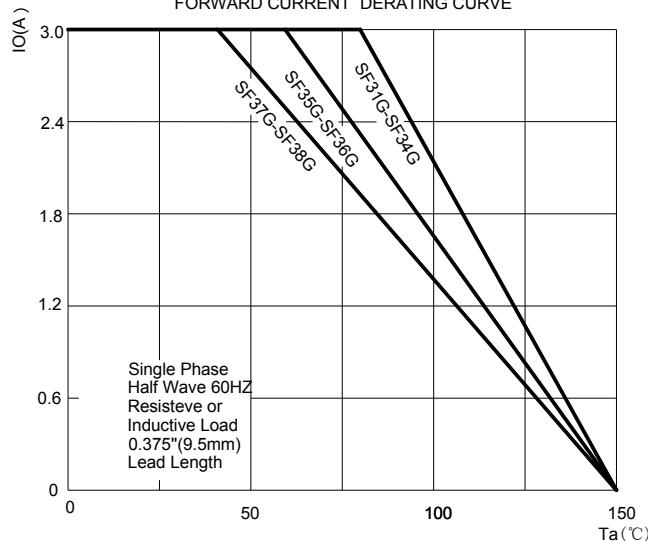
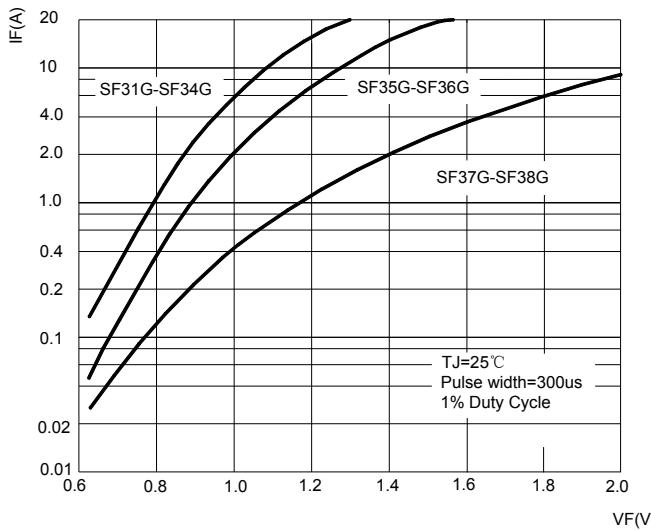
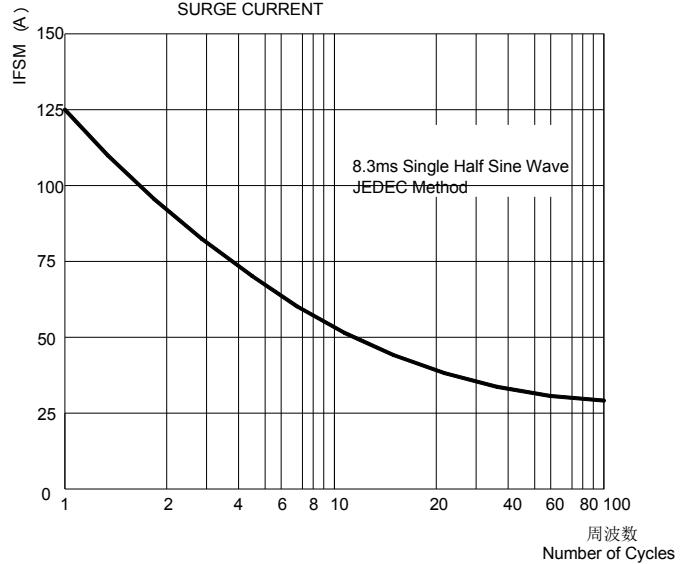
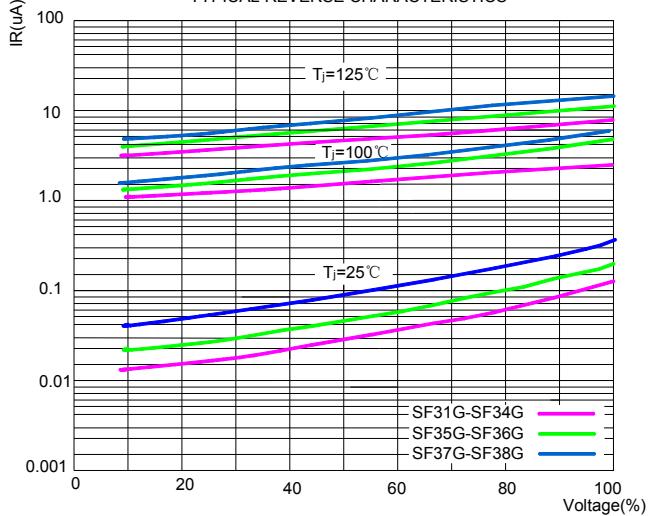
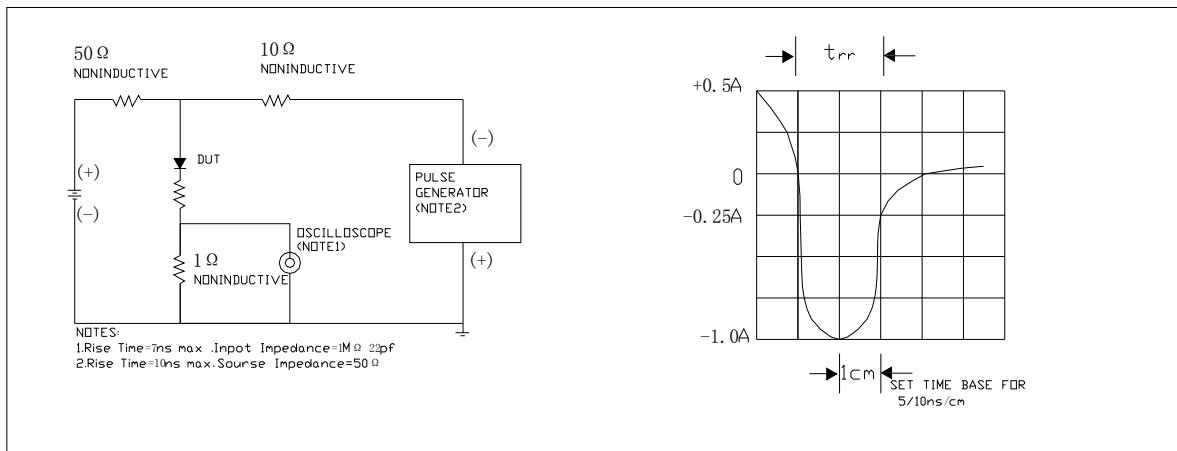


SF31G THRU SF38G

■特性曲线(典型) Characteristics(Typical)

FIG.1 正向电流降额曲线

FORWARD CURRENT DERATING CURVE

FIG.3 典型正向特性曲线
TYPICAL FORWARD CHARACTERISTICSFIG.2 最大正向浪涌冲击耐受力
MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENTFIG.4 典型反向特性曲线
TYPICAL REVERSE CHARACTERISTICSFIG.5 反向恢复时间试验电路及测试波形示意图
Diagram of circuit and Testing wave form of reverse recovery time

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Yangjie manufacturer:

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMBD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)