

Features

Unregulated Converter

- 1 : 1 Input Range
- 0.25W SIP7 Package
- Efficiency up to 82%
- 1kVDC and 2kVDC Isolation Option
- Operating Temperature from -40°C to +100°C

Description

The RBL/E series DC/DC converter has been designed to offer exceptionally high efficiency, low quiescent current and an extended operating temperature range. Uses include battery powered supplies, high efficiency designs or high temperature applications.

Selection Guide

Part Number SMD	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	Max Capacitive Load ^{(1)**}
RBL-3.305S/E*	3.3	5	50	80	1000µF
RBL-0505S/E*	5	5	50	82	1000µF
RBL-1205S/E*	12	5	50	78	1000µF

Other input and output voltage combinations available on request

*add Suffix „H“ for 2 kVDC Isolation, e.g. RBL-3.305/EH

Specifications (measured at T_A = 25°C, nominal input voltage, full load and after warm-up)

Input Voltage Range		±10% max.
Voltage set accuracy	100% Load/nominal Vin	-2% typ. / ±5% max.
Line Regulation		1.2% typ. / 1% of Vin typ.
Load Regulation	(10% to 100% Load)	4% typ. / 10% max.
Ripple & Noise @ 20MHz BW		35mVp-p typ. / 50mVp-p max.
Efficiency	100% Load	70% min.
Operating Temperature		-40°C to +100°C
Storage Temperature		-55°C to +125°C
Isolation Voltage	(tested for 1 second)	1000VDC
	(rated for a minute**)	500VAC / 60Hz
Isolation Voltage	H-Suffix (tested for 1 second)	2000VDC
	H-Suffix (rated for a minute**)	1000VAC / 60Hz
Isolation Capacitance		75pF max.
Isolation Resistance		10 GΩ min.
Humidity		95% RH
Operating Frequency	Vin (nom.)	20kHz min. / 70 kHz max.
Quiescent Current (0% Load)	3.3VDC	11.2mA typ.
	5VDC	6mA typ.
	12VDC	4.2mA typ.
Short-Circuit Protection		1 Second
Weight		2.2 g
Packing Quantity		25pcs per tube
MTBF	Using MIL-HDBK 217F (+100°C)	1352 x 10 ³ hours
	Using MIL-HDBK 217F (+25°C)	4494 x 10 ³ hours

Detailed Information see Application Notes chapter „MTBF“

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Notes

Note1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1second without damage to the converter.

ECONOLINE

DC/DC-Converter

with 3 year Warranty


RECOM

0.25 Watt SIP7 Isolated Single Output




RBL/E

Derating-Graph (Ambient Temperature)

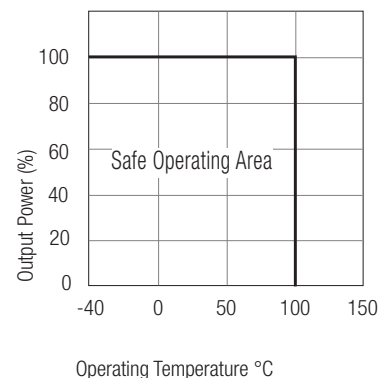


Refer to Application Notes

Typical Characteristics

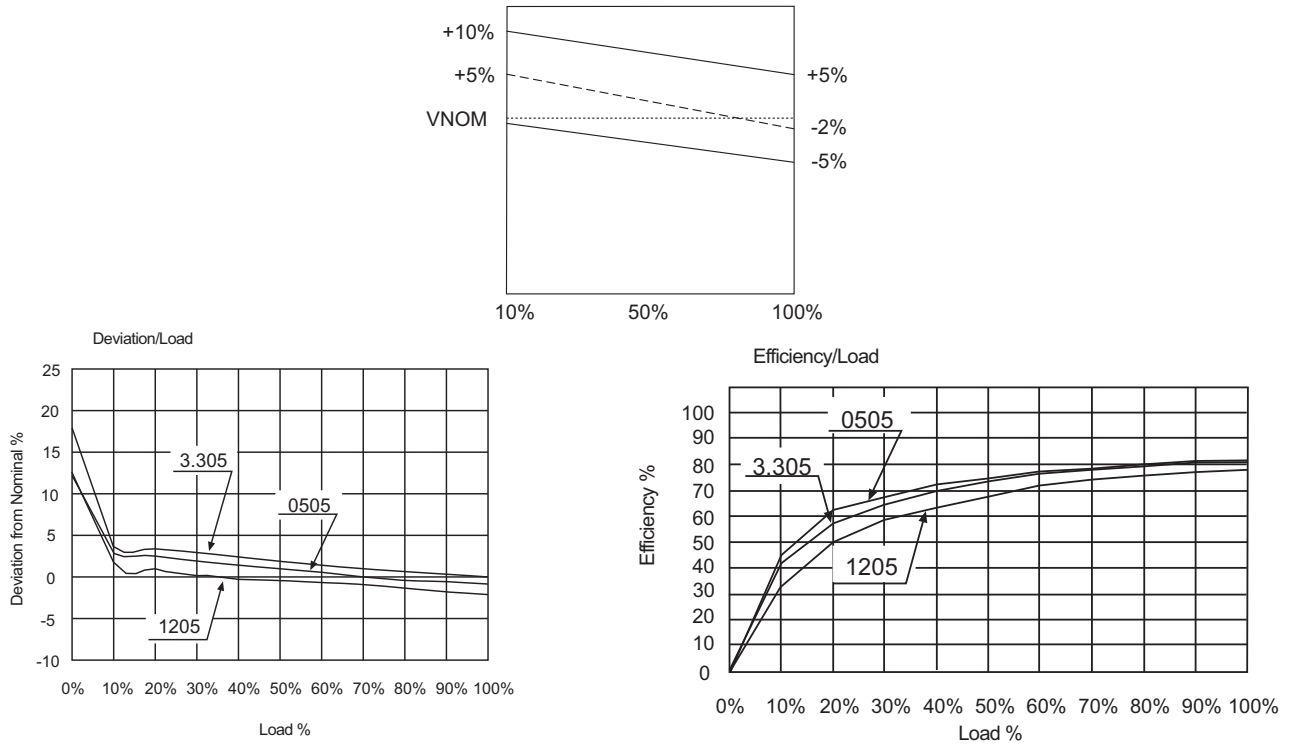

Package Style and Pinning (mm)

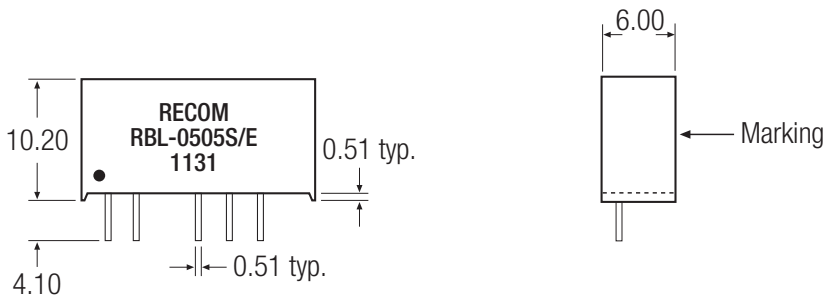

Pin Connections


Pin #	Function
1	+Vin
2	-Vin
4	NC
5	-Vout
6	+Vout

NC= No Connection

UNIT: mm

TOL.: ± 0.25 mm

Recommended Footprint

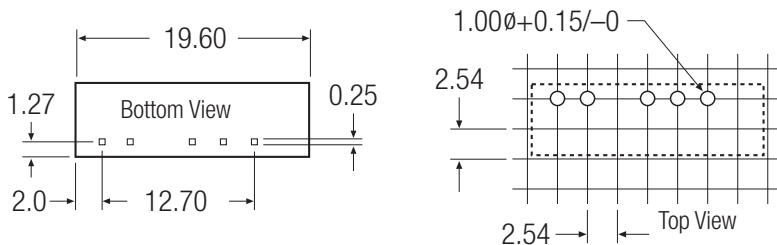

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Recom Power](#) manufacturer:

Other Similar products are found below :

[R0.5D10-0515](#) [R2S-1205HP](#) [RAC15-0515TA](#) [RACM40-12S](#) [RACM65-12S](#) [REC3-2409SRWH6ACTRL](#) [RP10-2415SEW](#) [R1S8-3.305/E](#)
[R24P09D](#) [R-745.0D](#) [RACD100-36](#) [REC20-2412DZ](#) [REC30-1212S](#) [REC3-243.3SRWH2A](#) [REC6-1215SRW/R8/A](#) [RO-1509S](#) [RS3-](#)
[0512D/H3](#) [RS-4815DZ](#) [RSO-0512D](#) [RSO-1215SZH3](#) [RW-0512D](#) [RY-2424DP](#) [REC3-4815DRWZ/H2/A](#) [REC3.5-2405SRW/R10/A](#) [REC8-](#)
[123.3SRW/H3/A/M](#) [REM6-2405SWA](#) [REM6-1205S/A](#) [RH-1212D/H6](#) [RI-0505S](#) [RP20-4805SFW](#) [RO-3.33.3S](#) [R1Z-3.305/HP](#) [RAC05-05SC](#)
[RAC06-05DC](#) [RACD150-1400A](#) [RACD45-700A](#) [RACD60-1050/TOF](#) [RACV12-24-LP](#) [RAC05-05SB](#) [RCD-24-1.00](#) [RCD-24-0.60WX3](#)
[RCD-24-1.00WX2](#) [REC5-4805SRWZ/H4/A](#) [RI-0515S/P](#) [CMC-06](#) [RP-051509D](#) [R05P215D/P](#) [RAC04-3.3SC/277](#) [RAC10-12DK/277](#)
[RAC10-24SC/277](#)