

# SK 35 GAL 12T4



**SEMITOP® 2**

IGBT module


**SK 35 GAL 12T4**

### Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- High short circuit capability
- Trench4 IGBT technology
- CAL4F diode technology
- $V_{CE,sat}$  with positive coefficient
- UL recognized, file no. E 63 532

### Typical Applications\*

- Inverter
- Motor drive



GAL

Absolute Maximum Ratings				
Symbol	Conditions		Values	Unit
<b>Chopper IGBT</b>				
$V_{CES}$	$T_j = 25\text{ °C}$		1200	V
$I_C$	$T_j = 175\text{ °C}$	$T_s = 25\text{ °C}$	43	A
		$T_s = 70\text{ °C}$	35	A
$I_{Cnom}$			35	A
$I_{CRM}$	$I_{CRM} = 3 \times I_{Cnom}$		105	A
$V_{GES}$			-20 ... 20	V
$t_{psc}$	$V_{CC} = 800\text{ V}$	$T_j = 150\text{ °C}$	10	$\mu\text{s}$
	$V_{GE} \leq 15\text{ V}$			
	$V_{CES} \leq 1200\text{ V}$			
$T_j$			-40 ... 175	$^{\circ}\text{C}$
<b>Chopper Diode</b>				
$I_F$	$T_j = 175\text{ °C}$	$T_s = 25\text{ °C}$	38	A
		$T_s = 70\text{ °C}$	30	A
$I_{Fnom}$			35	A
$I_{FRM}$	$I_{FRM} = 3 \times I_{Fnom}$		105	A
$I_{FSM}$	10 ms, sin 180°, $T_j = 150\text{ °C}$		170	A
$T_j$			-40 ... 175	$^{\circ}\text{C}$
<b>Freewheeling Diode</b>				
$I_F$	$T_j = 175\text{ °C}$	$T_s = 25\text{ °C}$	38	A
		$T_s = 70\text{ °C}$	30	A
$I_{Fnom}$			35	A
$I_{FRM}$	$I_{FRM} = 3 \times I_{Fnom}$		105	A
$I_{FSM}$	10 ms, sin 180°, $T_j = 150\text{ °C}$		170	A
$T_j$			-40 ... 175	$^{\circ}\text{C}$
<b>Module</b>				
$I_{t(RMS)}$				A
$T_{stg}$			-40 ... 125	$^{\circ}\text{C}$
$V_{isol}$	AC, sinusoidal, t = 1 min		2500	V

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
<b>Chopper IGBT</b>						
$V_{CE(sat)}$	$I_C = 35\text{ A}$ $V_{GE} = 15\text{ V}$ chiplevel	$T_j = 25\text{ °C}$	1.85	2.1		V
		$T_j = 150\text{ °C}$	2.25	2.45		V
$V_{CE0}$	chiplevel	$T_j = 25\text{ °C}$	0.8	0.9		V
		$T_j = 150\text{ °C}$	0.7	0.8		V
$r_{CE}$	$V_{GE} = 15\text{ V}$ chiplevel	$T_j = 25\text{ °C}$	30.0	34.3		m $\Omega$
		$T_j = 150\text{ °C}$	44.3	47.1		m $\Omega$
$V_{GE(th)}$	$V_{GE} = V_{CE}\text{ V}, I_C = 1.2\text{ mA}$		5	5.8	6.5	V
$I_{CES}$	$V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$	$T_j = 25\text{ °C}$	0.062	0.186		mA
		$T_j = 150\text{ °C}$				mA
$C_{ies}$	$V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	1.95			nF
$C_{oes}$		$f = 1\text{ MHz}$	0.155			nF
$C_{res}$		$f = 1\text{ MHz}$	0.115			nF
$Q_G$	- 8 V...+ 15 V		189			nC
$R_{Gint}$	$T_j = 25\text{ °C}$		-			$\Omega$

# SK 35 GAL 12T4



**SEMITOP® 2**

## IGBT module

### SK 35 GAL 12T4


#### Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- High short circuit capability
- Trench4 IGBT technology
- CAL4F diode technology
- $V_{CE,sat}$  with positive coefficient
- UL recognized, file no. E 63 532

#### Typical Applications\*

- Inverter
- Motor drive

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
<b>Chopper IGBT</b>						
$t_{d(on)}$	$V_{CC} = 600\text{ V}$	$T_j = 150\text{ °C}$		28		ns
$t_r$	$I_C = 35\text{ A}$	$T_j = 150\text{ °C}$		25		ns
$E_{on}$	$R_{G\ on} = 22\ \Omega$	$T_j = 150\text{ °C}$		3.27		mJ
	$R_{G\ off} = 22\ \Omega$	$T_j = 150\text{ °C}$				
$t_{d(off)}$	$di/dt_{on} = 2900\text{ A}/\mu\text{s}$	$T_j = 150\text{ °C}$		303		ns
$t_f$	$di/dt_{off} = 2900\text{ A}/\mu\text{s}$	$T_j = 150\text{ °C}$		70		ns
$E_{off}$	$V_{GE} = +15/-7\text{ V}$	$T_j = 150\text{ °C}$		3.3		mJ
$R_{th(j-s)}$	per IGBT			1.21		K/W
<b>Chopper Diode</b>						
$V_F = V_{EC}$	$I_F = 35\text{ A}$	$T_j = 25\text{ °C}$		2.3	2.62	V
	$V_{GE} = 15\text{ V}$ chipllevel	$T_j = 150\text{ °C}$		2.29	2.62	V
$V_{F0}$	chipllevel	$T_j = 25\text{ °C}$		1.3	1.5	V
		$T_j = 150\text{ °C}$		0.9	1.1	V
$r_F$	chipllevel	$T_j = 25\text{ °C}$		28.6	32.0	m $\Omega$
		$T_j = 150\text{ °C}$		39.7	43.4	m $\Omega$
$I_{RRM}$	$I_F = 35\text{ A}$	$T_j = 150\text{ °C}$		30		A
$Q_{rr}$	$di/dt_{off} = 2900\text{ A}/\mu\text{s}$	$T_j = 150\text{ °C}$		2		$\mu\text{C}$
	$V_{GE} = -7\text{ V}$	$T_j = 150\text{ °C}$				
$E_{rr}$	$V_R = 600\text{ V}$	$T_j = 150\text{ °C}$		1.46		mJ
$R_{th(j-s)}$	per Diode			1.55		K/W
<b>Freewheeling Diode</b>						
$V_F = V_{EC}$	$I_F = 35\text{ A}$	$T_j = 25\text{ °C}$		2.3	2.60	V
	$V_{GE} = 15\text{ V}$ chipllevel	$T_j = 150\text{ °C}$		2.29	2.62	V
$V_{F0}$	chipllevel	$T_j = 25\text{ °C}$		1.3	1.5	V
		$T_j = 150\text{ °C}$		0.9	1.1	V
$r_F$	chipllevel	$T_j = 25\text{ °C}$		28.6	32.0	m $\Omega$
		$T_j = 150\text{ °C}$		39.7	43.4	m $\Omega$
$I_{RRM}$	$I_F = 35\text{ A}$	$T_j = 150\text{ °C}$		30		A
$Q_{rr}$	$di/dt_{off} = 2900\text{ A}/\mu\text{s}$	$T_j = 150\text{ °C}$		2		$\mu\text{C}$
	$V_{GE} = -7\text{ V}$	$T_j = 150\text{ °C}$				
$E_{rr}$	$V_R = 600\text{ V}$	$T_j = 150\text{ °C}$		1.46		mJ
$R_{th(j-s)}$	per Diode			1.55		K/W
<b>Module</b>						
$L_{CE}$						nH
$R_{CC'+EE'}$			$T_s = 25\text{ °C}$			m $\Omega$
						m $\Omega$
$M_s$	Mounting torque to heatsink			1.8	2	Nm
$M_t$						Nm
						Nm
w				19		g
<b>Temperature Sensor</b>						
$R_{100}$						$\Omega$
$B_{100/125}$						K



**GAL**

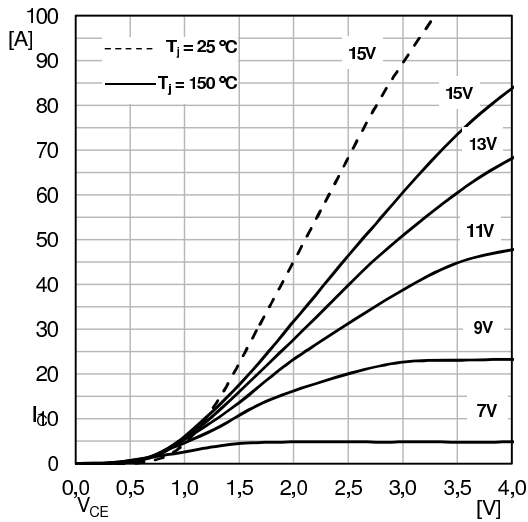


Fig. 1: Typical IGBT output characteristics

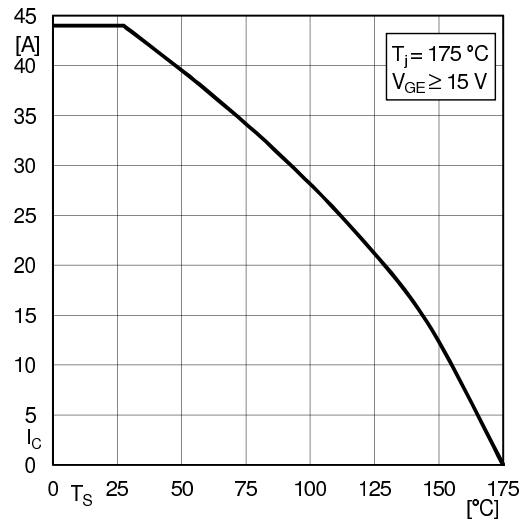


Fig. 2: Rated current vs. temperature  $I_C = f(T_S)$

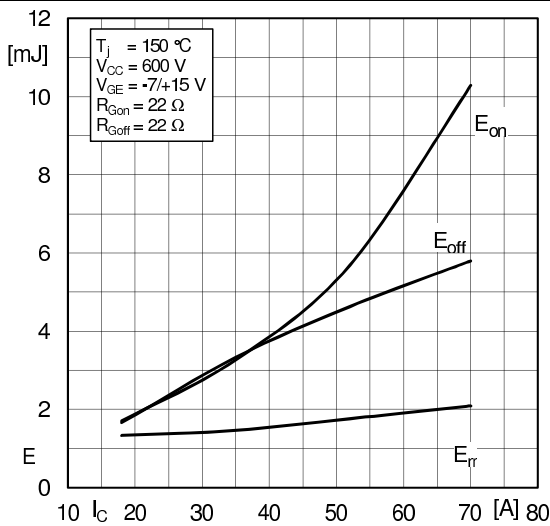


Fig. 3: Typ. turn-on /-off energy =  $f(I_C)$

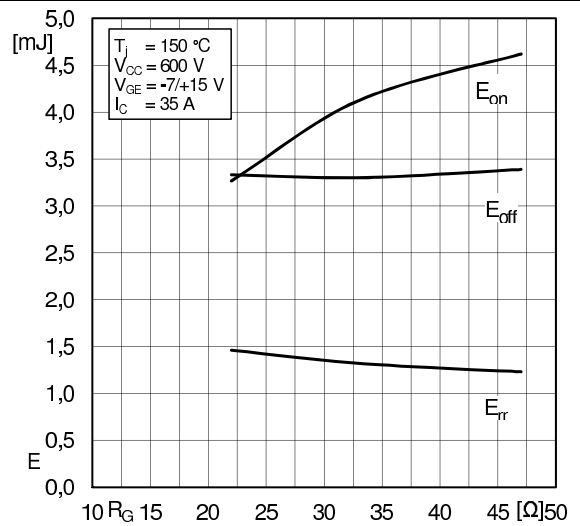


Fig. 4: Typ. turn-on /-off energy =  $f(R_G)$

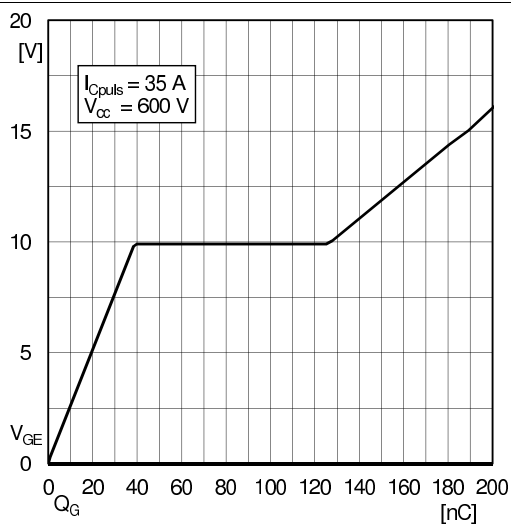


Fig. 6: Typ. gate charge characteristic




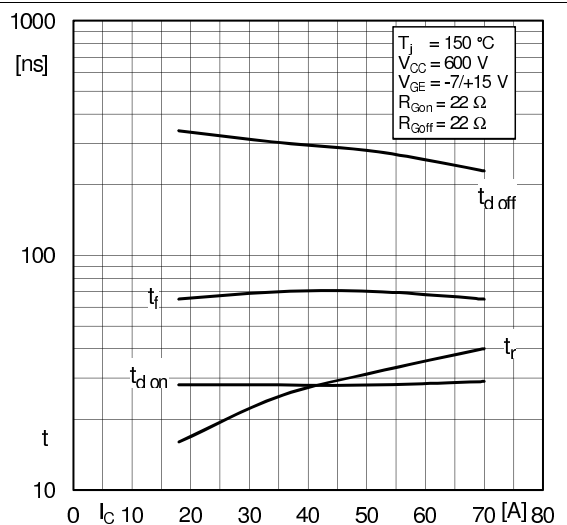


Fig. 7: Typ. switching times vs.  $I_C$

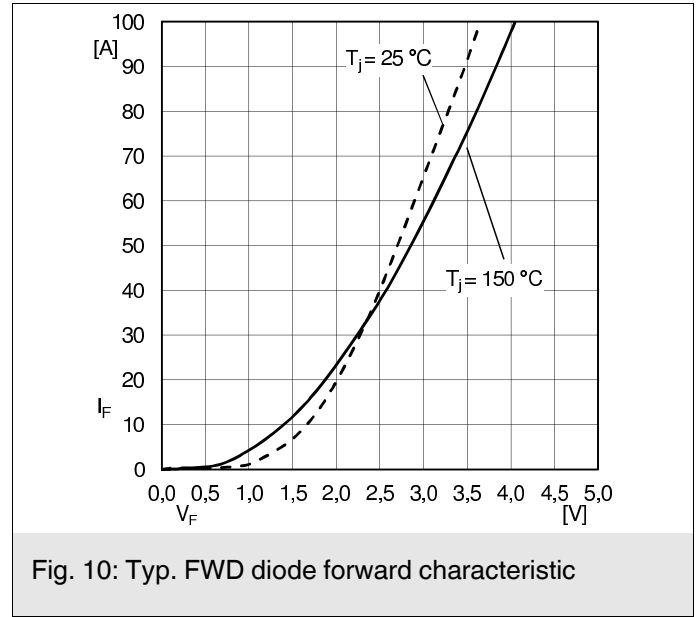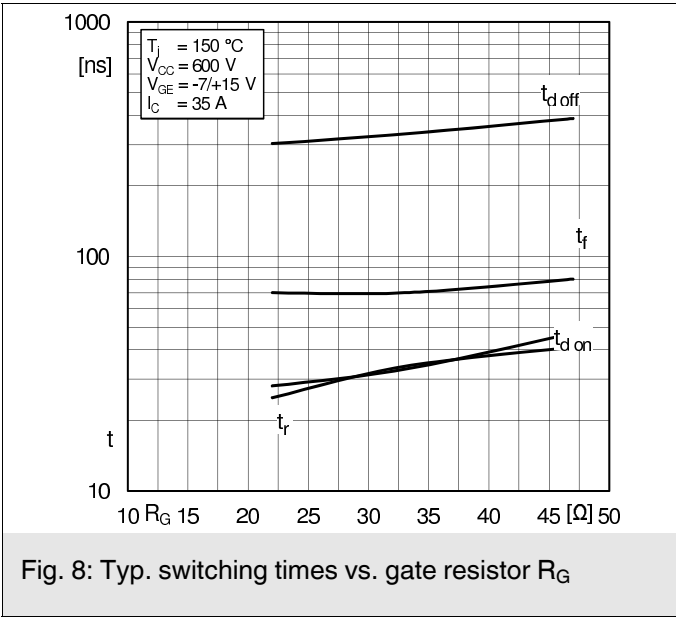


# SK 35 GAL 12T4

dimensions in mm  
tolerance system: ISO 2768-m

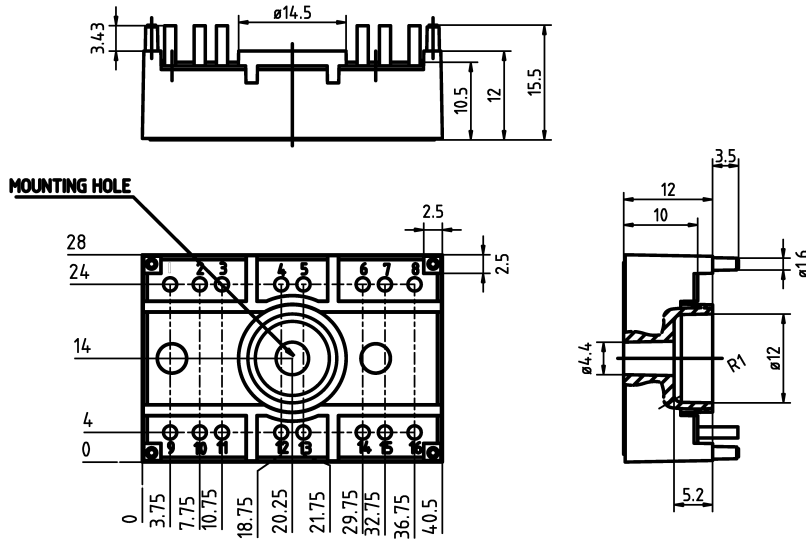

Suggested hole diameter, in the PCB, for solder pins and mounting plastic pins: 2mm

These documents are SEMIKRON properties. SEMIKRON reserves all copyrights.  
All copying and transmitting of this information requires written permission.  
For the case of industrial property rights, SEMIKRON reserves all rights

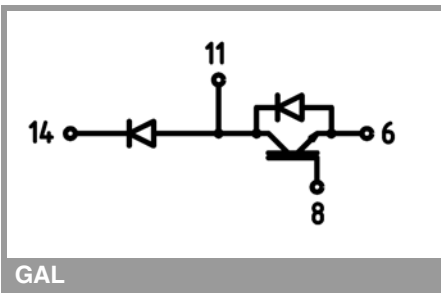

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IGBT Modules category](#):*

*Click to view products by [Semikron manufacturer](#):*

Other Similar products are found below :

[F3L100R07W2E3\\_B11](#) [F3L15R12W2H3\\_B27](#) [F3L400R07ME4\\_B22](#) [F3L400R12PT4\\_B26](#) [F4-100R12KS4](#) [F4-50R07W2H3\\_B51](#) [F4-75R12KS4\\_B11](#) [FB15R06W1E3](#) [FB20R06W1E3\\_B11](#) [FD1000R33HE3-K](#) [FD200R12KE3](#) [FD300R06KE3](#) [FD300R12KE3](#) [FD300R12KS4\\_B5](#) [FD400R12KE3](#) [FD400R33KF2C-K](#) [FD401R17KF6C\\_B2](#) [FD-DF80R12W1H3\\_B52](#) [FF100R12KS4](#) [FF1200R17KE3\\_B2](#) [FF150R12KE3G](#) [FF200R06KE3](#) [FF200R06YE3](#) [FF200R12KT3](#) [FF200R12KT3\\_E](#) [FF200R12KT4](#) [FF200R17KE3](#) [FF300R06KE3\\_B2](#) [FF300R12KE4\\_E](#) [FF300R12KS4HOSA1](#) [FF300R12ME4\\_B11](#) [FF300R12MS4](#) [FF300R17ME4](#) [FF450R12ME4P](#) [FF450R17IE4](#) [FF600R12IE4V](#) [FF600R12IP4V](#) [FF800R17KE3](#) [FF800R17KP4\\_B2](#) [FF900R12IE4V](#) [MIXA30W1200TED](#) [FP06R12W1T4\\_B3](#) [FP100R07N3E4](#) [FP100R07N3E4\\_B11](#) [FP10R06W1E3\\_B11](#) [FP10R12W1T4\\_B11](#) [FP10R12YT3](#) [FP10R12YT3\\_B4](#) [FP150R07N3E4](#) [FP15R12KT3](#)