


SKKT 15, SKKH 15

V_{RSM}	V_{RRM} V_{DRM}	$(dv/dt)_{cr}$	I_{TRMS} (maximum values for continuous operation)	
			24 A ¹⁾ ; 30 A ²⁾	24 A ¹⁾ ; 45 A ²⁾
V	V	V/ μ s	I_{TAV} (sin. 180; $T_{case} = 65$ °C)	
			17,5 A ²⁾	17,5 A ²⁾
500	400	500	SKKT 15/04 D	SKKH 15/04 D
700	600	500	SKKT 15/06 D	SKKH 15/06 D
900	800	500	SKKT 15/08 D	SKKH 15/08 D
1300	1200	1000	SKKT 15/12 E	SKKH 15/12 E
1500	1400	1000	SKKT 15/14 E	SKKH 15/14 E
1700	1600	1000	SKKT 15/16 E	SKKH 15/16 E

SEMIPACK® 0 Thyristor / Diode Modules

SKKT 15 SKKH 15

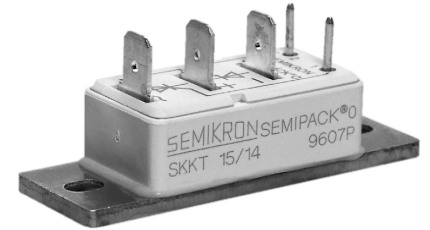

SKKT

SKKH

Symbol	Conditions	SKKT 15 SKKH 15	Units
I_{TAV}	sin. 180; $T_{case} = 65$ °C	17,5 ²⁾	A
	$T_{case} = 75$ °C	15 ¹⁾	A
I_D	B2/B6 $T_{amb} = 45$ °C; P 13A/100	14 / 17	A
I_{RMS}	W1/W3 $T_{amb} = 45$ °C; P 13A/100	21 / 3 x 12	A
I_{TSM}	$T_{vj} = 25$ °C; 10 ms	320	A
	$T_{vj} = 125$ °C; 10 ms	280	A
i^2t	$T_{vj} = 25$ °C; 8,3 ... 10 ms	510	A ² s
	$T_{vj} = 125$ °C; 8,3 ... 10 ms	390	A ² s
t_{gd}	$T_{vj} = 25$ °C $I_G = 1$ A		
	$di_G/dt = 1$ A/ μ s	1	μ s
t_{gr}	$V_D = 0,67 \cdot V_{DRM}$	1	μ s
$(di/dt)_{cr}$	$T_{vj} = 125$ °C	100	A/ μ s
t_q	$T_{vj} = 125$ °C	typ. 80	μ s
I_H	$T_{vj} = 25$ °C; typ./max.	80 / 150	mA
I_L	$T_{vj} = 25$ °C; $R_G = 33$ Ω ; typ./max.	150 / 300	mA
V_T	$T_{vj} = 25$ °C; $I_T = 75$ A	max. 2,45	V
$V_{T(TO)}$	$T_{vj} = 125$ °C	1,1	V
r_T	$T_{vj} = 125$ °C	20	m Ω
I_{DD} ; I_{RD}	$T_{vj} = 125$ °C; $V_{RD} = V_{RRM}$ $V_{DD} = V_{DRM}$	max. 8	mA
V_{GT}	$T_{vj} = 25$ °C; d.c.	3	V
I_{GT}	$T_{vj} = 25$ °C; d.c.	100	mA
V_{GD}	$T_{vj} = 125$ °C; d.c.	0,25	V
I_{GD}	$T_{vj} = 125$ °C; d.c.	5	mA
R_{thjc}	cont. } per thyristor / sin. 180 } per module rec. 120 }	1,6 / 0,8 1,7 / 0,9 1,8 / 0,9	$^{\circ}$ C/W $^{\circ}$ C/W $^{\circ}$ C/W
R_{thch}		0,2 / 0,1	$^{\circ}$ C/W
T_{vj}		- 40 ... + 125	$^{\circ}$ C
T_{stg}		- 40 ... + 125	$^{\circ}$ C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s/1 min	3600 / 3000	V~
M_1	Case to heatsink; SI (US) units	1,5 (13 lb. in.) \pm 15 % ³⁾	Nm
a		5 - 9,81	m/s ²
w	approx.	50	g
Case	→ page B 1 – 30	SKKT 15: A 1 SKKH 15: A 2	

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532

Typical Applications

- DC motor control (e.g. for machine tools)
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

1) Using tin plated connectors with flexible leads of 6 mm² for the main terminals

2) Flexible leads of 6 mm² soldered to the main terminals

3) See the assembly instructions

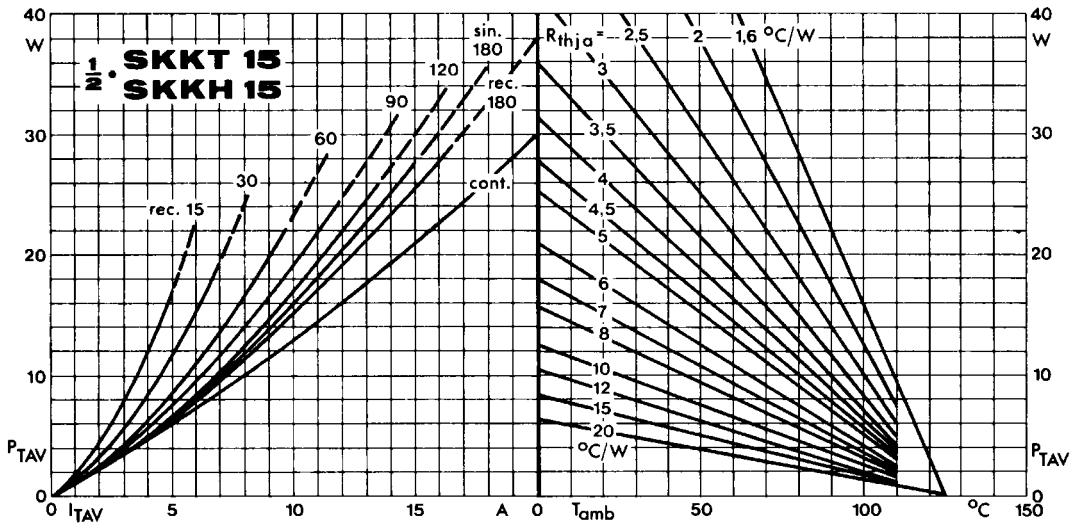


Fig. 1 Power dissipation per thyristor vs. on-state current and ambient temperature

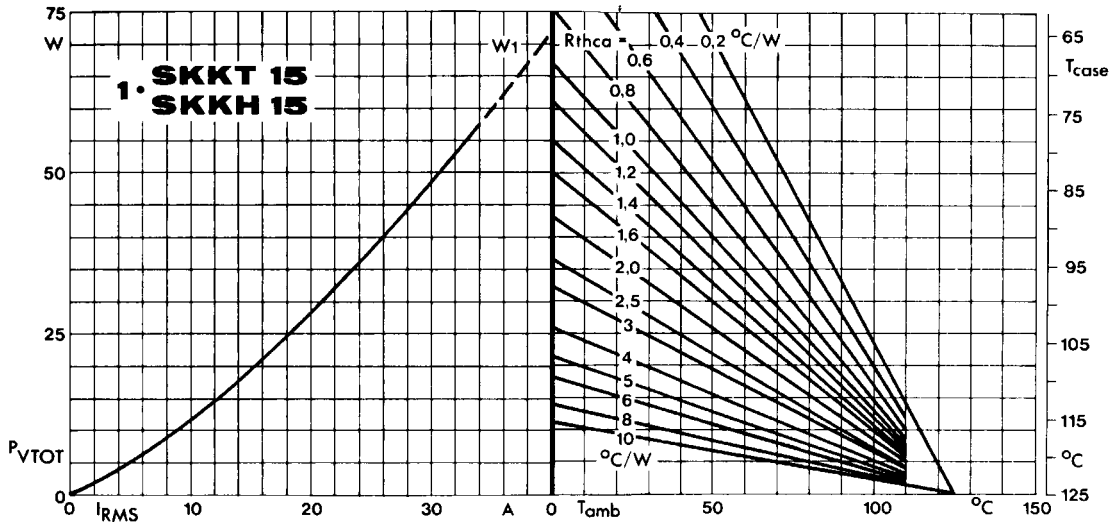


Fig. 2 Power dissipation per module vs. rms current and case temperature

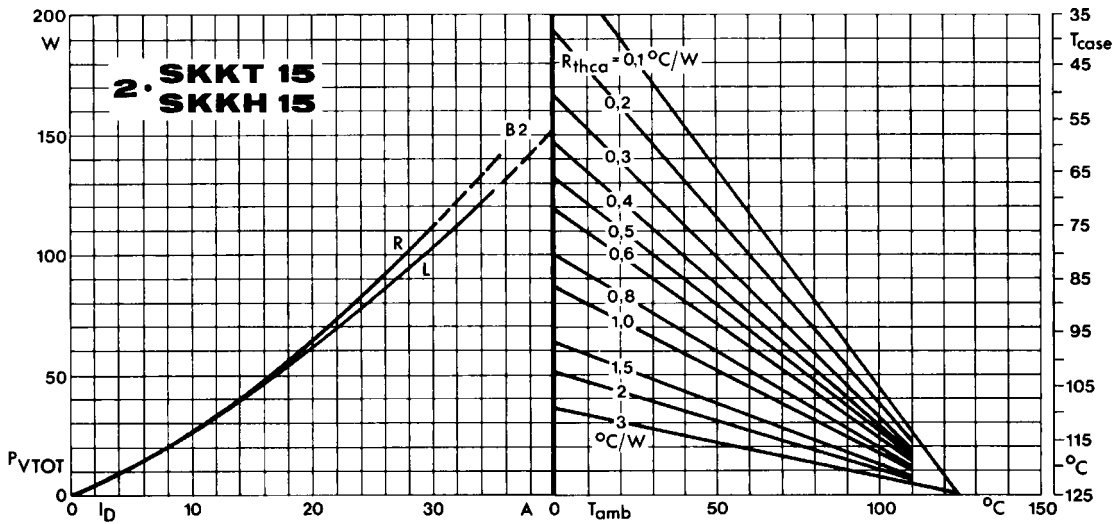


Fig. 3 Power dissipation of two modules vs. direct current and case temperature

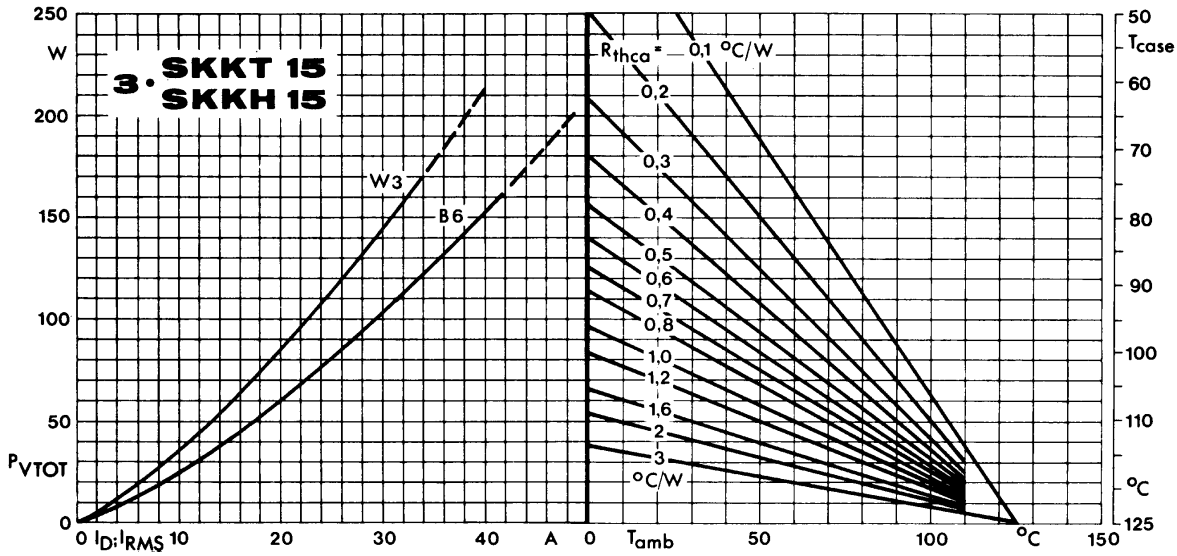


Fig. 4 Power dissipation of three modules vs. direct and rms current and case temperature

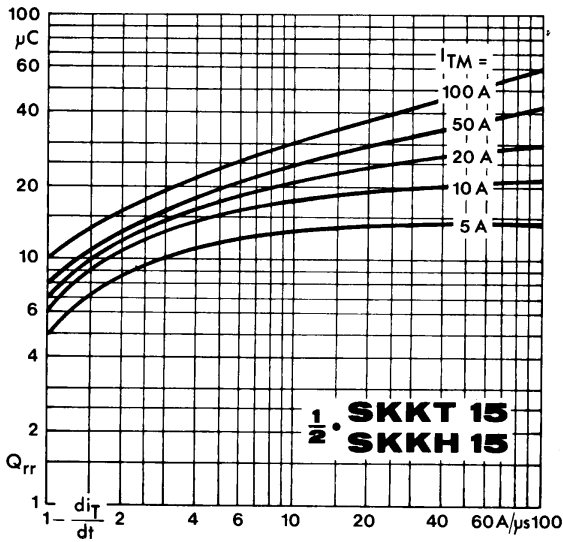


Fig. 5 Recovered charge vs. current decrease

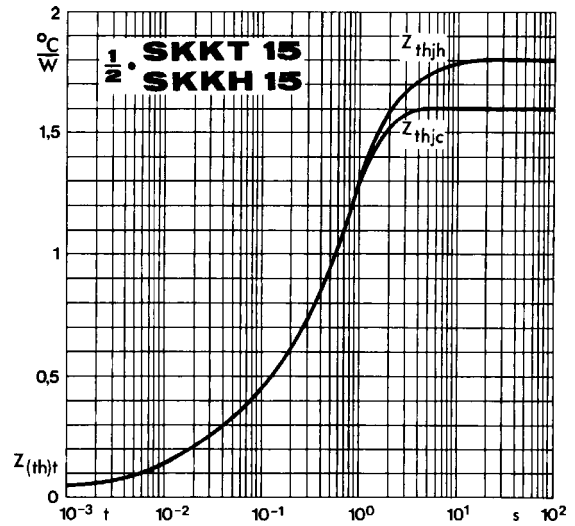


Fig. 6 Transient thermal impedance vs. time

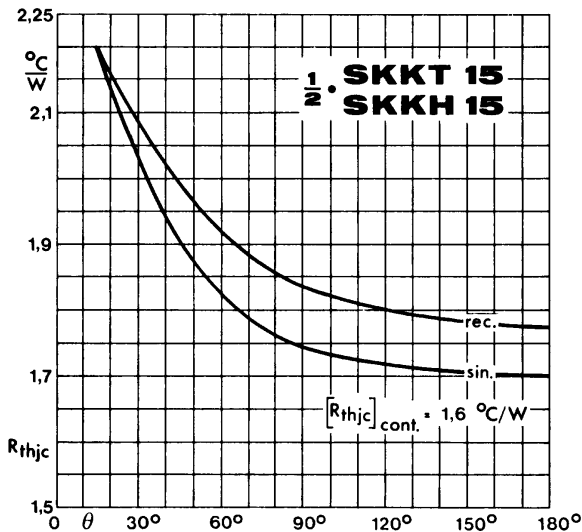


Fig. 7 Thermal resistance vs. conduction angle

I:\Marketin\FRAMEDAT\datb\B01-Semipack\SKKTH15.fm

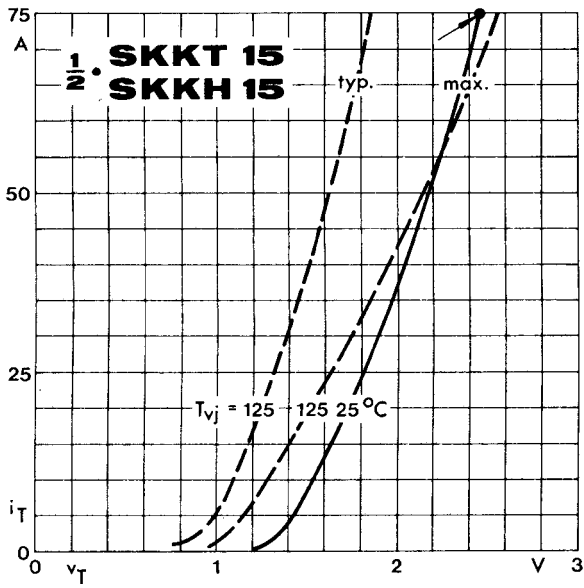


Fig. 8 On-state characteristics

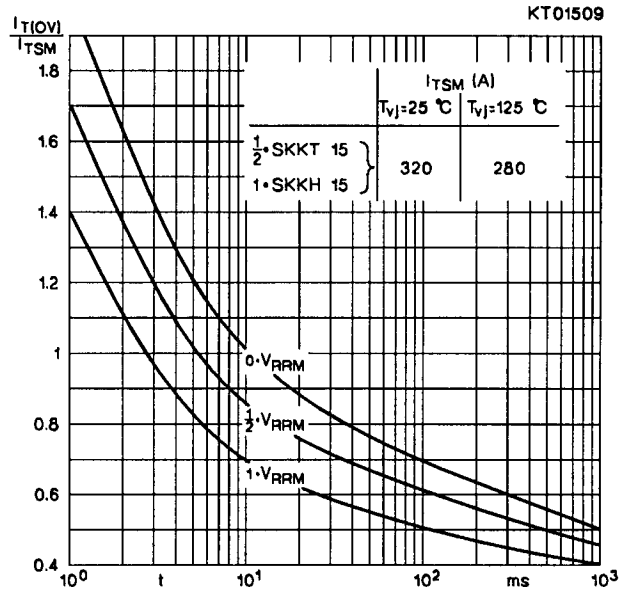


Fig. 9 Surge overload current vs. time

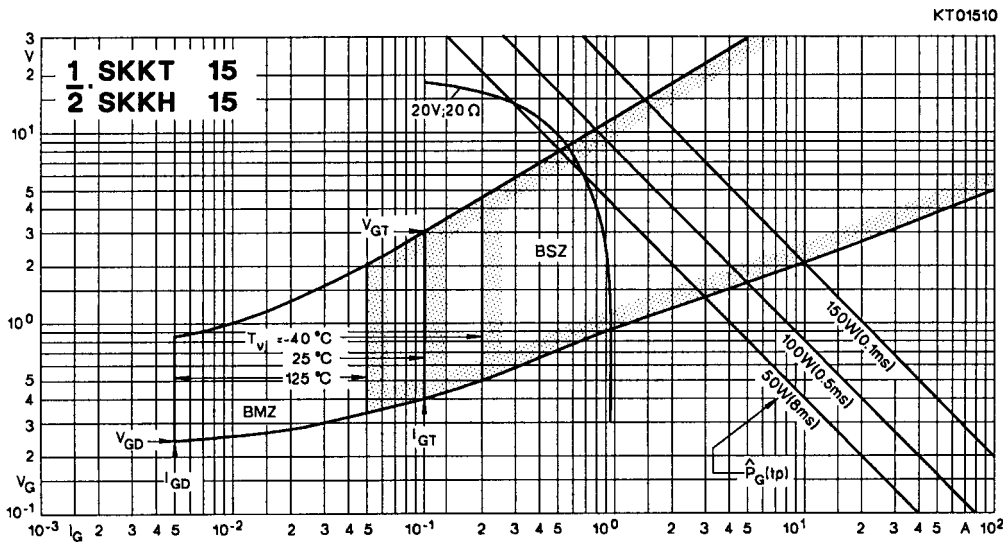


Fig. 10 Gate trigger characteristics

<p>SKKT 15 Case A 1</p> <p>SEMIPACK® 0</p> <p>Dimensions in mm</p>	<p>SKKH 15 Case A 2</p> <p>SKKD 15 Case A 3</p> <p>SKKE 15 Case A 4</p>
---	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SCR Modules](#) category:

Click to view products by [Semikron](#) manufacturer:

Other Similar products are found below :

[DT430N22KOF](#) [DT61N16KOF-K](#) [T1401N42TOH](#) [T1851N60TOH](#) [T390N14TOF](#) [T420N12TOF](#) [T470N16TOF](#) [T640N16TOF](#)
[T901N36TOF](#) [TD142N16KOF](#) [TD162N16KOF-A](#) [TD330N16AOF](#) [TZ310N20KOF](#) [TZ425N12KOF](#) [TZ500N12KOF](#) [T300N14TOF](#)
[T3710N06TOF](#) [VT](#) [T390N16TOF](#) [T420N16TOF](#) [T460N24TOF](#) [T501N70TOH](#) [T560N16TOF](#) [T590N16TOF](#) [T640N14TOF](#) [TD250N14KOF](#)
[TD570N16KOF](#) [TT600N16KOF](#) [TZ240N36KOF](#) [TT210N12KOF](#) [NTE5710](#) [TD180N16KOF](#) [TT240N28KOF](#) [TZ425N14KOF](#)
[T1081N60TOH](#) [TT61N08KOF](#) [TD251N18KOF](#) [TZ240N34KOF](#) [TT162N08KOF](#) [TD285N16KOF](#) [TT180N12KOF](#) [T2001N34TOF](#)
[TT122N22KOF](#) [TD140N22KOF](#) [MDMA200P1600SA](#) [TT180N16KOF](#) [VS-ST180C14C0L](#) [T1080N02TOF](#) [TD320N16SOF](#) [T360N22TOF](#)
[TZ810N22KOF](#)