



Thyristor Modules

SKKT 273/18 E

Features


- Industrial standard package
- Electrically insulated base plate
- Heat transfer through aluminum oxide ceramic insulated metal base plate
- Chip soldered on direct copper bonded Al₂O₃ ceramic
- Thyristor with center gate
- UL recognition applied for file no. E63532

Typical Applications*

- DC motor control (e. g. for machine tools)
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

Absolute Maximum Ratings		Values	Unit
Symbol	Conditions		
Chip			
I _{T(AV)}	sinus 180°	T _c = 85 °C	274
		T _c = 100 °C	204
I _{TSM}	10 ms	T _j = 25 °C	9000
		T _j = 130 °C	8000
i ² t		T _j = 25 °C	405000
		T _j = 130 °C	320000
V _{RSM}			1900
V _{RRM}			1800
V _{DRM}			1800
(di/dt) _{cr}	T _j = 130 °C		130
(dv/dt) _{cr}	T _j = 130 °C		1000
T _j			-40 ... 130 °C
Module			
T _{stg}			-40 ... 125 °C
V _{isol}	a.c.; 50 Hz; r.m.s.	1 min	3000 V
		1 s	3600 V

Characteristics		min.	typ.	max.	Unit
Symbol	Conditions				
Chip					
V _T	T _j = 25 °C, I _T = 750 A			1.6	V
V _{T(TO)}	T _j = 130 °C			0.9	V
r _T	T _j = 130 °C			0.92	mΩ
I _{DD} ;I _{RD}	T _j = 130 °C, V _{DD} = V _{DRM} ; V _{RD} = V _{RRM}			100	mA
t _{gd}	T _j = 25 °C, I _G = 1 A, dI _G /dt = 1 A/μs		1		μs
t _{gr}	V _D = 0.67 * V _{DRM}		2		μs
t _q	T _j = 130 °C		150		μs
I _H	T _j = 25 °C		150	500	mA
I _L	T _j = 25 °C, R _G = 33 Ω		300	2000	mA
V _{GT}	T _j = 25 °C, d.c.	2			V
I _{GT}	T _j = 25 °C, d.c.	150			mA
V _{GD}	T _j = 130 °C, d.c.		0.25		V
I _{GD}	T _j = 130 °C, d.c.		10		mA
R _{th(j-c)}	cont.	per chip		0.104	K/W
		per module		0.052	K/W
R _{th(j-c)}	sin. 180°	per chip		0.108	K/W
		per module		0.054	K/W
R _{th(j-c)}	rec. 120°	per chip		0.122	K/W
		per module		0.061	K/W
Module					
R _{th(c-s)}	chip		0.08	0.08	K/W
	module		0.04		K/W
M _s	to heatsink M5	4.25		5.75	Nm
M _t	to heatsink M8	7.65		10.34	Nm
a			5 * 9,81		m/s ²
w			410		g

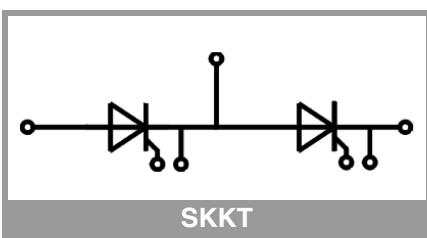

SKKT 273/18 E

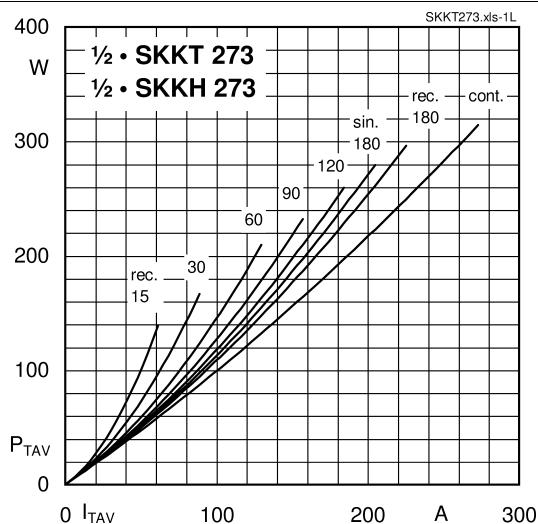


Fig. 1L: Power dissipation per thyristor/diode vs. on-state current

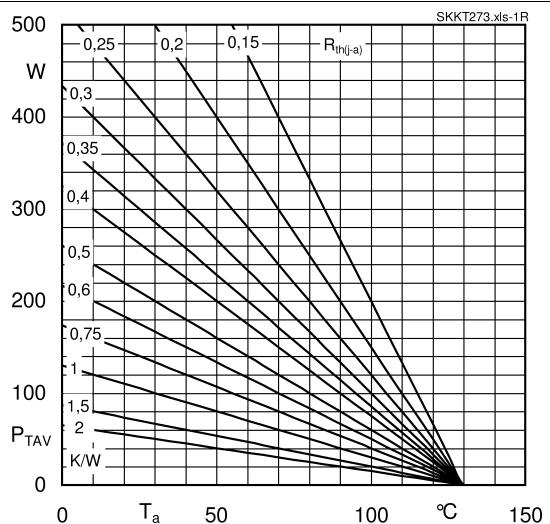


Fig. 1R: Power dissipation per thyristor/diode vs. ambient temperature

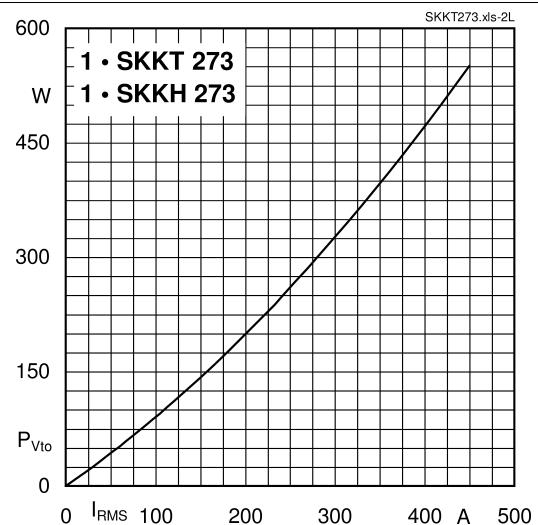


Fig. 2L: Power dissipation of one module vs. rms current

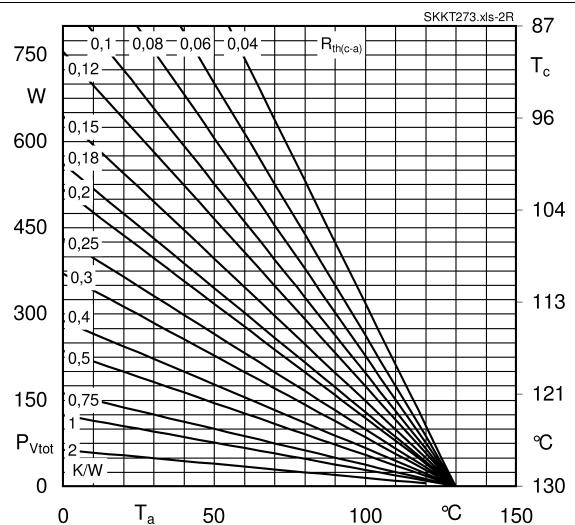


Fig. 2R: Power dissipation of one module vs. case temperature

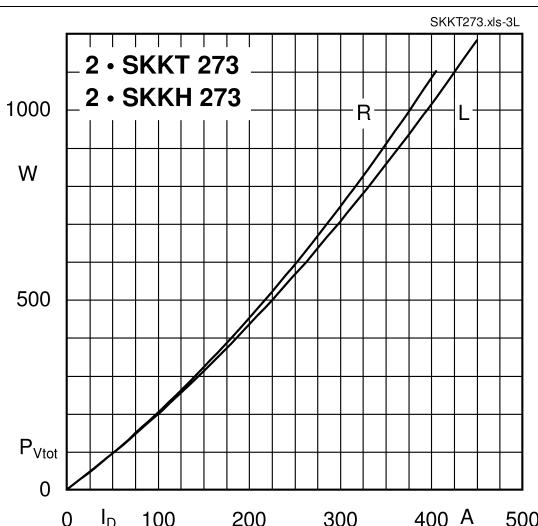


Fig. 3L: Power dissipation of two modules vs. direct current

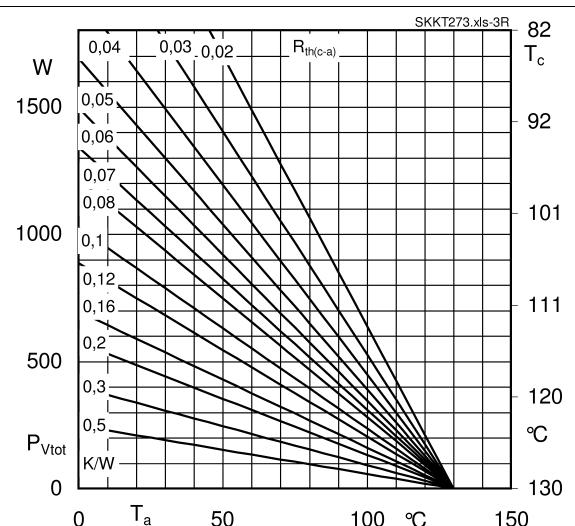


Fig. 3R: Power dissipation of two modules vs. case temperature

SKKT 273/18 E

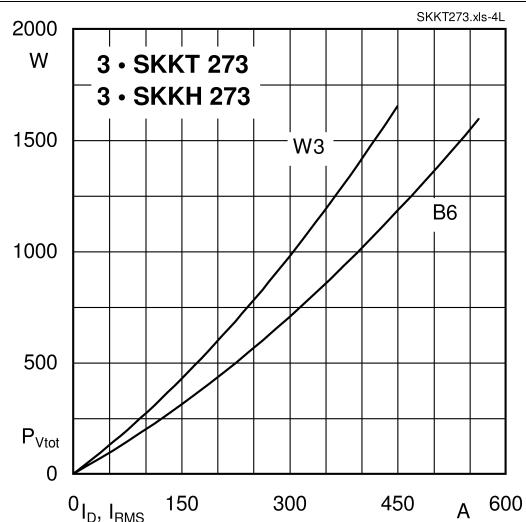


Fig. 4L: Power dissipation of three modules vs. direct and rms current

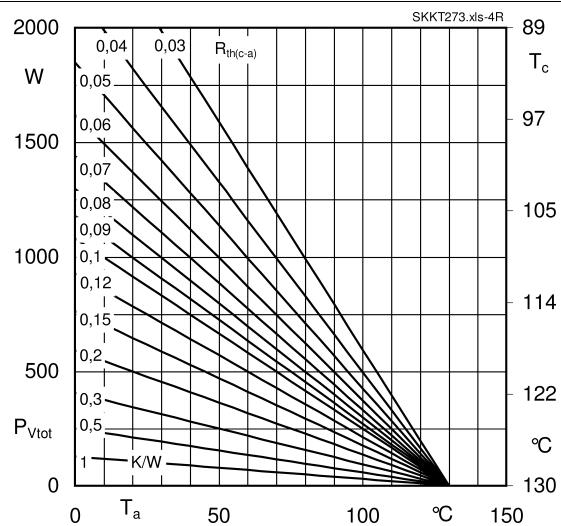


Fig. 4R: Power dissipation of three modules vs. case temperature

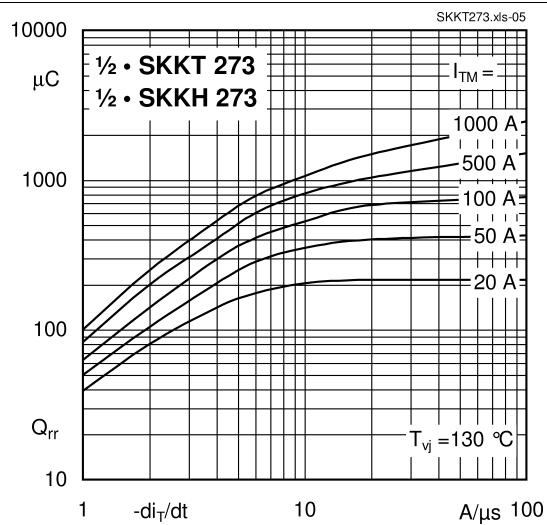


Fig. 5: Recovered charge vs. current decrease

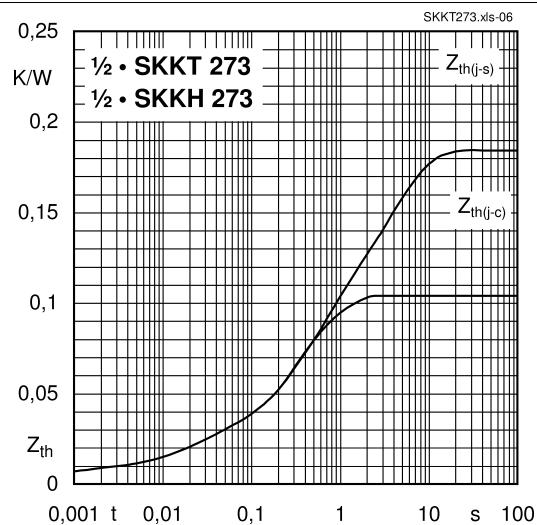


Fig. 6: Transient thermal impedance vs. time

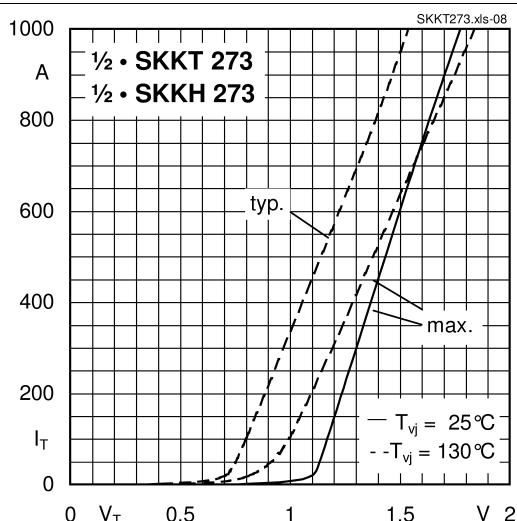


Fig. 7: On-state characteristics

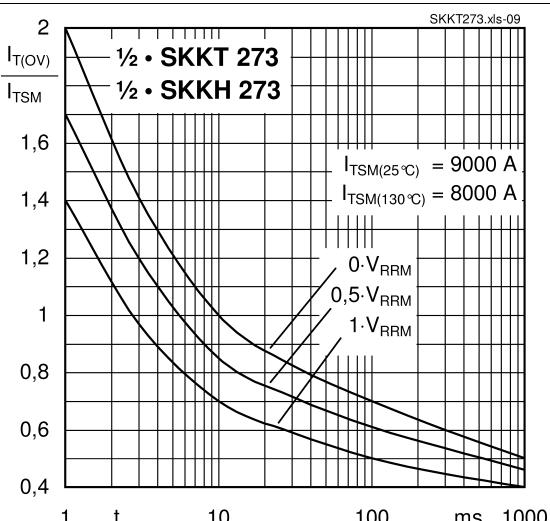


Fig. 8: Surge overload current vs. time

SKKT 273/18 E



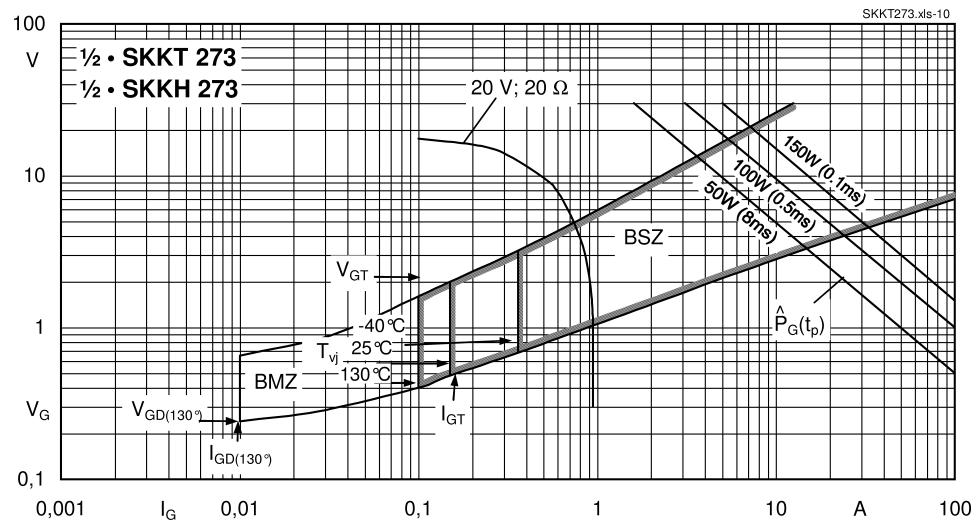


Fig. 9: Gate trigger characteristics

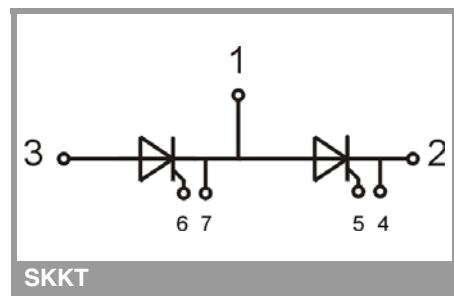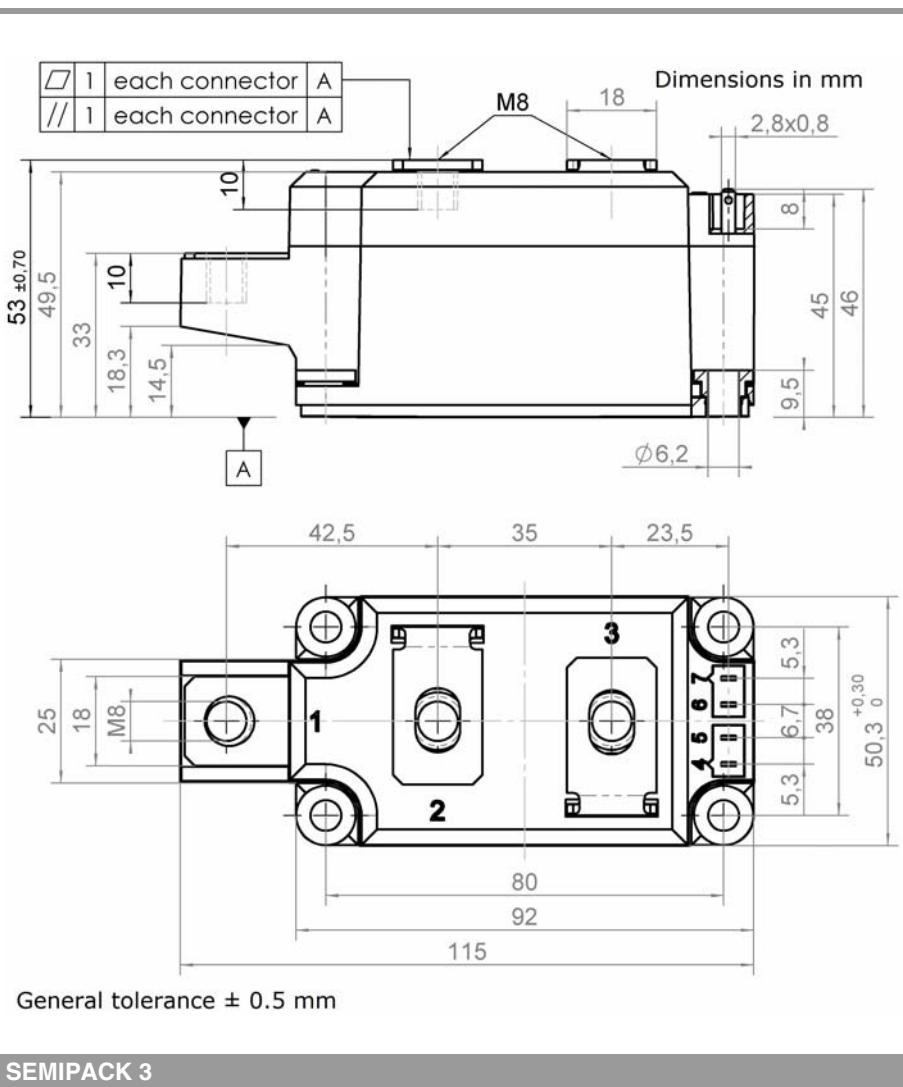

SEMIPACK 3

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for SCR Modules category:

Click to view products by Semikron manufacturer:

Other Similar products are found below :

[DT430N22KOF](#) [DT61N16KOF-K](#) [T1401N42TOH](#) [T1851N60TOH](#) [T390N14TOF](#) [T420N12TOF](#) [T470N16TOF](#) [T640N16TOF](#)
[T901N36TOF](#) [TD142N16KOF](#) [TD162N16KOF-A](#) [TD330N16AOF](#) [TZ310N20KOF](#) [TZ425N12KOF](#) [TZ500N12KOF](#) [T300N14TOF](#)
[T3710N06TOF VT](#) [T390N16TOF](#) [T420N16TOF](#) [T460N24TOF](#) [T501N70TOH](#) [T560N16TOF](#) [T590N16TOF](#) [T640N14TOF](#) [TD250N14KOF](#)
[TD570N16KOF](#) [TT600N16KOF](#) [TZ240N36KOF](#) [TT210N12KOF](#) [NTE5710](#) [TD180N16KOF](#) [TT240N28KOF](#) [TZ425N14KOF](#)
[T1081N60TOH](#) [TT61N08KOF](#) [TD251N18KOF](#) [TZ240N34KOF](#) [TT162N08KOF](#) [TD285N16KOF](#) [TT180N12KOF](#) [T2001N34TOF](#)
[TT122N22KOF](#) [TD140N22KOF](#) [MDMA200P1600SA](#) [TT180N16KOF](#) [VS-ST180C14C0L](#) [T1080N02TOF](#) [TD320N16SOF](#) [T360N22TOF](#)
[TZ810N22KOF](#)