

Cable Multicore

pro-POWER

RoHS
Compliant



Product Description:

Application	For communication and signal control systems
Reference Standard	Customer's sample spec.and the general standard
Multi-construction	Multi-core coaxial

Cable Construction:

6 coaxial video cable spec	
Conductor 1	Tinned Copper
Construction	T0.10 ±0.005 × 7
Standard Dia. (mm)	0.3
Insulation 1	Solid PE
Thickness (mm)	0.75
Insulation Dia. (mm)	1.8 ±0.1
Insulation Colour	Natural
Braiding 1	Bare Copper
Construction (mm)	0.12 ±0.003 × 16 × 4
Coverage	80%
Inner jacket 1	PVC
Thickness(mm)	0.3
Dia.(±0.15mm)	2.8
Jacket Colour	Grey; Black; Red; Green; Blue; White
4 Core Audio cable spec	
Conductor 2	Tinned Copper
Construction	T0.10 ±0.005 × 7
Standard Dia. (mm)	0.3
Insulation 2	Solid PE
Thickness (mm)	0.37
Insulation Dia. (mm)	1.05 ±0.1 × 4C
Insulation Colour	Orange; White; Transparent; Grey


Product Description:

Screening 2	Bare Copper Spiral
Construction (mm)	0.12 ±0.005 × 32
Mylar tape Spiral	Coverage ≥115%
Inner jacket 2	PVC
Thickness (mm)	0.6
Dia.(±0.15mm)	4.2
Jacket Colour	Ivory
2 Data Bus coaxial cable spec	
Conductor 3	Tinned Copper
Construction	T0.10 ±0.005 × 7
Standard Dia. (mm)	0.3
Insulation 3	Solid PE
Thickness (mm)	0.37
Insulation Dia. (mm)	1.05 ±0.1
Insulation Colour	Yellow; Green
Screening 3	Bare Copper Spiral
Construction (mm)	0.12 ±0.005 × 32
Inner jacket 3	PVC
Thickness (mm)	0.4
Dia.(±0.15mm)	2.1 × 2
Jacket Colour	Yellow
Hook Up spec	
Conductor 4	Bare Copper
Construction	0.10 ±0.005 × 18
Standard Dia. (mm)	0.49
Insulation 4	PVC
Thickness (mm)	0.28
Insulation Dia. (mm)	1.05 ±0.05
Insulation Colour:	Brown

Electrical Characteristics:

Max. DC Resistance at 20°C(Ω/Km)	
Conductor	330
Screen	26
Insulation DC Resistance at 20°C(MΩ*KM)	>500
Rated Temperature(°C)	-20 to +70
Rated Voltage(V)	30
Capacitance(pF/m)	68 ±5pF/m
Velocity of propagation	66% min
Characteristic impedance	75 ±5Ω
Attenuation at 20°C (dB/100m) (+/-10%)	
50MHz	19.6
100MHz	22.8

Design:

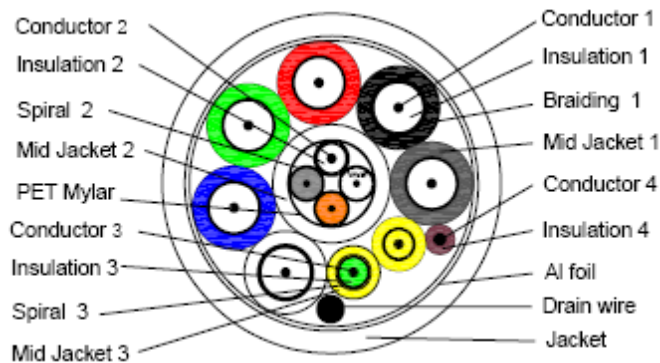

Part Number Table

Description	Part Number
Multicore, 10 Core, 25m, 30V, Grey	PP000655

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Power manufacturer](#).

Other Similar products are found below :

[0301CV100W](#) [04JSBLACK](#) [06JSBLACK](#) [08450046010](#) [08450056010](#) [08450066010](#)
[08450166010](#) [08450236010](#) [08450256010](#) [08JSBLACK](#) [10026B](#) [10026BK](#) [10026G](#)
[10026R](#) [10026TB](#) [10026TBK](#) [10026TG](#) [10026TR](#) [10026TW](#) [10026W](#) [10030B](#)
[10030BK](#) [10030G](#) [10030O](#) [10030R](#)