


TWN4 MULTITECH 2 BLE

RFID READER/WRITER FOR LF, HF, NFC, BLE



TWN4 MultiTech 2 BLE
PCB top view

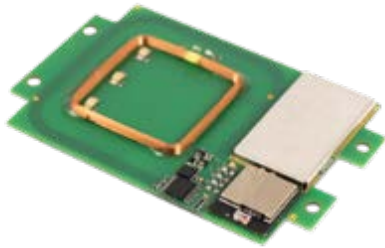

Desktop version
(inlay customizable)

Elatec's TWN4 family of transponder readers and writers allows users to read and write to almost any 125 kHz, 134.2 kHz and 13.56 MHz tags and/or labels. It supports all major transponders from various suppliers like ATMEL, EM, ST, NXP, TI, HID etc. and ISO standards like ISO14443A/B (T=CL), ISO15693, ISO18092 / ECMA-340 (NFC).

The new TWN4 MultiTech 2 BLE reader has integrated RFID (LF & HF) and Bluetooth Low Energy (BLE), which is supported by mobile phones with Android version 4.3 or greater, iPhone 4S or greater and PCs with Windows (new Bluetooth hardware integrated). The app on the reader communicates with the BLE module with easy commands and has direct enhancement to the GATT structure, which gives you the flexibility to write your custom apps.

Special features:

- + Powerful SDK for writing Apps which are executed directly on the reader
- + Firmware update in the field possible
- + Onboard 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Direct chip-commands support
- + Two onboard SAM sockets (Secure Access Module)
- + CCID and PC/SC 2.01
- + 4 GPIOs
- + Bluetooth V4.1, upgradeable to V4.2, API, flexible GATT structure up to 8 connections simultaneous, AES128 supported
- + supports quick centralized (re)configuration over network and over wireless interface with TWN4 CONFIG Card
- + 3D construction data (STEP) available on request



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC

TECHNICAL DATA

FREQUENCY	125 kHz/134.2 kHz (LF) / 13.56 MHz (HF) / 2402 MHz - 2480 MHz (BT)
ANTENNA	Integrated
HOUSING	Material: ABS UL94-V0, color: black or white
DIMENSIONS (L X W X H)	Desktop Reader: 88 x 56 x 18 mm / 3.5 x 2.2 x 0.7 inch OEM Board: 76mm x 49mm x 9mm / 3.0inch x 1.9inch x 0.4inch
POWER SUPPLY	4.3 V - 5.5 V via USB or RS-232; RS232 requires 5 V external power supply; via connector CNB 3.3 V +/- 5%
CURRENT CONSUMPTION	RF field on: 120 mA typically + 16 mA (BT) / Sleep: 500 µA typ. / Cyclic Operation: TBD
TEMPERATURE RANGE	Desktop, Operating: -25 °C up to +70 °C (-13 °F up to +158 °F) Desktop, Storage: -45 °C up to +75 °C (-49 °F up to +167 °F) PCB, Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) PCB, Storage: -45 °C up to +85 °C (-49 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
READ- / WRITE DISTANCE	LF and HF: Up to 100 mm / 4 inch, depending on environment and transponder BT: up to several meters/feet (configurable, up to +8 dBm power)
TRANSMISSION SPEED	Host: USB Full speed (12 Mbit/s), RS-232 up to 115.200 baud; HF Air: up to 848 kbit/s, BT Air: up to 100 kbit/s
MODES OF OPERATION	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
BLUETOOTH LOW ENERGY	Bluetooth V4.1, software upgradable to V4.2; easy to integrate in reader App with commands, optional BGAPI protocol; Standards as GAP, SM, L2CAP, ATT; predefined GATT structure; up to 8 connections; AES128 support
MTBF	500,000 hours
WEIGHT	Approx. 20 g (without housing)
SUPPORTED TRANSPONDERS (STANDARD)	<u>ISO14443A:</u> LEGIC Advant ¹⁾ , MIFARE Classic 1k & 4k EV1 ²⁾ , MIFARE Classic, MIFARE Mini, MIFARE DESFire EV1, MIFARE DESFire EV2 ²⁾ , MIFARE Plus S, X, MIFARE Pro X ³⁾ , MIFARE Smart MX ³⁾ , MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1, NTAG2xx, PayPass ³⁾ , SLE44R35, SLE66Rxx (my-d move) ³⁾ , Topaz <u>ISO14443B:</u> Calypso ³⁾ , Calypso Innovatron protocol ³⁾ , CEPAS ³⁾ , HID iCLASS ¹⁾ , Moneo ³⁾ , Pico Pass ⁴⁾ , SRI4K, SRIX4K, SRI512, SRT512 <u>ISO18092 ECMA-340:</u> NFC Forum Tag 1-5, NFC Peer-to-Peer, Sony FeliCa ⁵⁾ , NFC Active and passive communication mode <u>ISO15693:</u> EM4x33 ³⁾ , EM4x35 ³⁾ , HID iCLASS ¹⁾ , HID iCLASS SE/SR ¹⁾ , ICODE SLI, LEGIC Advant ¹⁾ , M24LR16/64, MB89R118/119, SRF55Vxx (my-d vicinity) ³⁾ , Tag-it, PicoPass ⁴⁾ <u>125 kHz, 134.2 kHz:</u> AWID, Cardax, CASI-RUSCO, Deister ⁶⁾ , EM4100, 4102, 4200 ⁷⁾ , EM4050, 4150, 4450, 4550, EM4305 ⁸⁾ , FDX-B, EM4105, HITAG 1 ⁹⁾ , HITAG 2 ⁹⁾ , HITAG S ⁹⁾ , ICT ⁸⁾ , IDTECK, Isonas ⁸⁾ , Keri, Miro, Nedap ⁶⁾ , PAC, Pyramid, Q5, T5557, T5567, T5577, TIRIS/HDX, TITAN (EM4050), UNIQUE, ZODIAC
SUPPORTED TRANSPONDERS (VERSION P)	All Standard Transponder, Cotag, G-Prox ⁶⁾ , HID DuoProx II, HID ISO Prox II, HID Micro Prox, HID ProxKey III, HID Prox, HID Prox II, Indala, ioProx, Nexwatch
SUPPORTED TRANSPONDERS (VERSION PI)	Requires external TWN4 SIO Card, All Standard Transponder, All Version P Transponder, HID iCLASS ¹⁰⁾ , HID iCLASS SE/SR/SEOS(CSN and Facility Code/PAC) ¹⁰⁾ , HID iCLASS Elite & SE Elite
PERIPHERAL INTERFACES	USB, RS232, TTL serial (logic level 3.3 V, CMOS, 5 V tolerant), I ² C, 4 GPIOs, Clock/Data, Wiegand, 1-Wire ⁸⁾

OS SUPPORT	Windows XP, Vista, Embedded CE [®] , 7 (32-/64-bit), 8, 8.1, 10, Linux, Android [®] , iOS [®] , MAC OS X [®]																														
CERTIFICATIONS	RoHS-II compliant, CE, FCC Single Modular Approval, RED, ACA, IC																														
ORDER CODE(S)	<table border="0"> <tr><td>T4BO-F7</td><td>OEM Board</td></tr> <tr><td>T4BT-FB2BEL7</td><td>USB Black</td></tr> <tr><td>T4BT-FB2WEL7</td><td>USB White</td></tr> <tr><td>T4BT-FR2BEL7</td><td>RS232 Black</td></tr> <tr><td>T4RT-FB2WEL7</td><td>RS232 White</td></tr> <tr><td>T4BO-F7-P</td><td>OEM Board Version P</td></tr> <tr><td>T4BT-FB2BEL7-P</td><td>USB Version P Black</td></tr> <tr><td>T4BT-FB2WEL7-P</td><td>USB Version P White</td></tr> <tr><td>T4BT-FR2BEL7-P</td><td>RS232 Version P Black</td></tr> <tr><td>T4RT-FB2WEL7-P</td><td>RS232 Version P White</td></tr> <tr><td>T4BO-F7-PI</td><td>OEM Board Version PI</td></tr> <tr><td>T4BT-FB2BEL7-PI</td><td>USB Version PI Black</td></tr> <tr><td>T4BT-FB2WEL7-PI</td><td>USB Version PI White</td></tr> <tr><td>T4BT-FR2BEL7-PI</td><td>RS232 Version PI Black</td></tr> <tr><td>T4RT-FB2WEL7-PI</td><td>RS232 Version PI White</td></tr> </table>	T4BO-F7	OEM Board	T4BT-FB2BEL7	USB Black	T4BT-FB2WEL7	USB White	T4BT-FR2BEL7	RS232 Black	T4RT-FB2WEL7	RS232 White	T4BO-F7-P	OEM Board Version P	T4BT-FB2BEL7-P	USB Version P Black	T4BT-FB2WEL7-P	USB Version P White	T4BT-FR2BEL7-P	RS232 Version P Black	T4RT-FB2WEL7-P	RS232 Version P White	T4BO-F7-PI	OEM Board Version PI	T4BT-FB2BEL7-PI	USB Version PI Black	T4BT-FB2WEL7-PI	USB Version PI White	T4BT-FR2BEL7-PI	RS232 Version PI Black	T4RT-FB2WEL7-PI	RS232 Version PI White
T4BO-F7	OEM Board																														
T4BT-FB2BEL7	USB Black																														
T4BT-FB2WEL7	USB White																														
T4BT-FR2BEL7	RS232 Black																														
T4RT-FB2WEL7	RS232 White																														
T4BO-F7-P	OEM Board Version P																														
T4BT-FB2BEL7-P	USB Version P Black																														
T4BT-FB2WEL7-P	USB Version P White																														
T4BT-FR2BEL7-P	RS232 Version P Black																														
T4RT-FB2WEL7-P	RS232 Version P White																														
T4BO-F7-PI	OEM Board Version PI																														
T4BT-FB2BEL7-PI	USB Version PI Black																														
T4BT-FB2WEL7-PI	USB Version PI White																														
T4BT-FR2BEL7-PI	RS232 Version PI Black																														
T4RT-FB2WEL7-PI	RS232 Version PI White																														

¹UID only ²r/w enhanced security features on request ³r/w in direct chip command mode ⁴UID only, read/write on request ⁵UID + r/w public area ⁶Hash value only ⁷Only emulation of 4100, 4102 ⁸On request ⁹Without encryption ¹⁰UID + PAC (CSN & Facility Code), r/w on request ¹¹In preparation

ACCESSORIES

HOLDER	HKSI-B: Snap-In Holder black HKSI-W: Snap-In Holder white HKBR-B: Bracket Holder black HKBR-W: Bracket Holder white
POWER SUPPLY	PWA-EU: Power Supply (EU) PWA-US: Power Supply (US) PWA-UK: Power Supply (UK) PWA-AU: Power Supply (AU) PWA-JP: Power Supply (JP)
CABLES	CAB-B2: USB cable type A 200 cm / 78.74 inch CAB-B3: USB cable type A 12 cm / 4.72 inch CAB-B4: USB cable type A 45 cm / 17.72 inch CAB-B7: USB cable type A 120 cm / 47.24 inch CAB-M1: USB cable mini 12 cm / 4.72 inch CAB-M2: USB cable mini 25 cm / 9.84 inch CAB-R2: RS232 cable 200 cm / 78.74 inch

ELATEC GmbH • Zeppelinstr. 1 • 82178 Puchheim • Germany
 P +49 89 552 9961 0 • F +49 89 552 9961 129 • E-Mail: info-rfid@elatec.com
 elatec.com



Elatec reserves the right to change any information or data in this document without prior notice. Elatec declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Modules](#) category:

Click to view products by [Elatec](#) manufacturer:

Other Similar products are found below :

[HMC-C009](#) [nRF24L01P-MODULE-PCB](#) [HMC-C001](#) [HMC-C021](#) [HMC-C024](#) [XB9XT-DPRS-721](#) [XBP24BZ7PIT-004J](#) [XBP9B-DMUTB022](#) [nRF24L01P-MODULE-SMA](#) [CMD-KEY2-418-CRE](#) [XM-C92-2P-UA](#) [XB9XT-DPUS-721](#) [V640-A90](#) [HMC-C583](#) [MAAM-008818-TR3000](#) [MTSMC-H5-U](#) [SIMSA868-PRO](#) [SIMSA915C-PRO](#) [SIMSA868C-PRO](#) [SIMSA433C-PRO](#) [SIMSA915-PRO](#) [XBP9B-DMUT-042](#) [HMC-C582](#) [HMC-C022](#) [XBP9B-DPST-041](#) [XBP9B-DMWT-042](#) [SM-MN-00-HF-RC](#) [HMC-C031](#) [MT-02](#) [M1002GB](#) [702-W](#) [SIMSA868C-N-PRO](#) [SIMSA433C-N-PRO](#) [SIMSA915C-N-PRO](#) [PEPPER WIRELESS C1 USB](#) [S2-1050J-Z0K4J](#) [S2-10732-Z1T61](#) [S2-10716-Z1W4E](#) [S2-107ET-Z1W6D](#) [S2-10686-Z1L1D](#) [S2-10688-Z1L1T](#) [S2-106BA-Z1P20](#) [UC15EA-MINIPCIE](#) [SU60-2230C-PU](#) [RC-TFSK3-868](#) [NANO RFID POE](#) [650201424G](#) [H330 A30-00](#) [CMD-HHCP-433-MD](#) [RC-CC1101-SPI-868](#)