



Common mode choke

| Order code | TCK-119 |
|-----------------------|------------------------------------------|
| Inductance | Pin 1-2: 419 μH ±25% (at 10 kHz / 50 mV) |
| | Pin 3-4: 419 μH ±25% (at 10 kHz / 50 mV) |
| Rated current | 0.78 A max. |
| DCR | Pin 1-2: 117 mΩ |
| | Pin 3-4: 117 mΩ |
| Rated voltage | 500 VDC |
| Operating temperature | -40 to +105°C |

Impedance curve

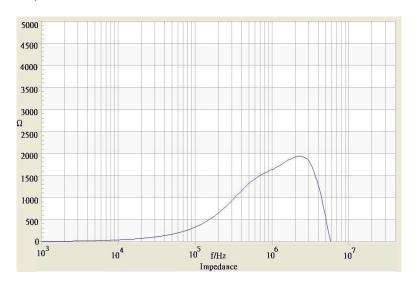

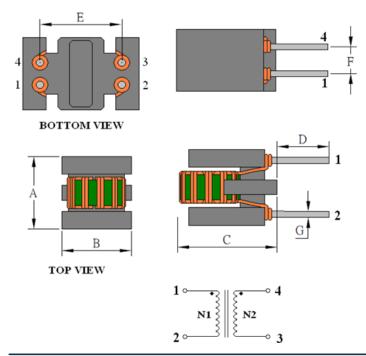

Dimensions [mm]

| Α | 7.5 max. |
|---|------------|
| В | 8.5 max. |
| С | 10.5 max. |
| D | 3.5 ±1.0 |
| Е | 5.08 ±0.5 |
| F | 2.54 ±0.3 |
| G | ø 0.6 ±0.1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by TRACO Power manufacturer:

Other Similar products are found below:

MLZ1608M6R8WTD25 MLZ1608N6R8LT000 MLZ1608N3R3LTD25 MLZ1608N3R3LTD00 MLZ1608N150LT000 MLZ1608N150WTD00 MLZ1608M150WTD00 MLZ1608M1SWTD00 MLZ1608M1SWTD00 MLZ1608N1R5WTD00 MLZ1608N1R5WTD00 MLZ1608N1R5WTD00 MLZ1608N1R5WTD00 B82432C1333K000 PCMB053T-1R0MS PCMB053T-1R5MS PCMB104T-1R5MS CR32NP-100KC CR32NP-151KC CR32NP-180KC CR32NP-181KC CR32NP-180KC CR32NP-181KC CR32NP-390KC CR32NP-390KC CR32NP-389MC CR32NP-680KC CR32NP-820KC CR32NP-8R2MC CR43NP-390KC CR43NP-560KC CR43NP-680KC CR54NP-181KC CR54NP-470LC CR54NP-820KC CR54NP-8R5MC MGDQ4-00004-P MGDU1-00016-P MHL1ECTTP18NJ MHL1JCTTD12NJ PE-51506NL PE-53601NL PE-53630NL PE-53824SNLT PE-62892NL PE-92100NL PG0434.801NLT PG0936.113NLT PM06-2N7 PM06-39NJ HC2LP-R47-R HC3-2R2-R HC8-1R2-R