

TRACO POWER

Inductor

Order code	TCK-149
Inductance	22 μH ±20% (at 100 kHz / 1 V)
Rated current	1.1 A max.
DCR	240 mΩ
Operating temperature	-40 to +125°C


Impedance curve

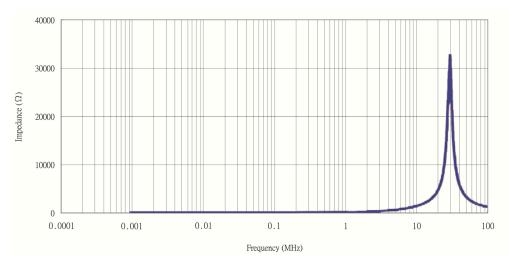









Dimensions [mm]

А	5.3 ±0.4
В	5.0 ± 0.4
С	2.7 ±0.5
D	2 typ.
E	2 typ.
F	2 typ.

© Copyright 2018 Traco Electronic AG

TRACO POWER www.tracopower.com

Specifications can be changed without notice!

Rev. September 6, 2018 Page 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by TRACO Power manufacturer:

Other Similar products are found below :

MLZ1608M6R8WTD25 MLZ1608N6R8LT000 MLZ1608N3R3LTD25 MLZ1608N3R3LT000 MLZ1608N150LT000 MLZ1608M150WTD25 MLZ1608M3R3WTD25 MLZ1608M3R3WT000 MLZ1608M150WT000 MLZ1608A1R5WT000 MLZ1608N1R5LT000 B82432C1333K000 PCMB053T-1R0MS PCMB053T-1R5MS PCMB104T-1R5MS CR32NP-100KC CR32NP-151KC CR32NP-180KC CR32NP-181KC CR32NP-1R5MC CR32NP-390KC CR32NP-3R9MC CR32NP-680KC CR32NP-820KC CR32NP-8R2MC CR43NP-390KC CR43NP-560KC CR43NP-680KC CR54NP-181KC CR54NP-470LC CR54NP-820KC CR54NP-8R5MC MGDQ4-00004-P MGDU1-00016-P MHL1ECTTP18NJ MHL1JCTTD12NJ PE-51506NL PE-53601NL PE-53630NL PE-53824SNLT PE-62892NL PE-92100NL PG0434.801NLT PG0936.113NLT PM06-2N7 PM06-39NJ HC2LP-R47-R HC2-R47-R HC3-2R2-R HC8-1R2-R