



Heat Shrinkable Tubing up to 3:1 - 1 m lengths

TREDUX thin wall

TREDUX thin wall heat shrink tubing is used for general electrical insulation and mechanical protection of cables and wires.

Features and Benefits



- Thin walled, flexible, cross-linked polyolefin tubing
- 1m shrink tubing lengths delivered in handy display carton
- 9 sizes from 1.5 mm to 101.6 mm
- Colours: black and yellow/green



**More colours on request.
Please contact us!**



One Step to the Web!

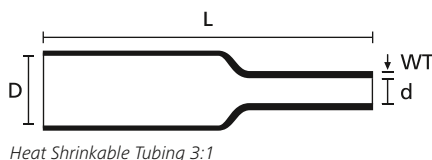

TREDUX shrinks a maximum of 3:1.

MATERIAL	Polyolefin, cross-linked (PO-X)	
Shrink Ratio	2:1	3:1
Operating Temperature	-55 °C to +135 °C	
Minimum Shrink Temperature	+100 °C	
Longitudinal change after shrinkage	+/-5 % max.	
Dielectric Strength	20 kV/mm according to ASTM D 150	
Flammability	UL224 VW-1	
Specifications	CSA, SAE - AMS - DTL-23053/5 Class 1 and 3, SAE - AMS - DTL-23053/5 Class 2 (clear), UL224 125 °C 600V VW-1	

RoHS ✓

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Pack Cont.	Colour	Shrink Ratio	Article-No.
TREDUX-1.5/0.5	1.5	0.5	0.50	1.0 m	20 pcs.	Black (BK)	3:1	319-00150
	1.5	0.5	0.50	1.0 m	20 pcs.	Green-Yellow (GNYE)	3:1	319-00157
TREDUX-3/1	3.0	1.0	0.60	1.0 m	20 pcs.	Black (BK)	3:1	319-00300
	3.0	1.0	0.60	1.0 m	20 pcs.	Green-Yellow (GNYE)	3:1	319-00307
TREDUX-6/2	6.0	2.0	0.70	1.0 m	15 pcs.	Black (BK)	3:1	319-00600
	6.0	2.0	0.70	1.0 m	15 pcs.	Green-Yellow (GNYE)	3:1	319-00607
TREDUX-12/4	12.0	4.0	0.85	1.0 m	10 pcs.	Black (BK)	3:1	319-01200
	12.0	4.0	0.85	1.0 m	10 pcs.	Green-Yellow (GNYE)	3:1	319-01207
TREDUX-24/8	24.0	8.0	1.20	1.0 m	5 pcs.	Black (BK)	3:1	319-02400
	24.0	8.0	1.20	1.0 m	5 pcs.	Green-Yellow (GNYE)	3:1	319-02407
TREDUX-38.1/19.1	38.1	19.1	1.02	1.0 m	6 pcs.	Black (BK)	2:1	319-03800
	38.1	19.1	1.02	1.0 m	6 pcs.	Green-Yellow (GNYE)	2:1	319-03807
TREDUX-50.8/25.4	50.8	25.4	1.14	1.0 m	6 pcs.	Black (BK)	2:1	319-05100
TREDUX-76.2/38.1	76.2	38.1	1.27	1.0 m	3 pcs.	Black (BK)	2:1	319-07600
TREDUX-101.6/50.8	101.6	50.8	1.40	1.0 m	2 pcs.	Black (BK)	2:1	319-10200

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



For product specific approvals and specifications please refer to the Appendix.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [Hellermann](#) manufacturer:

Other Similar products are found below :

[770-006S102](#) [5685710001](#) [CR6145-000](#) [CR9960-000](#) [603312-4](#) [607381P039](#) [617867N001](#) [6500750004](#) [D-306-38](#) [770-003S106W2](#) [770-007A303](#)
[770-010Y106W1](#) [770-010Y706W1](#) [7771210001](#) [MFP-1/4"-Clear](#) [MFP-3/64"-Clear](#) [MFT-MT2000-NO.14-0-SP](#) [MFT-MT2000-NO.65-X-SP](#)
[MHHT-4-15K2-G-104](#) [MIL-LT-1-1/2-4-SP](#) [MIL-LT-1-1/2-9-STK](#) [MIL-LT-1/2-2-STK](#) [MIL-LT-3-0-SP](#) [MIL-LT-3/32-0-SP](#) [MIL-LT-3/32-6-SP](#)
[MIL-LT-3/4-6-SP](#) [MIL-LT-3/8-0-SP](#) [8159270001](#) [839602-000](#) [8423-6](#) [FP301-116-6"-Black](#) [FP301-1/2-48"-Black](#) [FP301-12-48"-Black-Hdr](#) [FP301-](#)
[1/4-48"-Black](#) [FP301-1/4-48"-White-Hdr](#) [FP301-18-48"-Black-Hdr](#) [FP301-1/8-6"-Black](#) [FP301-18-6"-Black-Bulk](#) [FP301-316-48"-Blue-Hdr](#) [FP301-](#)
[316-6"-Clear](#) [FP301-332-6"-Black](#) [FP301-3/8-6"-Clear](#) [912229N002](#) [120-126-16BL](#) [121-001-09](#) [121-018-32](#) [121-018-40](#) [121-123-1-1-32BTC](#) [121-](#)
[123-1-1-40BTC](#) [121-127-09BK](#)