



Heat Shrinkable Tubing up to 3,5:1 - 1 m lengths

TREDUX HA47 thick wall - with adhesive liner

The toughness and the weatherability of TREDUX thick wall tubing makes it suitable for exposed applications and underground cable joints.

Features and Benefits

- Thick walled polyolefin adhesive-lined tubing
- Standard 1m lengths
- Securely packed in display carton for use in smaller quantities
- For low and medium voltage power applications



TREDUX HA47 - application below ground.




Detailed Information about Heatguns please refer to page 529.



One Step to the Web!

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	up to 3.5:1
Operating Temperature	-55 °C to +110 °C
Minimum Shrink Temperature	+120 °C
Softening Point Adhesive	+85 °C
Longitudinal change after shrinkage	-10 % max.
Dielectric Strength	20 kV/mm
Flammability	not flame retarded

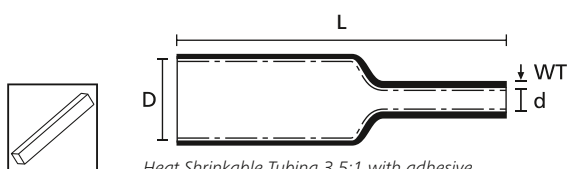

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Pack Cont.	Colour	Article-No.
TREDUX-HA47-19/6	19.0	6.0	2.70	1.0 m	10 pcs.	Black (BK)	321-50190
TREDUX-HA47-33/8	33.0	8.0	3.20	1.0 m	5 pcs.	Black (BK)	321-50330
TREDUX-HA47-45/12	45.0	12.0	4.10	1.0 m	4 pcs.	Black (BK)	321-50450
TREDUX-HA47-51/16	51.0	16.0	4.10	1.0 m	2 pcs.	Black (BK)	321-50510
TREDUX-HA47-68/22	68.0	22.0	4.10	1.0 m	1 pcs.	Black (BK)	321-50680
TREDUX-HA47-85/25	85.0	25.4	4.30	1.0 m	1 pcs.	Black (BK)	321-50850

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [Hellermann](#) manufacturer:

Other Similar products are found below :

[770-006S102](#) [5685710001](#) [CR6145-000](#) [CR9960-000](#) [603312-4](#) [607381P039](#) [617867N001](#) [6500750004](#) [D-306-38](#) [770-003S106W2](#) [770-007A303](#)
[770-010Y106W1](#) [770-010Y706W1](#) [7771210001](#) [MFP-1/4"-Clear](#) [MFP-3/64"-Clear](#) [MFT-MT2000-NO.14-0-SP](#) [MFT-MT2000-NO.65-X-SP](#)
[MHHT-4-15K2-G-104](#) [MIL-LT-1-1/2-4-SP](#) [MIL-LT-1-1/2-9-STK](#) [MIL-LT-1/2-2-STK](#) [MIL-LT-3-0-SP](#) [MIL-LT-3/32-0-SP](#) [MIL-LT-3/32-6-SP](#)
[MIL-LT-3/4-6-SP](#) [MIL-LT-3/8-0-SP](#) [8159270001](#) [839602-000](#) [8423-6](#) [FP301-116-6"-Black](#) [FP301-1/2-48"-Black](#) [FP301-12-48"-Black-Hdr](#) [FP301-1/4-48"-Black](#) [FP301-1/4-48"-White-Hdr](#) [FP301-18-48"-Black-Hdr](#) [FP301-1/8-6"-Black](#) [FP301-18-6"-Black-Bulk](#) [FP301-316-48"-Blue-Hdr](#) [FP301-316-6"-Clear](#) [FP301-332-6"-Black](#) [FP301-3/8-6"-Clear](#) [912229N002](#) [120-126-16BL](#) [121-001-09](#) [121-018-32](#) [121-018-40](#) [121-123-1-1-32BTC](#) [121-123-1-1-40BTC](#) [121-127-09BK](#)