

ALUMINUM ELECTROLYTIC CAPACITORS



Chip Type, High Reliability.
Low temperature ESR specification.



For SMD



Long Life



Anti-Solvent Feature


- Chip type, high temperature range, for +125°C use.
 - Added ESR specification after the test at -40°C (φ6.3 sizes provide only for the first stage.)
 - Applicable to automatic mounting machine fed with carrier tape.
 - Compliant to the RoHS directive (2011/65/EU).
 - AEC-Q200 compliant.
- Please contact us for details.




Specifications

Item	Performance Characteristics					
Category Temperature Range	-40 to +125°C					
Rated Voltage Range	10 to 50V					
Rated Capacitance Range	10 to 470μF					
Capacitance Tolerance	±20% at 120Hz, 20°C					
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4(μA), whichever is greater.					
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C					
	Rated voltage (V)	10	16	25	35	50
Stability at Low Temperature	Measurement frequency : 120Hz					
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	6	4
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 125°C.					
	Capacitance change	Within ±30% of the initial capacitance value				
	tan δ	300% or less than the initial specified value				
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.					
	Capacitance change	Within ±10% of the initial capacitance value				
	tan δ	Less than or equal to the initial specified value				
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.					
	Capacitance change	Within ±10% of the initial capacitance value				
	tan δ	Less than or equal to the initial specified value				
Marking	Black print on the case top.					

Chip Type

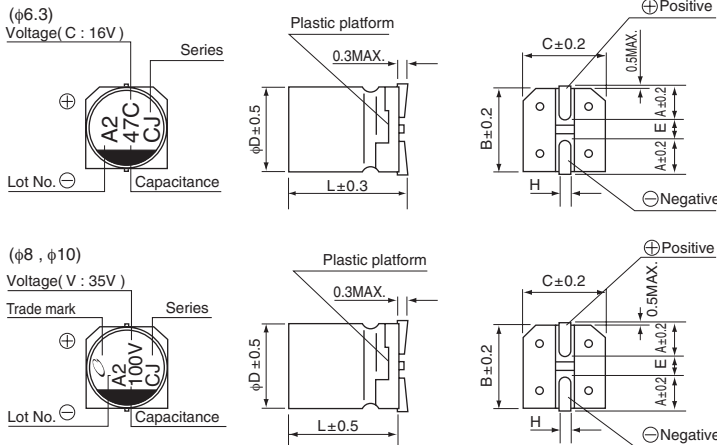

Type numbering system (Example : 10V 100μF)

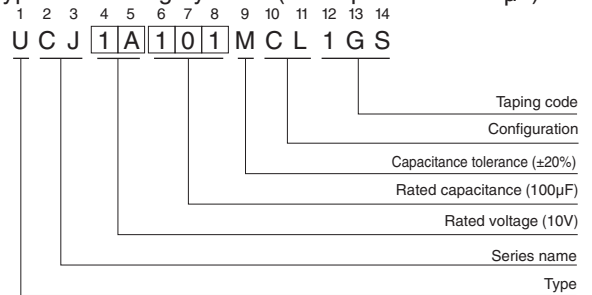

φD×L (mm)	6.3×8.7	8×10	10×10
A	2.4	2.9	3.2
B	6.6	8.3	10.3
C	6.6	8.3	10.3
E	2.2	3.1	4.5
L	8.7	10	10
H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

Voltage	10	16	25	35	50
Code	A	C	E	V	H

Dimensions

Cap. (μF)	V		10			16			25			35			50						
	Code		1A			1C			1E			1V			1H						
10	100																				
22	220								6.3×8.7	14	-	95	6.3×8.7	14	-	95	6.3×8.7	14	-	95	
33	330								6.3×8.7	14	-	95	6.3×8.7	14	-	95	8×10	2.0	6.0	200	
47	470					6.3×8.7	14	-	95	6.3×8.7	14	-	95	6.3×8.7	14	-	95	10×10	1.5	4.5	330
100	101	6.3×8.7	14	-	95	8×10	2.0	6.0	250	8×10	2.0	6.0	250	10×10	1.5	4.5	400	10×10	1.5	4.5	330
220	221	8×10	2.0	6.0	250	10×10	1.5	4.5	400	10×10	1.5	4.5	400	10×10	1.5	4.5	400	Case size φD×L (mm)	Initial test	after endurance test	Rated ripple
330	331	10×10	1.5	4.5	400	10×10	1.5	4.5	400	10×10	1.5	4.5	400								
470	471	10×10	1.5	4.5	400																

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

Max. ESR (Ω) at -40°C 100kHz, Rated ripple current (mArms) at 125°C 100kHz

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Nichicon manufacturer](#):

Other Similar products are found below :

[GA0402A270FXBAC31G](#) [RVB-50V330MG10UQ-R](#) [RVJ-50V101MH10U-R](#) [RVZ-35V151MH10U-R2](#) [RC0J226M04005VR](#)
[RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C226M05005VR](#) [RC1C476M6L005VR](#) [RC1E107M6L07KVR](#) [RC1E336M6L005VR](#)
[RC1H106M6L005VR](#) [RC1H475M05005VR](#) [RC1V227M10010VR](#) [RC1V476M6L006VR](#) [50SEV1M4X5.5](#) [TYEH1A336E55MTR](#)
[TYEH1H106F55MTR](#) [TYEH1V106E55MTR](#) [35SEV47M6.3X8](#) [35SGV220M10X10.5](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#)
[50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [SC1C476M05005VR](#) [SC1E107M0806BVR](#) [SC1E227M08010VR](#) [SC1H106M05005VR](#)
[SC1H106M6L005VR](#) [SC1H227M10010VR](#) [SC1H335M04005VR](#) [CE4.7/50-SMD](#) [VEJ4R7M1VTR-0406](#) [VZH331M1ETR-0810](#)
[VES101M1CTR-0605](#) [TYEH1H475E55MTR](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEEFK1H151GP](#) [EEEFK1A681GP](#) [EEE0GA471XP](#)
[EEEFK1V151GP](#) [RC1V107M6L07KVR](#) [VZH101M1VTR-0810](#) [VE010M1HTR-0405](#) [GYA1V151MCQ1GS](#) [EEH-ZC1J680P](#) [EEH-](#)
[ZK1V181P](#) [GYA1V271MCQ1GS](#)