

UM18

Ultrasonic sensor




Operating distance
30 ... 250 mm

Ultrasonic sensor

- Independent of material shape (also foils, glass, bottles)
- Synchronisation and temperature compensation
- Insensitive to dirt, dust and fog
- 1 switching output or 2 switching outputs (PNP or NPN) or analogue output
- Scanning mode and deflector mode




Dimensional drawing

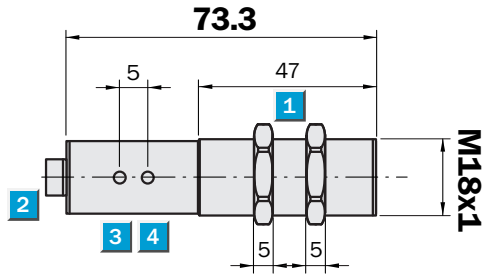


- 1** Locking nuts, 24 mm A/F
- 2** Connection plug M12
- 3** LED 1 (UM18-51112, UM18-51114, UM18-11116 and UM18-11117)
- 4** LED 2 (UM18-51112, UM18-51114, UM18-11116 and UM18-11117)

Connection types

UM18-51111	UM18-51112	UM18-11116
UM18-51115	UM18-51114	UM18-11117

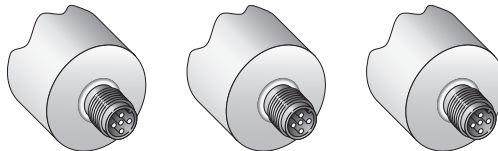

5-pin, M12 5-pin, M12 5-pin, M12

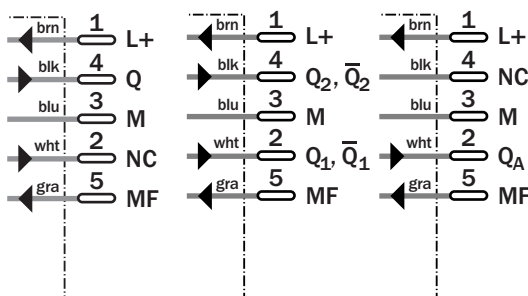


Technical data		UM18-	51111	51112	51114	51115	11116	11117				
Operating distance	30 mm ... 250 mm (< 350 mm)											
(maximum scanning distance)												
Ultrasonic frequency	320 kHz											
Resolution	0.36 mm											
Reproducibility	typ. ±0.15 % of final value											
Accuracy	≤ 2 % of final value											
Operating voltage	V _s = 10 ... 30 V DC											
Residual ripple	10 %											
Idle current consumption	≤ 40 mA											
Housing material sensor	Brass tube, nickel plated											
	Plastic parts: PBT											
	Ultrasonic converter: polyurethane											
	foam, epoxy resin with glass content											
Enclosure rating to EN 60 529	IP 67											
Connection type	Plug M12, 5-pin											
Display elements	2 yellow LEDs											
Ambient temperature	Operating: -25 °C ... +70 °C											
	Storage: -40 °C ... +85 °C											
Weight	65 g approx. (with 2 nuts)											
Control input MF	Teach-in											
Switching outputs PNP	1 x PNP ¹⁾											
	invertable											
	2 x PNP ²⁾											
Switching outputs NPN	1 x NPN ³⁾											
	invertable											
	2 x NPN ⁴⁾											
Analogue output	4 ... 20 mA											
	R _L ≤ 100 W at 10 V ≤ V _s ≤ 20 V											
	R _L ≤ 500 W at V _s ≥ 20 V											
	0 ... 10 V											
	R _L ≥ 100 kW at V _s ≥ 15 V											
Temperature compensation	Yes											
Synchronisation option	Yes											
Functional display	Yes											
Scanning mode	Yes											
Object between sensor and background mode	Yes											
Switching hysteresis	2.0 mm ±10 %											
Switching frequency	15 Hz											
Response time	32 ms											
Standby delay	< 300 msv											

1) (L+) - 2 V, I_{max} = 500 mA, short-circuit proof
 2) (L+) - 2 V, I_{max} = 2 x 500 mA, short-circuit proof

3) M + 2 V, I_{max} = 500 mA, short-circuit proof
 4) M + 2 V, I_{max} = 2 x 500 mA, short-circuit proof

Measurement ranges

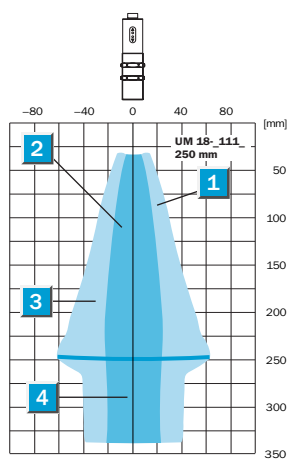

- 1 Aligned plate 500 x 500 mm²
- 2 Tube diameter 10 mm
- 3 Operating distance
- 4 Maximum scanning distance

Order information

Type	Order no.
UM18-51111	6028965
UM18-51112	6028964
UM18-51114	6028973
UM18-51115	6028974
UM18-11116	6029507
UM18-11117	6029508

Great Britain
 Phone +44 (0)1727 83 11 21
 E-Mail info@sick.co.uk

USA
 Phone +1(952) 941-6780
 tollfree+1-800-325-7425
 E-Mail info@sickusa.com

Australia
 Phone +61 3 9497 4100
 tollfree+1800 33 48 02
 E-Mail sales@sick.com.au

More representatives and agencies in all major industrial nations at www.sick.com

SICK
 Sensor Intelligence.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [Sick](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [980659-1](#) [QT-12](#)
[E2ECQC2D1M1GJT03M](#) [E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N](#) [10M](#) [E2E-X4MD1-G](#)
[E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#) [EC3016PPASL-1](#) [EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [25.161.3253.0](#)
[25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#) [25.523.3253.0](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM552A100](#) [SM952A126100LE](#)
[SM956A132600](#) [A1220EUA-T](#) [F3S-A162-U](#) [CL18](#) [QT-08L](#) [34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IA08BLF15NOM5](#) [IA08BSF15NOM5](#)
[IA12ASF04DOM1](#) [IS2](#) [IS31SE5000-UTLS2-TR](#) [34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#) [VM18VA3000Q](#) [XS508BSCBL2](#)
[XS512BLNAM12](#)