
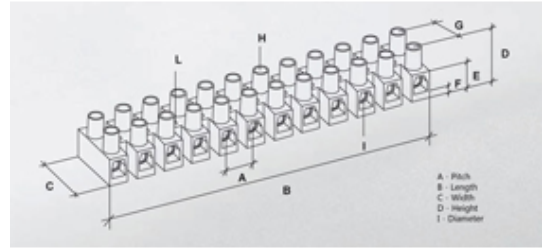


## HY431/12 NYLP

12 pole natural polyamide PA6.6 wire protected pillar terminal block 8mm pitch 17.5a 450v

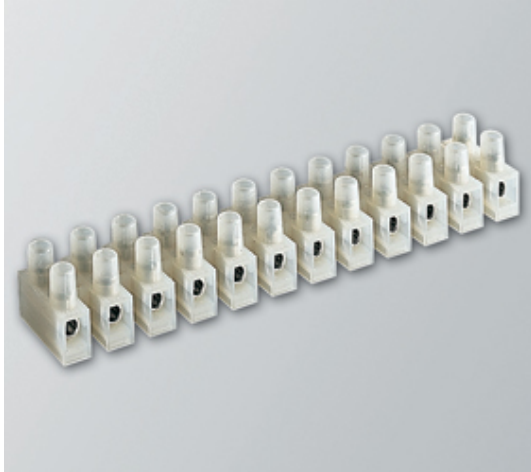

### SPECIFICATION

<b>Number of Poles</b>	12
<b>Terminal Material</b>	OT58 nickel plated
<b>Terminal Type</b>	Wire Protected
<b>Body Material</b>	Polyamide PA6.6
<b>Colour</b>	Natural
<b>Glow Wire Resistance Test Temp</b>	GWIT775°C (EN60695-2-13)
<b>Max Conductor Size (Sq mm)</b>	1.5
<b>Max Current (A)</b>	17.5
<b>Max Voltage (V)</b>	450
<b>Working Temperature</b>	110
<b>Pitch (mm)</b>	8
<b>Height (mm)</b>	14.9
<b>Width (mm)</b>	16.4
<b>Length (mm)</b>	94
<b>Diameter (mm)</b>	2.6
<b>Flammability Rating</b>	UL94V2 and GWIT775°C
<b>Terminal Screw Material</b>	White zinc plated steel
<b>Wire Protection Material</b>	Stainless steel

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hylec manufacturer](#):*

Other Similar products are found below :

[THB.387.D2A](#) [LN167001](#) [THB.391.A3A](#) [50.625 PA/3X7](#) [THB.406.A1G](#) [THB.387.A4A.R](#) [K150-1050-00](#) [K151-1025-00](#) [K151-1063-00](#)  
[50.625 PA/R7035](#) [50.216 MPOT-F](#) [K150-1032-00](#) [THB.382.A1A-KIT](#) [K341-1020-00](#) [50.616M/EMVDL-F](#) [GHG9601955R0004](#) [K160-1016-00](#) [K160-1050-00](#) [K150-1040-00](#) [HYKS-07612PP](#) [THB110A6B-F](#) [K151-1032-00](#) [THB.380.3ASSY](#) [THB.384.B1A](#) [50.216 ES](#)  
[THK.404.X2A00-F](#) [TTK25BK-SD-F](#) [THB.405.B2A](#) [THB.405.A2B](#) [K160-1063-00](#) [THB.390.C1A](#) [THB.405.A2A](#) [1026010004-F](#) [50.625 ES](#)  
[THB.405.A2G](#) [THA.209.A1A](#) [THB.387.D4A](#) [THB.387.C5A](#) [K160-1025-00](#) [50.625 M/EMVDL-F](#) [K160-1040-00](#) [THC.027.A1A](#)  
[GHG9601955R0022](#) [THB.387.D5A](#) [K150-1020-00](#) [6000337BC](#) [THB.384.A1A](#) [THK.209.44](#) [5665/221](#) [THB.387.A4A](#)