



VarioSIGN

VarioSIGN – Innovative signal towers with unique functions and a range of advantages

The new LED signal tower VarioSIGN stands out from the competition with its range of unique features and advantages as well as its revolutionary, innovative form.

If no signal is active, the LED tower blends into the background with its colourless, translucent housing - without distracting from the design of the machine. Only in the event of an active signal is the tower filled with colour, making its presence known with its large, attention-grabbing illuminated surface.

Thus the signal tower combines a maximum optical effect with modern machine forms and designs.



ALL ADVANTAGES AT ONE GLANCE

- ✓ Mechanical modularity of the three tiers replaced by electronic modularity
- ✓ Colours and light effects, depending on the variant, can be individually set via DIP switch and changed at any time
- ✓ High quality workmanship and appearance
- ✓ Light effect visible from one or two sides as required
- ✓ With optional integrated, high output buzzer
- ✓ Variants available with adjustable, attention-grabbing lighting effects

ADJUSTABLE LIGHTING CONFIGURATION AND MOUNTING POSITION

Depending on the variant, a tier-by-tier or complete illumination of the lighting body is possible.



Tier-by-tier illumination of the lighting body



Colour intensive, complete illumination



Lighting body positioned upwards



Lighting body positioned downwards

Depending on the application, the lighting body of the VarioSIGN signal tower can be positioned to point upwards, downwards or horizontally.

690

VarioSIGN – red/yellow/green

Signal Towers • Completely pre-assembled
VarioSIGN

NEW



Fixed, three-tier colour distribution in red, yellow and green

- LED signal tower with permanent lights in red, yellow and green
- Preset, three-tier colour distribution
- 1 or 2 sided illumination
- With optional integrated, high output buzzer

i TECHNICAL SPECIFICATIONS:

Dimensions (W x H x D):	62 mm x 220 mm x 30,5 mm
Housing:	PC/ABS blend, black
Dome:	PC, transparent
Fixing:	Base mounting
Connection:	Screwable connection, max. 1,5 mm ²
Current consumption:	Optical: 55 mA per tier Buzzer: 20 mA


🛒 ORDER SPECIFICATIONS:

VarioSIGN without Buzzer	24 V =
1-sided	690 330 55
2-sided	690 320 55
VarioSIGN with Buzzer	24 V =
1-sided	690 310 55
2-sided	690 300 55

Available from the 2nd Quarter 2009.

📏 TECHNICAL DIAGRAMS:

see page 272

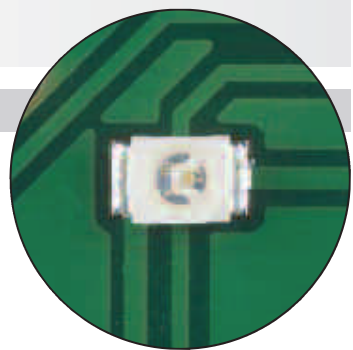





Fixed colour distribution with SMD technology



In its inactive state, the signal tower blends into the background thanks to its colourless, translucent housing

In preparation



690

VarioSIGN – RGY

NEW



The colours red, yellow and green can adjusted via DIP switch for any required order or distribution



Attention-grabbing illumination of the entire lighting body in one colour (can be triggered externally)

- LED signal tower with permanent lights in red, yellow and green
- Complete illumination of the lighting body in one colour possible (can be triggered externally)
- Colour distribution can be set and adjusted as required via DIP switch
- With optional integrated, high output buzzer

 TECHNICAL SPECIFICATIONS:

Dimensions (W x H x D):	62 mm x 220 mm x 30.5 mm
Housing:	PC/ABS blend, black
Dome:	PC, transparent
Fixing:	Base mounting
Connection:	Screwable connection, max. 1.5 mm ²
Current consumption:	Optical: depending on the colour combination, up to 120 mA Buzzer: 20 mA


 ORDER SPECIFICATIONS:

VarioSIGN without Buzzer	24 V =
1-sided	690 230 55
2-sided	690 220 55
VarioSIGN with Buzzer	24 V =
1-sided	690 210 55
2-sided	690 200 55

Available from the 2nd Quarter 2009.

 TECHNICAL DIAGRAMS:

see page 272

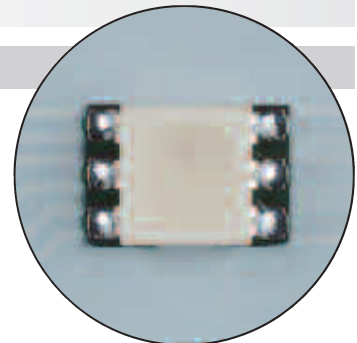


Completely flexible colour distribution thanks to RGY LEDs


In preparation



NEW

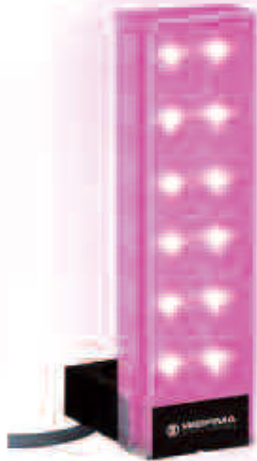

Attention-grabbing illumination of the entire lighting body in one colour (a choice of 7 colours, can be triggered externally)

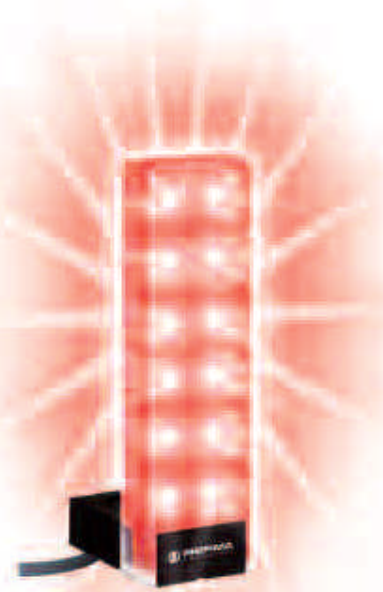

The "EVS" light effect ensures a maximum attention-grabbing effect (can be set with complete illumination)

- LED signal tower with permanent light and additional light effects
- 7 colours
- Complete illumination of the lighting body in one colour possible (can be triggered externally)
- Colour distribution can be set and adjusted as required via DIP switch
- With optional integrated, high volume buzzer

i TECHNICAL SPECIFICATIONS:

Dimensions (W x H x D):	62 mm x 220 mm x 30.5 mm
Housing:	PC/ABS blend, black
Dome:	PC, transparent
Fixing:	Base mounting
Connection:	Screwable connection, max. 1.5 mm ²
Current consumption:	Optical: depending on the colour, up to 500 mA max. Buzzer: 20 mA
Possible colours:	red, yellow, green, clear, blue, violet, turquoise
Lighting effects:	Tier-by-tier illumination: Flashing light Complete illumination: EVS


🛒 ORDER SPECIFICATIONS:

VarioSIGN with light effects and Buzzer	24 V _{DC}
1-sided	690 010 55
2-sided	690 000 55

Available from the 2nd Quarter 2009.

📏 TECHNICAL DIAGRAMS:

see page 272

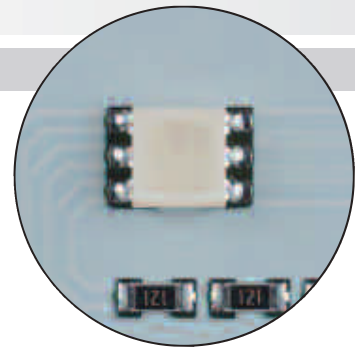

Thanks to RGB LEDs 7 different colours can be set

In preparation



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Indicators & Alerts](#) category:

Click to view products by [Werma](#) manufacturer:

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100 PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)