
	TECHNICAL DATA SHEET	code	8719NH
		version	4
		date	2007-02-14
	8719NH	page	1/2

APPLICATION

Instrumentation and computer cable for data transmission applications.

CONSTRUCTION

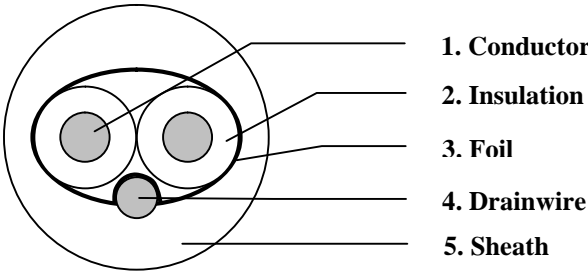

1. Conductor	AWG16 (19xAWG29) tinned Cu
2. Insulation	
Material	Polyethylene
Diameter over insulation	3.10 ± 0.07 mm
Colour of insulation	Black and Transparent
3. Foil	
Material	Aluminium / Polyester
Thickness	9 / 23 µm
4. Drainwire	AWG18 (16xAWG30) tinned Cu
5. Sheath	
Material	FRNC
Colour	Chrome (like RAL 7037)
Nominal diameter	8.10 mm


REQUIREMENTS AND TEST METHODS

Electrical:

Max. continuous current per conductor @ 25 °C	7 A
Nominal capacitance conductors of pair @ 1 kHz	75.4 pF/m
Nominal capacitance conductor to shield @ 1 kHz *	144.4 pF/m
Nominal inductance of pairs	0.66 µH/m
Nominal resistance conductor	14.76 Ω/km
Nominal resistance shield	20.00 Ω/km
Nominal impedance	65 Ohm

*One conductor to other conductor and shield.

#Nominal Values are for information only.

	TECHNICAL DATA SHEET	code	8719NH
		version	4
		date	2007-02-14
	8719NH	page	2/2

Mechanical and physical:

Flame resistance	IEC 60332-3C
Oil resistance	ASTMD741
Radiation resistance	IEC544 (CERN)
Application specification	BS 7655 section 6.1 table 1, LTS 3
Halogen content according to IEC754-1	zero
Corrosivity of fire gasses according to IEC754-2	
Conductivity	≤ 100 μS/cm
pH value	≥ 3.5
Temperature range installing	-15 to +80 °C
Temperature range operating (moving installation)	-15 to +80 °C
Temperature range operating (fixed installation)	-45 to +80 °C
Temperature range storage	-45 to +80 °C
Nominal weight	approx. 9.5 kg/100m

PACKAGING

On non-returnable reels with a nominal length of 1000m (-0, 0%).
Each reel is labelled with the following data: Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Belden](#) manufacturer:

Other Similar products are found below :

[HIPWP2LA](#) [AX270172](#) [8916-BRN-100](#) [8916-GRN/YEL-500](#) [8916-YEL-500](#) [8917 002100](#) [8917-005-500](#) [8917-GRN/YEL-100](#) [8918-GRY-1000](#) [8919-BRN-1000](#) [8919-DK-BLU-100](#) [8920-BRN-1000](#) [8920-GRY-1000](#) [8920-RED-1000](#) [7805R-GRY-100](#) [7810A-BLK-500](#) [8104-CHR-500](#) [8108-CHR-100](#) [8125-CHR-100](#) [8132-CHR-1000](#) [8133-CHR-1000](#) [8155-CHR-1000](#) [8162-CHR-1000](#) [8164-CHR-100](#) [8164-CHR-1000](#) [8185-CHR-100](#) [8205-CHR-1000](#) [8218-BLK-1000](#) [8221-BLK-1000](#) [8233-BLK-1000](#) [8237-BLK-500](#) [8238-BLK-500](#) [8240-BLK-U1000](#) [8241A-BLK-1000](#) [8262-BLK-1000](#) [8263-BLK-U1000](#) [8268-BLK-500](#) [8279-BLK-1000](#) [83002 0041000](#) [83002 0101000](#) [83003-VIO-100](#) [83003-VIO-500](#) [83004 0051000](#) [83006 0041000](#) [83007 0081000](#) [83008-WHT-1000](#) [83010-BRN-100](#) [83010-DK-GRN-1000](#) [83023-BRN-100](#) [83023-DK-GRN-100](#)