

# 2-Serial Module 6.0V 2.5F




## FEATURES

- Electric double layer capacitor
- 2 cells serially connected supercapacitor
- Semi-permanent, quick charge and discharge than batteries
- Suitable for smart meter or car driving recorder application
- UL and ISO/TS certificated, RoHS compliant
- Radial design with lead terminal type customized in 3 ways



## DIMENSIONS

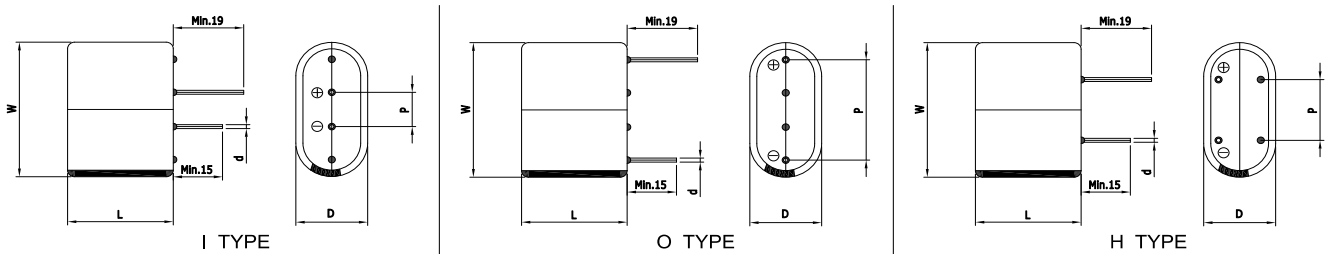

Dimensions in mm					
D +0.1 Max	W ± 1.0	L ± 1.5	d ± 0.1	P ± 0.2	
Φ10.5	21.0	22.5	Φ0.6	I: 5.5	O: 15.5 H: 10.5

This drawing is not to be scaled.

## SPECIFICATIONS

Part Number	Rated Voltage, $V_R$ (V)	Rated Capacitance (F)	AC ESR 1kHz (mΩ)	DC IR (mΩ)	Maximum Current (A)	Leakage Current (mA)	Stored Energy (J)	Dimension D x W x L (mm)	Weight (g)
VEC 6R0 255 QG-X	6.0	2.5	135.00	205.00	5.	0.015	45.0	10.5 x 21.0 x 22.5	4.7

\* X is variant type code such as I, O or H.

\* Maximum Current: 1 second discharge to  $\frac{1}{2} \cdot V_R$

\* Leakage Current: After 72hours at  $V_R$  and 25 °C

Item	Characteristics	Remarks
Rated Voltage ( $V_R$ )	6.0V	
Capacitance Tolerance	-10 ~ +30%	
Operating Temperature ( $T_{min} \sim T_{max}$ )	-40 ~ +65 °C	$ \Delta cap  \leq 30\%$ of initial value at 25 °C $ \Delta ESR  \leq 100\%$ of specified value at 25 °C After 1,000 hours application of $V_R$ at $T_{max}$
Storage Temperature	-40 ~ 70 °C	
Cycle Life	500,000 cycles	$ \Delta cap  \leq 30\%$ of initial value at 25 °C $ \Delta ESR  \leq 100\%$ of specified value at 25 °C Cycles from $V_R$ to $\frac{1}{2} \cdot V_R$ under constant current at 25 °C
Shelf Life	2 years	$ \Delta cap  \leq 10\%$ of initial value at 25 °C $ \Delta ESR  \leq 50\%$ of specified value at 25 °C Without electrical charge under $T_{max}$

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [VINATech](#) manufacturer:*

Other Similar products are found below :

[VEC3R0 507QG](#) [WEC3R0 106QG](#) [WEC3R0 156QG](#) [VEC3R0 156QG](#) [WEC3R0 335QG](#) [VEC3R0 506QG](#) [VEC3R0 105QG](#)