

Tango 15

Low Profile, GSM/GPS Combined Antenna



Key Features

- Combined GSM & GPS Functionality
- Quad Band GSM/GPRS & 3G
- Screw/Through-Hole Mount Antenna
- GSM Gain 2.5dBi; GPS LNA Gain 25dB

Additional Considerations

- Compatible worldwide with any cellular GSM application
- Perfect for covert applications
- Vandal resistant
- Dual mounting adhesive and screw mount

General Description

The Tango 15's are a Low profile, robust and vandal proof range of antennas suitable for outdoor equipment like vending machines, traffic light systems and also automotive and many other types of GPS tracking applications. The Tango 15 is 95mm in diameter and only 18mm high.

It is IP65 rated, comes with double sided sticky pad shaped to the antenna and forms a good seal between antenna and the equipment it is mounted to.

The Tango 15 is designed for covert applications where the user wishes to keep their antenna out of sight from unwanted eyes. Operating on GSM & 3G, the Tango 15 works well with various kinds of telemetry equipment, such as Siretta's Zeta and the Zoom terminal series. This antenna combines an active GPS antenna with an LNA (Low Noise Amplifier) so it can be used with GPS applications as well as cellular. Its bolt through base allows the antenna to be securely fixed to the roof of vehicles and its IP65 rating makes it more than suitable for the outdoors.

With an M12 bolt it can be used with a mounting hole of between 13-20mm. The Tango 15 is a solidly made antenna to last for years and is available with various lengths of cable and connector types.



Tango 15

Low Profile, GSM/GPS Combined Antenna


Key Specifications - Electrical

| Temperature range: | | -40 to +85°C |
|-----------------------------|----------|-----------------------------|
| Impedance: | | 50ohm |
| VSWR: | | <2.0:1 |
| Average GSM Gain | | 2.5dBi |
| GPS (LNA) Gain | | 25dB |
| Voltage and supply current: | | 3 - 5V DC 25mA typical |
| Operating frequency: | GSM/GPRS | 890-960 /1710-1880MHz |
| | 3G | 2100MHz |
| | GPS | 1575.42MHz |
| Polarisation: | | GSM – Vertical / GPS – RHCP |

Key Specifications - Mechanical

| Dimensions: | ø95 x18mm |
|-------------|---------------------------------------|
| Cable: | RG174 1m/3m |
| Connector: | SMA, TNC, FME BNC, N type as required |

Dimensions

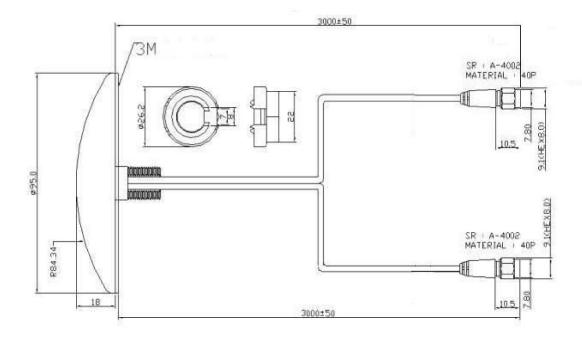





Tango 15

Low Profile, GSM/GPS Combined Antenna


GSM Return Loss Graph

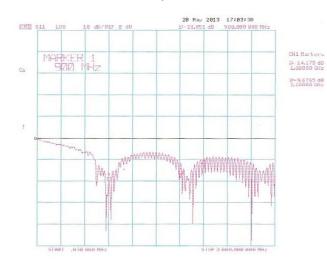

GSM VSWR Graph

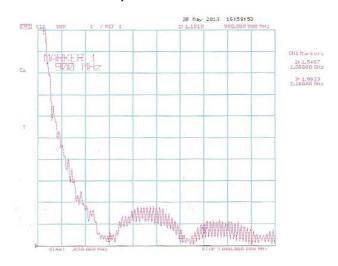

GPS Return Loss Graph

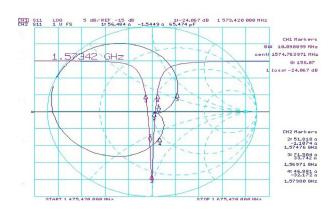

Ordering Details:

| Part number | Description |
|------------------------|---|
| TANGO15/1M/SMAM/S/S/24 | GSM/GPS Combined Bolt Through Antenna with 1 Meter Cable and SMA Male Connector |
| TANGO15/3M/SMAM/S/S/24 | GSM/GPS Combined Bolt Through Antenna with 3 Meter Cable and SMA Male Connector |

Rev 1.0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for SIRETTA manufacturer:

Other Similar products are found below:

ALPHA4A/5M/SMAM/S/S/26 DELTA5A/X/SMAM/S/S/17 OSCAR17/X/TNC/S/S/19 DELTA5A/X/BNCM/S/S/17 SNYPER-LTE-SPECTRUM ASMA2000F058L13 ASMA2000C058L13 TANGO14/5M/LL/SMAM/S/S/24 TANGO1/1M/FMEF/S/S/4 ASME500F058L13 TANGO3/0.5M/SMAM/S/S/31 TANGO40/X/NTYPEF/S/S/32 QUARTZ-W22-LTE(EU)+ACC ASMA500B174L13 31557 ECHO40/0.1M/UFL/S/S/32 MIKE1A/5M/FMEF/S/S/20 QUARTZ-W22-UMTS(EU)+ACC TANGO11A/2.5M/SMAM/S/S/19 ASMA500F058L13 ZETA-N-UMTS ECHO11/0.2M/IPEX/S/S/12 ASMA300E174L13 ASMA1000F058L13 DELTA19/X/SMAM/S/S/35 ASMA2000E058L13 ASMZG300F058L13 MIKE3A/5M/SMAM/S/S/17 TANGO15/3M/SMAM/SMAM/S/S/24 TANGO20/3M/SMAM/S/S/26 ASMZG500A058L13 ASMZG1500F058L13 ALPHA1A/2.5M/SMAM/S/S/11 OSCAR40/10M/LL/SMAM/S/S/33 TANGO11A/5M/LL/SMAM/S/S/19 TANGO29/1M/SMAM/RP/S/35 ASME2000F058L13 ASMK015X174S11 LC300-N2-GPRS DELTA6A/X/SMAM/S/S/11 MIKE1A/2.5M/FMEF/S/S/20 ASMZG1000F058L13 OSCAR41/X/NTYPEF/S/S/29 TANGO22/3M/SMAM/SMAM/SMAM/SMAM/SAMAM/SAMAM/SAMAM/S/S/24 TANGO12/3M/SMAM/RP OSCAR18/X/NF/S/S/22 TANGO14/3M/SMAM/S/S/24