

### Heat Shrinkable Tubing adhesive lined - 1.2 m lengths

TA32/TA42 is designed for environmental sealing and electrical insulation of wire splices, terminations and components.

#### Features and Benefits

- Thin walled adhesive-lined heat shrink tubing
- Highly flame retardant
- Outer wall conforms to UL224



TA32 and TA42 are UL224 listed adhesive lined tubing. Available in 3:1 and 4:1 shrink ratio.




Cut lengths available on request. Please contact us!

<b>MATERIAL</b>	Polyolefin, cross-linked (PO-X)
<b>Operating Temperature</b>	-55 °C to +125 °C
<b>Minimum Shrink Temperature</b>	+110 °C
<b>Softening Point Adhesive</b>	+110 °C
<b>Longitudinal change after shrinkage</b>	-15 % max.
<b>Dielectric Strength</b>	15 kV/mm according to IEC 60684 P2
<b>Flammability</b>	UL224
<b>Specifications</b>	CSA, SAE - AMS - DTL-23053/4 Class 3, UL224 125 °C 600V

RoHS

#### TA32 - thin wall, 3:1 shrink ratio

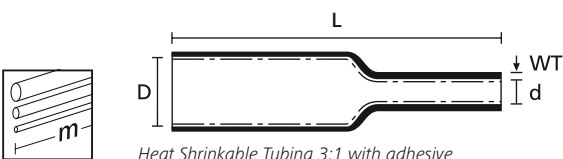

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Shrink Ratio	Article-No.
TA32-3/1	3.2	0.6	0.95	1.2 m	Black (BK)	3:1	318-30300
TA32 4.5/1.5	4.5	1.5	1.10	1.2 m	Black (BK)	3:1	318-30450
TA32-6/2	6.0	2.0	1.20	1.2 m	Black (BK)	3:1	318-30600
TA32-9/3	9.0	3.0	1.30	1.2 m	Black (BK)	3:1	318-30900
TA32-12/4	12.0	4.0	1.40	1.2 m	Black (BK)	3:1	318-31200
TA32-19/6	19.0	6.0	1.80	1.2 m	Black (BK)	3:1	318-31900
TA32-24/8	24.0	8.0	2.50	1.2 m	Black (BK)	3:1	318-32400
TA32-40/13	40.0	13.0	2.50	1.2 m	Black (BK)	3:1	318-34000

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.




For product specific approvals and specifications please refer to the Appendix.



### Heat Shrinkable Tubing adhesive lined - 1.2 m lengths

TA42 - thin wall, 4:1 shrink ratio

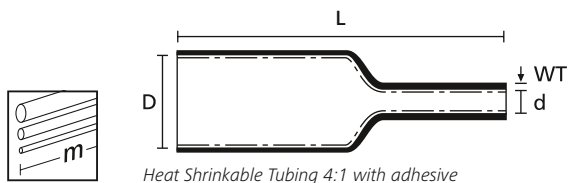

Detailed Information about Heatguns please refer to page 529.

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Shrink Ratio	Article-No.
TA42-4/1	4.0	1.0	1.00	1.2 m	Black (BK)	4:1	318-40400
TA42-8/2	8.0	2.0	1.20	1.2 m	Black (BK)	4:1	318-40800
TA42-12/3	12.0	3.0	1.40	1.2 m	Black (BK)	4:1	318-41200
TA42-16/4	16.0	4.0	1.80	1.2 m	Black (BK)	4:1	318-41600
TA42-24/6	24.0	6.0	2.25	1.2 m	Black (BK)	4:1	318-42400
TA42-32/8	32.0	8.0	2.55	1.2 m	Black (BK)	4:1	318-43200
TA42-52/13	52.0	13.0	2.55	1.2 m	Black (BK)	4:1	318-45200

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.



For product specific approvals and specifications please refer to the Appendix.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hellermann](#) manufacturer:*

Other Similar products are found below :

[111-03250](#) [RSB2](#) [ETST668](#) [T18RPOCKETPAC](#) [217-2B7W1](#) [380-03003](#) [406064A](#) [TSR1I-21](#) [TSR1I-29](#) [TSR1I-33](#) [TSR1I-36](#) [1126-4JW8](#)  
[RSB6](#) [MS3109-12AU](#) [Q30LR-PA66-BK-C1](#) [HWCLIP16 BLACK](#) [RLT150.NB2P](#) [T50IDH0C2](#) [T30MR BLACK](#) [AS45](#) [LPH275 BLACK](#)  
[T120R.RN3P](#) [MK7.9A](#) [181-50840](#) [TWT2](#) [MCTPP50L](#) [MCTPP120R](#) [MBT14H](#) [G51P-A-PE-NA](#) [E4500](#) [TSRI-JB2](#) [SBS2 YELLOW](#) [309-](#)  
[65110](#) [309-65129](#) [309-65214](#) [309-65298](#) [309-65300](#) [309-65105](#) [309-65117](#) [309-65118](#) [309-65164](#) [NGM20-RED](#) [NGM20-WH](#) [H75X25](#)  
[RED](#) [HA67-69.8-11.7](#) [HA67-88.9-17.1](#) [321-50012](#) [HEGPA6614 GREY](#) [HIS-3-9/3-PEX-CL](#) [HIS-3 12/4 CLR](#)