


## Sleeving

### PVC Sleeving – On a drum

A commercial grade of PVC sleeving which can be used in many applications.

#### Features and Benefits

- Highly flexible insulation
- Can also be used for identification
- Minimum working temperature -30°C
- Maximum working temperature 85°C
- Specification: BS2848 Type 3, Class 85T
- Colours available: blue, brown, green/yellow
- Other sizes are available on request
- Supplied on a drum

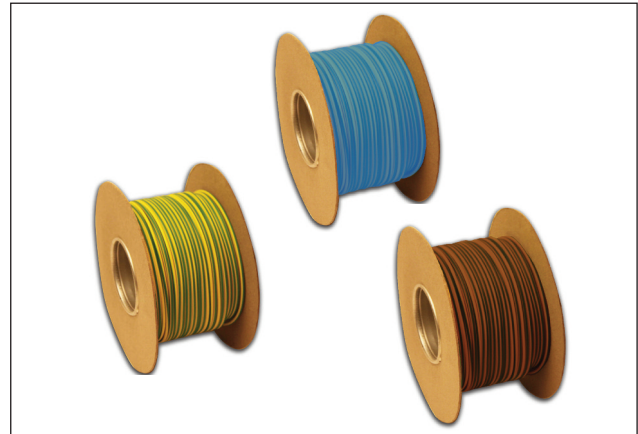

PVC Sleeving on a drum.

TYPE	ID mm	Wall Thickness mm	Colour	Pack Cont.	Article-No.
PVC20BERL	2.0	0.5	Blue	100m drum	172-02092
PVC20BNRL	2.0	0.5	Brown	100m drum	172-02091
PVC20GN-YWRL	2.0	0.5	Green-Yellow	100m drum	172-02088
PVC30BERL	3.0	0.5	Blue	100m drum	172-02094
PVC30BNRL	3.0	0.5	Brown	100m drum	172-02093
PVC30GN-YWRL	3.0	0.5	Green-Yellow	100m drum	172-02089
PVC40BERL	4.0	0.5	Blue	100m drum	172-02096
PVC40BNRL	4.0	0.5	Brown	100m drum	172-02095
PVC40GN-YWRL	4.0	0.5	Green-Yellow	100m drum	172-02090

All dimensions are in mm (nominal) and are subject to technical modification.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hellermann](#) manufacturer:*

Other Similar products are found below :

[111-03250](#) [RSB2](#) [ETST668](#) [T18RPOCKETPAC](#) [217-2B7W1](#) [380-03003](#) [406064A](#) [TSR1I-21](#) [TSR1I-29](#) [TSR1I-33](#) [TSR1I-36](#) [1126-4JW8](#)  
[RSB6](#) [MS3109-12AU](#) [Q30LR-PA66-BK-C1](#) [HWCLIP16 BLACK](#) [RLT150.NB2P](#) [T50IDH0C2](#) [T30MR BLACK](#) [AS45](#) [LPH275 BLACK](#)  
[T120R.RN3P](#) [MK7.9A](#) [181-50840](#) [TWT2](#) [MCTPP50L](#) [MCTPP120R](#) [MBT14H](#) [G51P-A-PE-NA](#) [E4500](#) [TSRI-JB2](#) [SBS2 YELLOW](#) [309-](#)  
[65110](#) [309-65129](#) [309-65214](#) [309-65298](#) [309-65300](#) [309-65105](#) [309-65117](#) [309-65118](#) [309-65164](#) [NGM20-RED](#) [NGM20-WH](#) [H75X25](#)  
[RED](#) [HA67-69.8-11.7](#) [HA67-88.9-17.1](#) [321-50012](#) [HEGPA6614 GREY](#) [HIS-3-9/3-PEX-CL](#) [HIS-3 12/4 CLR](#)