

We measure it.



# Folding thermometer

**testo 103 – The smallest folding  
thermometer in its class**

---

Ideally suited for applications in the food sector

---

Easy to operate

---

Handy and small – fits in any trouser or jacket pocket

---

Robust probe with narrow measurement tip

---

Hygienic and easy-to-clean measurement tip


---

Splash-proof according to IP55

---

Certified according to EN 13485

---

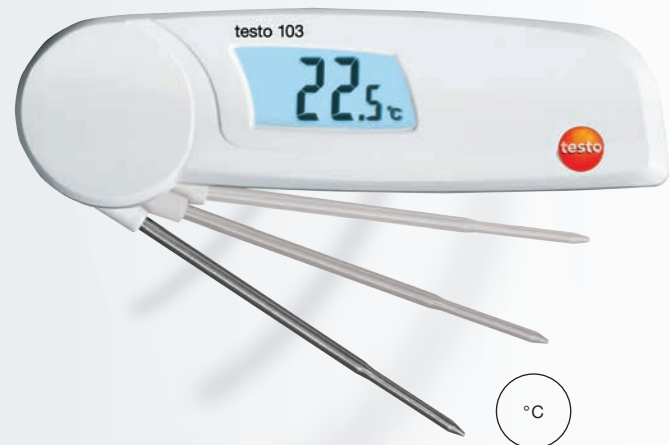

At a length of 11 cm, the testo 103 is the smallest folding thermometer in its class. It hardly takes up any space, so you can simply stow it in your breast or trouser pocket. That way, it is always quickly available and close to hand. The small folding thermometer is immediately ready to measure after folding out to an angle of greater than 30°, and is therefore flexible in its application. After measurement, the probe can simply be folded away and stored safely until the next measurement.

The folding thermometer testo 103 is conform to HACCP and EN 13485. Its narrow measurement tip leaves only small punctures in the foodstuffs, making it optimally suitable for spot checks – for example in production, storage and processing, in gastronomy, in supermarket chains, in food retail or in industry

[www.testo.com](http://www.testo.com)

testo 103

We measure it.



## Technical data

### testo 103

The testo 103 the smallest folding thermometer of its class!  
It offers handy, practical and strong support when carrying out monitoring measurements.

Part no. 0560 0103



#### Sensor type

#### NTC

Measuring range	-30 to +220 °C
Accuracy ±1 digit	±0.5 °C (-30 to +99.9 °C) ±1 % of mv (+100 to +220 °C)
Resolution	0.1 °C / °F

#### General technical data

Storage temperature	-30 to +70 °C
Operating temperature	-20 to +60 °C
Battery type	2 lithium batteries (CR2032)
Battery life	300 h (typical)
Dimensions Probe length/diameter Probe tip diameter	189 x 35 x 19 mm (Probe folded out) 75 mm / Ø 3 mm 22 mm / Ø 2,3 mm
Display	LCD, 1 line, non-illuminated
Reaction time	$t_{99} = 10$ s
Switch on/off	With folding mechanism (approx. 30°) / Auto off after 60 mins.
Housing material	ABS
Weight	49 g
Protection class	IP55
Warranty	2 years
Standard	EN 13485

0981 9464/msp/A/09.2013

Subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Testo](#) manufacturer:*

Other Similar products are found below :

[206 PH1](#) [TESTO 316-1 0632 0316](#) [TESTO 470 0563 0470](#) [TESTO 770-1 0590 7701](#) [TESTO 905-T1 0560 9055](#) [0572 0500](#) [0590 0016](#) [0602 4592](#) [0590 0008](#) [0590 0018](#) [0602 0645](#) [0635 1025](#) [0628 0020](#) [TESTO 435-2 0563 4352](#) [TESTO 605I 0560 1605](#) [TESTO 755-2](#) [0590 7552](#) [TESTO 770-2 0590 7702](#) [TESTO 869 + TESTO 745](#) [TESTO 869 + TESTO 750-3](#) [465](#) [410-2](#) [460](#) [0572 6172](#) [0590 0001](#) [0614 2272](#) [TESTO 417 0560 4170](#) [0609 7072](#) [TESTO 174-H SET](#) [TESTO 176-T4](#) [TESTO 176-P1](#) [TESTO 830-T2](#) [TESTO 103](#) [TESTO 905-T1](#) [TESTO 108-2](#) [TESTO 905I](#) [TESTO 108](#) [0563 4403](#) [0590 7703](#) [TESTO 435-3 0560 4353](#) [TESTO 735-1 0560 7351](#) [TESTO 760-3 0590 7603](#) [TESTO 770-3 0590 7703](#) [0590 0013](#) [0602 4892](#) [TESTO 635-2 0563 6352](#) [TESTO 750-3 0590 7503](#) [TESTO 760-1 0590 7601](#) [816-1](#) [TESTO 174-T SET](#) [TESTO 605-H1](#)