

pushbuttontimer

energybasic

pushbuttontimer fitting and operating instructions

outdoor pushbuttontimer - three wire (for all load types)


Product: 550B-1 Three wire

Rating at 240V ac

- Incandescent 10A ▪ Compact Fluorescent 10A
- Resistive 10A ▪ Fluorescent 10A ▪ Time Delay 2min - 1h

This product can ONLY be used with the back box supplied and can be used in outdoor and bathroom applications. Failure to use the back box provided will invalidate the warranty. It is essential that the correct IP66 rated connections are made to keep the IP66 rating of the back box maintained.

1. Take the surface mount box and remove knockouts as required. Ideally remove with a hole saw for cleanest effect and remove any burrs. Drill a small 3mm drain hole at the back of the box in the position marked 'DRAIN'. Drill outwards from the inside of the box.
2. Mount the surface mount box on a secure surface using the mounting pack supplied. Place screw cover seal over the rear mounting screws after screwing the box to the wall.
3. It is essential to maintain the IP rating with all connections to the box. Please use a suitable M20 cable gland and use appropriate sealing washers. For steel wired armoured connections to the box use a nylon 20mm seal to maintain IP rating.
4. Prior to fitting the switch to the box identify the live, switch live and neutral by test.
5. Set the dip switches to the required time settings using dip switch diagram 3.
6. Fit the live and switch live into the correct terminals as marked. See Diagram 1.
7. Secure front with the 4 small screws supplied and tighten evenly from opposite corners to opposite corners. Do not push or force screws.
8. Turn on the mains power.
9. Press button to switch lights ON.
10. The product will turn itself off when the time period selected has elapsed.
11. The product can be switched OFF after 5 seconds by pressing and holding the button.



NOTE: Capacitor will be required when switching all low power loads such as LEDs, ZD fittings, energy saving lamps, contactor coils or any low power consuming loads.

Diagram 3

Please note that the black bar denotes the position of the dip switch.




Diagram 1

Wiring diagram for a three wire unit.





Diagram 2

Wiring diagram for three wire additional Switches/PIR into circuit.

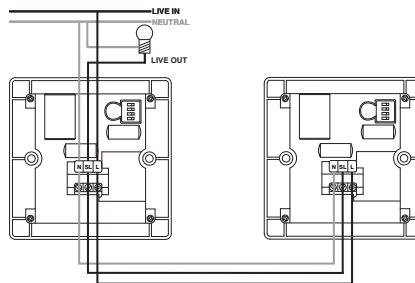

IMPORTANT NOTICE

All wiring should be carried out by a competent person or a qualified electrician and should be fitted to IET 17th Edition Wiring regulations BS 7671:2008.

Call +44 (0) 1675 468222 or click www.elkay.co.uk

RPM-386

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Elkay](#) manufacturer:

Other Similar products are found below :

[370B-1](#) [550B-1](#) [374-DREM](#) [374-DMBOX](#) [AQUASAFE](#) [400A](#) [041852X](#) [041854F](#) [041874R](#) [2001/3/CG/3](#) [1278](#) [1275](#) [1276-18](#)
[2001/4/CG/4](#)