



INDICATOR LIGHT, 22MM, ROUND, PLASTIC, WHITE, SMOOTH LENS, WITH HOLDER, LED MODULE, WITH INTEGRATED LED 230V AC, SCREW TERMINAL

Figure similar

|  |  |
|--|--|
| product brand name   | SIRIUS ACT   |
| Product designation  | Commanding and signaling devices   |
| Design of the product  | Pilot Light  |
| Manufacturer article number  |  |
| <ul style="list-style-type: none"> <li>• of supplied LED module</li> <li>• of the supplied holder</li> <li>• of supplied repeater</li> </ul> | <a href="#">3SU1401-1BF60-1AA0</a><br><a href="#">3SU1500-0AA10-0AA0</a><br><a href="#">3SU1006-6AA60-0AA0</a> |

| Actuator:  |          |
|--|----------|
| Product expansion optional Light source                                      | Yes      |
| Color  |          |
| <ul style="list-style-type: none"> <li>• of the actuating element</li> </ul> | White    |
| Material of the actuating element  | plastic  |
| Shape of the actuating element   | round    |
| Outer diameter of the actuating element                                      | 29.45 mm |

| Front ring:                  |    |
|------------------------------|----|
| Product component front ring | No |

| Holder:                |         |
|------------------------|---------|
| Material of the holder | Plastic |

| Display:              |   |
|-----------------------|---|
| Number of LED modules | 1 |

| General technical data:  |     |
|--|-----|
| Product component  |     |
| <ul style="list-style-type: none"> <li>• Light source</li> </ul> | Yes |

|   |                                   |
|---|-----------------------------------|
| <b>Insulation voltage</b>                                   |                                   |
| • Rated value   | 320 V                             |
| <b>Type of voltage</b>                                      |                                   |
| • of the operating voltage                                  | AC                                |
| <b>Degree of pollution</b>                                  | 3                                 |
| <b>Shock resistance</b>                                     |                                   |
| • acc. to IEC 60068-2-27                                    | Sinusoidal half-wave 50 g / 11 ms |
| <b>Vibration resistance</b>                                 |                                   |
| • acc. to IEC 60068-2-6                                     | 10 ... 500 Hz: 5g                 |
| <b>Surge voltage resistance Rated value</b>                 | 4 kV                              |
| <b>Protection class IP</b>                                  | IP66, IP67, IP69(IP69K)           |
| • of the terminal   | IP20                              |
| <b>Equipment marking</b>                                    |                                   |
| • acc. to DIN EN 61346-2                                    | P                                 |
| • acc. to DIN EN 81346-2                                    | P                                 |
| <b>Operating voltage</b>                                    |                                   |
| • Rated value   | 230 V                             |
| <b>Relative positive tolerance of the operating voltage</b> | 20 %                              |
| <b>Relative negative tolerance of the operating voltage</b> | 20 %                              |

#### Auxiliary circuit:

|                              |   |
|------------------------------|---|
| <b>Number of NC contacts</b> |   |
| • for auxiliary contacts     | 0 |
| <b>Number of NO contacts</b> |   |
| • for auxiliary contacts     | 0 |
| <b>Number of CO contacts</b> |   |
| • for auxiliary contacts     | 0 |

#### Connections/ Terminals:

|  |                                    |
|--|------------------------------------|
| <b>Type of electrical connection</b>               |                                    |
| • of modules and accessories                       | Screw-type terminal                |
| <b>Type of connectable conductor cross-section</b> |                                    |
| • solid with core end processing                   | 2x (0.5 ... 0.75 mm <sup>2</sup> ) |
| • solid without core end processing                | 2x (1.0 ... 1.5 mm <sup>2</sup> )  |
| • finely stranded with core end processing         | 2x (0.5 ... 1.5 mm <sup>2</sup> )  |
| • finely stranded without core end processing      | 2x (1,0 ... 1,5 mm <sup>2</sup> )  |
| • for AWG conductors                               | 2x (18 ... 14)                     |
| <b>Tightening torque</b>                           |                                    |
| • with screw-type terminals                        | 0.8 ... 0.9 N·m                    |

#### Lamp:

|                                  |       |
|----------------------------------|-------|
| <b>Type of light source</b>      | LED   |
| <b>Color of the light source</b> | white |

#### Ambient conditions:

|  |                |
|--|----------------|
| <b>Ambient temperature</b>   |                |
| <ul style="list-style-type: none"> <li>during operation</li> </ul> | -25 ... +70 °C |
| <ul style="list-style-type: none"> <li>during storage</li> </ul>   | -40 ... +80 °C |

**Installation/ mounting/ dimensions:**

|  |                      |
|--|----------------------|
| <b>Mounting type</b>   | front panel mounting |
| <ul style="list-style-type: none"> <li>of modules and accessories</li> </ul> | Front plate mounting |
| <b>Height</b>  | 40 mm                |
| <b>Width</b>   | 30 mm                |
| <b>Shape of the installation opening</b>                                     | round                |
| <b>Mounting diameter</b>   | 22 mm                |

**Certificates/ approvals:**

**Further information**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU11066AA601AA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3SU11066AA601AA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU11066AA601AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU11066AA601AA0&lang=en)



**-P**  
230 V AC

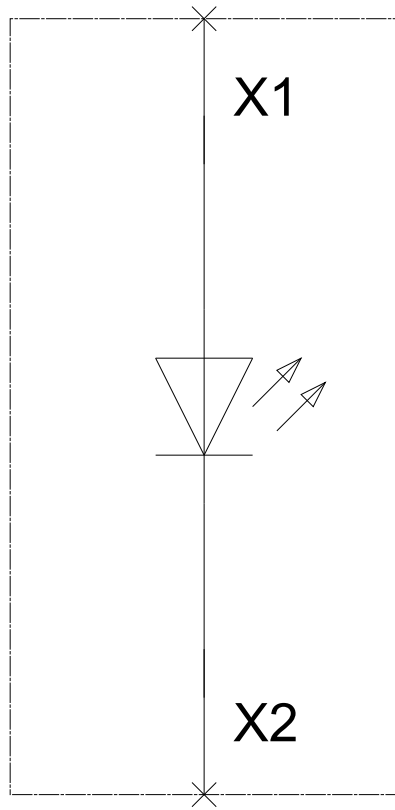

last modified:

27.04.2015

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Siemens](#) manufacturer:*

Other Similar products are found below :

[5SJ4101-7HG40](#) [5SJ4130-7HG40](#) [5SL6120-7](#) [5ST2144](#) [5ST2167](#) [5SX2125-7](#) [5SX2132-7](#) [5SX2320-7](#) [5SX2340-7](#) [5SX9200](#) [5SY4106-8](#)  
[5SY6220-7](#) [6EP1334-3BA10-8AB0](#) [6EP1935-6MD31](#) [6EP3333-8SB00-0AY0](#) [6ES5451-7LA11](#) [6ES7322-1BF01-0AA0](#) [6GK7142-7BX00-0AX0](#) [6GK7177-1FA10-0AA0](#) [D11CEU1](#) [PD63F160](#) [FXD63B175](#) [8WA1011-2SF25](#) [8WA1721](#) [8WA1815](#) [8WA8848-0AC](#) [8WA8-848-0AM](#) [8WA8-848-0AN](#) [8WA8-848-0AT](#) [8WA8-848-0AX](#) [8WA8-848-0BD](#) [8WA8-848-0BF](#) [8WA8-848-0BL](#) [8WA8-848-0BP](#) [8WA8-848-0BQ](#) [14DP32AC81](#) [ED21B100](#) [B32523-.47@400V-J](#) [B65541-T25-A48](#) [B65549-E4-X23](#) [B65812-B1512-T1](#) [B66317-G0000-X127](#) [B66337-G0500-X127](#) [B66417-G-X167](#) [B82724-J](#) [8WA1201](#) [8WA1854](#) [8WA1870](#) [8WA8-848-0AK](#) [8WA8-848-0AV](#)