


Data Sheet

SUCOTEST_18A_Stock Assembly

Description

Sucotest 18A armoured test assemblies offer excellent electrical performance (low insertion loss combined with unique stability and excellent return loss) for heavy duty, outdoor and harsh environment measurements up to 18 GHz.

Product description ST18A/Nm/Nf/3000mm
Item number 84013032

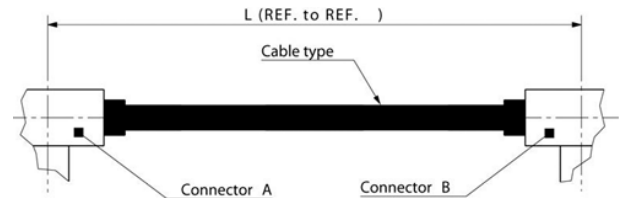

Product Configuration

Cable type	SUCOTEST_18A
Ruggedisation	Steel wire spring, steel braid, TPU jacket blue
Length of assembly	3'000 mm
Connector A	N straight male
Connector B	N straight female

Technical Data

Mechanical Data

Diameter:	10.3 mm
Min. bending radius static	30 mm
Min. bending radius repeated	50 mm
Recommended mating torque (*)	1.0 Nm
Waterproof	IP 68
Flex life	100'000 cycles
Weight	300 g

Environmental Data

Operating temperature	- 40°C to + 85°C
Storage temperature	- 40°C to + 85°C
RoHS, REACH	Compliant

Electrical Data

Impedance	50 Ω
Operating frequency	up to 18 GHz
Velocity of propagation	77 %
Capacitance	87 pF / m
Time delay	4.3 ns / m

Return Loss	min. 19.0 dB	(up to 18 GHz)
Insertion loss (assembly)	max. 5.30 dB	(18 GHz, 25°C)
Power handling	min. 120 W	(18 GHz, sea level, 25°C)
Screening effectiveness	> 90 dB	(up to 18 GHz)
Insertion loss stability vs. bending (**)	+/- 0.2 dB	(up to 18 GHz)
Phase stability vs. bending (**)	< 0.7°	(el/GHz)

General Information

(*) H+S torque wrench H+S description: 74_Z-0-0-193 // material/item number: 22645085
 (**) Stability test 360°, diameter 55 mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[3402.17.A](#) [31 MMBX-SMA-50-1/111 NE](#) [74Z-0-23-17](#) [65 SMA-50-0-1/111 NE](#) [32 MMBX-50-0-6 / 111 NE](#) [Mini141 K-16](#) [7404.17.0003](#)
[33_N-SMA-50-51/1--_UE](#) [76_Z-0-2-1](#) [Minibend L-13](#) [Microbend MTR-11](#) [16_N-50-3-103/133_NE](#) [Microbend R-4.5](#) [74_Z-0-0-53](#)
[85_SMC-50-0-1/133_NE](#) [31_PC35-50-0-2/199_NE](#) [65_BNC-50-0-2/133_NE](#) [1399.17.0125](#) [76_Z-0-4-1](#) [80346275](#) [11_C-50-7-6/133_NE](#)
[6620_SMA-50-2/199_NE](#) [Minibend R-5.5](#) [11_SMB-50-2-41/111_NE](#) [Mini141 K-8](#) [74_Z-0-0-246](#) [22_BNC-50-0-5/133_NE](#) [6500_N-50-](#)
[1/199_NE](#) [6560.17.AA](#) [3401.17.0033](#) [11_N-50-2-1/133_NE](#) [3401.00.0022](#) [74_Z-0-0-142](#) [11_QLA-01-2-8/122_NE](#) [34_BNC-50-0-6/100_NE](#)
[74_Z-0-0-59](#) [Minibend R-6.5](#) [21_N-75-4-8/133_NE](#) [24_BNC-75-2-1/133_NE](#) [24_H4-50-3-1/133_NE](#) [Minibend-14](#) [31_SHV-50-0-1/133_NE](#)
[23_SK-50-0-52/199_NE](#) [74_Z-0-0-214](#) [23_BNC-50-0-2/133_NE](#) [74_Z-0-0-60](#) [33_SK-PC24-50-1/199_NE](#) [24_N-50-7-8/133_NE](#) [74_Z-0-0-](#)
[157](#) [6810_N-50-1/1--_NE](#)