


Ex accessories

V-Ex

Metr.

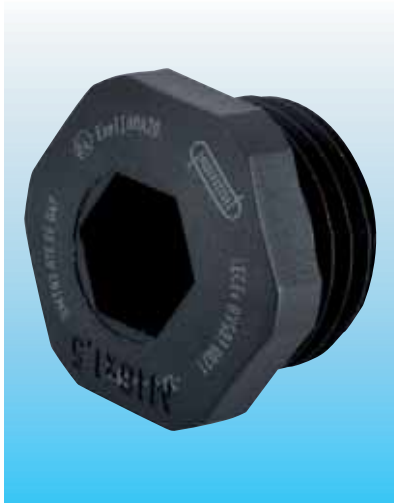


Material	Polyamide
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
Operating Temperature	-20 °C – 90 °C (-4 °F – 194 °F)
Colours	black (RAL 9005)



II 2G 1D

For the international certificates please see page 170 or our homepage www.hummel.com



AG	GL mm	H mm	D mm	mm	mm	Number
M 12 x 1,5	8,5	13	16,5	15	6	1.297.1201.50
M 16 x 1,5	8,5	13	20,5	19	8	1.297.1601.50
M 20 x 1,5	9	14,5	25,5	24	8	1.297.2001.50
M 25 x 1,5	10,5	16	30,5	28	8	1.297.2501.50
M 32 x 1,5	11,5	17,5	38	36	8	1.297.3201.50
M 40 x 1,5	11,5	18	48	46	8	1.297.4001.50
M 50 x 1,5	13,5	20	60	55	8	1.297.5001.50
M 63 x 1,5	14,5	21	75	70	8	1.297.6301.50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hummel](#) manufacturer:

Other Similar products are found below :

[1.209.4002.31](#) [1.209.5001.31](#) [1161160050](#) [1.197.1200.50](#) [1.609.5000.50](#) [1.740.3203.51](#) [7.810.300.000](#) [7.820.400.000](#) [7.560.500.000](#)
[LCM16BE](#) [1.261.2900.10](#) [1.209.6300.30](#) [1.209.6301.31](#) [1.740.3203.50](#) [7.003.983.101](#) [7.R50.008.000](#) [LCM16B](#) [1.261.2001.50](#) [LCM16GE](#)
[1.209.1200.70](#) [1.209.5000.50](#) [1.293.1201.70](#) [1.609.6300.50](#) [1.106.6375.50](#) [1.740.1603.50](#) [1.740.1603.51](#) [7.003.910.102](#) [7.003.983.102](#)
[7.R52.408.000](#) [A712-7.K44.000.000](#) [LCM32B](#) [1.261.2501.50](#) [1.640.6300.51](#) [1.209.4002.30](#) [1.209.5002.31](#) [1.209.4001.31](#) [1.209.6300.31](#)
[1262200050](#) [1.097.2520.50](#) [1.209.6300.51](#) [1.239.1625.11](#) [1.609.2100.60](#) [1.609.5000.30](#) [1.292.2502.51](#) [1.875.1600.50](#) [7.010.901.001](#)
[7.166.500.000](#) [LCP07G](#) [1.895.3200.50](#) [1.209.5001.30](#)