



Datenblatt - Fiche technique - Data sheet




**12.99.3190**



VALUE USB 2.0 Adapter, Typ C - MicroB, ST/BU, OTG

VALUE Adaptateur USB 3.1, USB 3.1 Type C - MicroB , M/F, OTG

VALUE Adapter, USB3.1, C - Micro B, M/F, OTG

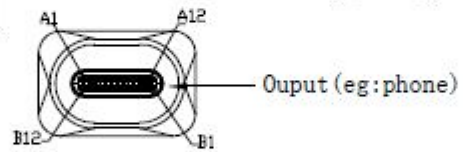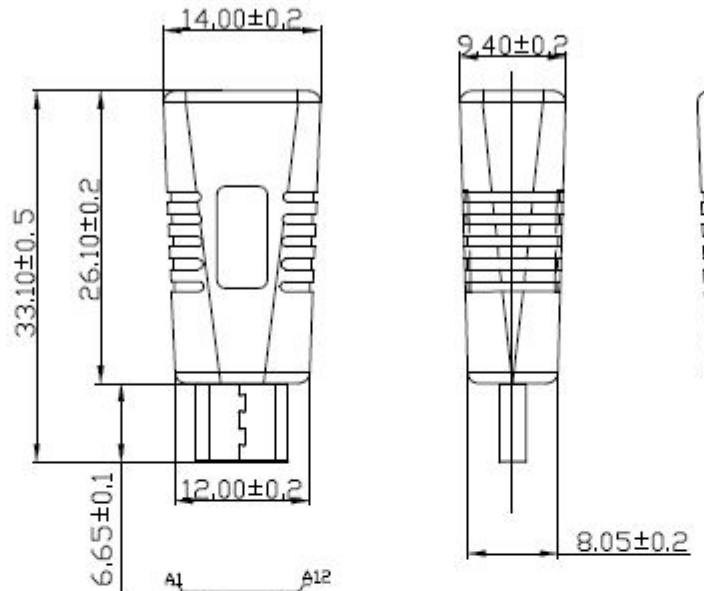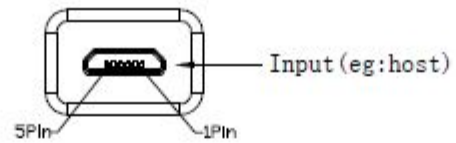

**NOTE:**

1. 100% open short & miss wire test:  
 Rated current:500mA Max  
 Rated voltage:5V Max  
 Contact resistance:3MΩ Max
2. RoHS 2.0 AND REACH COMPLIANT
3. Operation temperature:-10℃ ~ +60℃  
 Storage temperature:-20℃ ~ +75℃

**MATERIAL LIST:**

④	OUTER MOLD	PVC color For black	1	
③	PCB	USB CM-MICRO BM PCB	1	
②	USB 2.0 MICRO B TYPE	USB 2.0 MICRO B/F Type, The Pin Gold Plating, the shell for Nickel Plating	1	
①	USB C TYPE	USB C/M, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM NO.	COLOUR
12. 99. 3190	Black
DESC.	USB 2. 0 MICRO BF/CM



			2016. 07. 22	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SECOMP](#) manufacturer:*

Other Similar products are found below :

[26.11.0357](#)